人无我有，人有我优

强能电气

QNE ELECTRIC CO.,LTD

企业简介

QNE强能电气有限公司作为浙江省科技型企业,是专业生产尼龙电缆接头、金属电缆接头、格兰头、软管（浪管）接头、尼龙软管（浪管）等配线器材的研发生产一体型工贸企业。公司在贯彻ISO9001:2008质量体系下，产品相继通过了UL，CE，ROHS，IP68，SGS，Halogen Free等认证，并拥有多项技术专利。先进的生产设备、雄厚的技术力量和专业的工程团队使产品的质量超越了许多国内外的同行业生产商。产品出口到世界各地，主要市场包括东南亚，澳洲，北美，欧洲，俄罗斯，南非。

强能拥有经验丰富的工程师和强大的库存能力，在保证快速发货的同时，也提供从设计、开发、测样、认证、生产、质量控制、发货到售后的每一个阶段的完善解决方案和用心的服务。

更好的产品质量、有竞争力的价格、快速的物流体系、完善的服务是我们的发展的理念。挤身世界知名配线器材供应商的行列是我们的追求。强能正在寻求来自世界各地的分销商，我们期待您的加入。

欢迎参观强能电气！

Company introduction

As a scientific and technological enterprise in Zhejiang province, QNE Electric Co., Ltd. is a professional R&D manufacturer of nylon cable gland, metal cable gland, conduit fitting, and flexible conduit, etc wiring accessories. Under the applying of ISO9001: 2008 quality system, our products have got UL, CE, ROHS, PAHs,SGS, IP68, Halogen Free certificates and owned a number of technical patent. Advanced production equipment, abundant technical force and professional engineer team , etc. core advantages made our quality outstanding and beyond many domestic and foreign manufacturers of the industry. Products are exported to worldwide, whose main market including Southeast Asia, Australia, North America, Europe, Russia, South Africa.

QNE owns experienced engineers and strong inventory capacity, and we assure you fast delivery as well as perfect solutions from design, development, sample test, certification to production, quality control, delivery and after sales.

Better quality, competitive price, fast delivery and considerate service are our core concept of developing. Being one of the world renowned wiring accessory manufacturer is our permanent pursuit. QNE is seeking worldwide distributors, and we look forward to your participation.

WELCOME TO VISIT QNE ELECTRIC CO.,LTD !



尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)
P2-5



尼龙电缆防水接头（分体）
Nylon Cable Glands(Divided Structure)
P6-8



多孔&扁孔尼龙电缆接头
Multiple Hole & Flat Hole Nylon Cable Gland
P9-10



耐扭尼龙电缆接头（连体）
Spiral Nylon Cable Gland (United Structure)
P11-13



耐扭尼龙电缆接头（分体）
Spiral Nylon Cable Glands (Divided Structure)
P14-15

90度尼龙电缆防水接头（分体）
90 Degree Nylon Cable Glands
P16

90度耐扭尼龙电缆接头（分体）
90 Degree Spiral Nylon Cable Glands
P17

尼龙堵盖
Nylon Screw Plugs
P18

夹紧圈塞棒
EPDM Sealing Plugs
P19-20

对接式尼龙电缆接头
Two Side Connect Nylon Cable Gland
P21

黄铜电缆接头
Brass Cable Gland
P23-26

EMC金属电缆接头
EMC Metal Cable Gland
P27-30

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland
P31-36

不锈钢电缆接头
Stainless Steel Cable Gland
P37-38

金属变径环
Metal Reducer/Enlarger
P39



圆形黄铜堵盖
Round Shape Brass Screw Plugs
P40



圆形黄铜堵盖
Round Shape Brass Screw Plugs
P41



直通式黄铜电缆接头
Brass Cable Gland
P42-44



船用填料函
Marine Stuffing Box Joint
P45



日式船用填料函JT
(Japan Type)Marine Stuffing Box Joint
P46-47

金属电缆浪管接头
Metal Flexible Conduit Gland
P48-49



尼龙软管
Plastic Flexible Pipes
P51-54



波纹管快速接头
Quick Connector for Flexible Pipes
P55-56



90度波纹管快速接头
90 Degree Quick Connector for Flexible Pipes
P57-58



防水浪管接头
Watertight Corrugated Tubing Fitting
P59-61

90度防水浪管接头
90 Degree Watertight Corrugated Tubing Fitting
P62-63

高抗拉波纹管接头
Superb Pullout Strength Conduit Fitting
P64-65

超级抗拉快速浪管接头
Super Tensile Flexible Conduit Fitting
P66

尼龙软管支架
Bracket for Nylon Flexible Conduit
P67

PVC包塑金属软管
PVC Coated Flexible Steel Conduit
P68



尼龙材质金属软管接头
Nylon Conduit Fitting For Metal Flexible Conduit
P69-70



简式金属软管接头
Normal Metal Flexible Conduit Fitting
P71-72



防水金属软管接头
Liquid Tight Metal Flexible Conduit Fitting
P73-74



金属软管尾端护套
Nylon Ferrules For Metal Flexible Conduit
P75

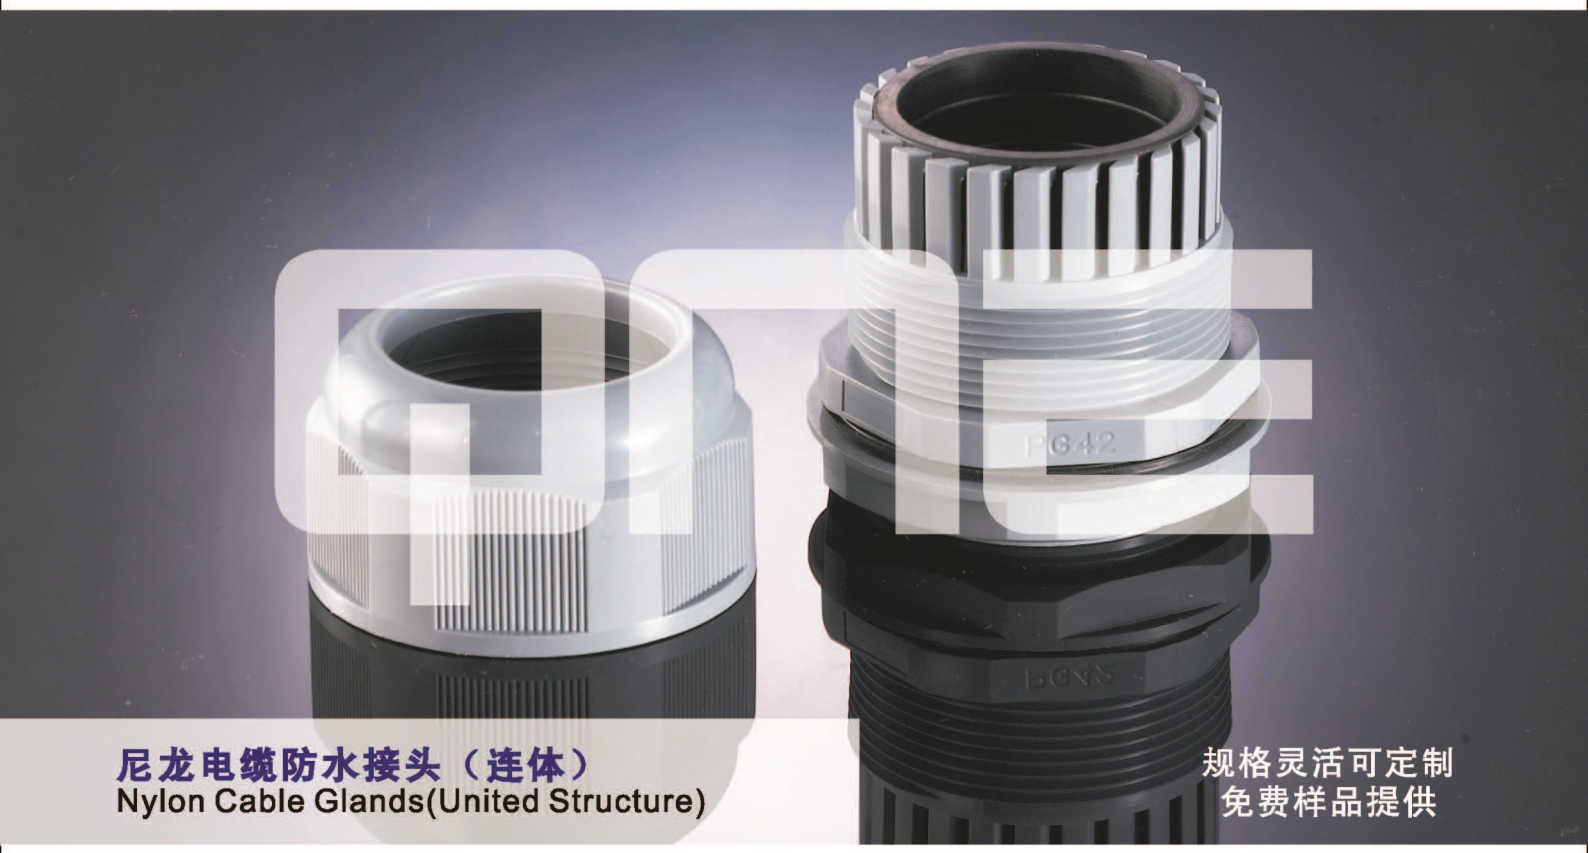

尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G（PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；
  (可定制UL认可的V-0防火等级尼龙原料)；B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005), gray(RAL7035), other color available upon request.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

A
Lock Nut
螺帽



B
washer
垫片



C
Body
基本幅体



D
Seal
夹紧圈

F
Sealing Nut
迫紧螺帽



QNE ELECTRIC

强能电气

QNE

⚠声明

强能版权所有 需授权使用

尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M8 x1.25	NCG-M8-4.8	2-4.8	8	7.5	13/12	50
M10x1.5	NCG-M10 -6	3-6	10	8	15/13	50
M12x1.5	NCG-M12S -6	3-6.5	12	8.5	18/15	50
	NCG-M12SL-6	3-6.5	12	15	18/15	50
	NCG-M12 -5	3-5.5	12	8.5	18/19	50
	NCG-M12 -7	4-8	12	8.5	18/19	50
	NCG-M12L -5	3-5.5	12	15	18/19	50
	NCG-M12L -7	4-8	12	15	18/19	50
M16x1.5	NCG-M16S -8	4-8	16	10	22/19	50
	NCG-M16SL-8	4-8	16	15	22/19	50
	NCG-M16 -7	3-7	16	10	22/22	50
	NCG-M16 -10	5-10	16	10	22/22	50
	NCG-M16L -7	3-7	16	15	22/22	50
	NCG-M16L -10	5-10	16	15	22/22	50
M18x1.5	NCG-M18 -7	3-7	18	10	24/22	50
	NCG-M18 -10	5-10	18	10	24/22	50
	NCG-M18L -7	3-7	18	15	24/22	50
	NCG-M18L -10	5-10	18	15	24/22	50
M20x1.5	NCG-M20S -12.5	6-12.5	20	10	27/24	50
	NCG-M20 -11	5-11	20	11	27/27	50
	NCG-M20 -13.5	8.5-14	20	11	27/27	50
	NCG-M20L -11	5-11	20	15	27/27	50
	NCG-M20L -13.5	8.5-14	20	15	27/27	50
M22x1.5	NCG-M22 -11	5-11	22	11	27/27	50
	NCG-M22 -13.5	8.5-14	22	11	27/27	50
M24x1.5	NCG-M24 -11	5-11	24	11	27/27	50
	NCG-M24 -13.5	8.5-14	24	11	27/27	50
M25x1.5	NCG-M25S -14	8.5-14	25	11.6	33/27	50
	NCG-M25 -13	7-13	25	11.6	33/33	50
	NCG-M25 -18	12.5-18	25	11.6	33/33	50
	NCG-M25L -13	7-13	25	15	33/33	50
	NCG-M25L -18	12.5-18	25	15	33/33	50
M32x1.5	NCG-M32S -17.5	11-17.5	32	15	36/42	20
	NCG-M32 -22	14-22	32	15	41/42	20
	NCG-M32 -25	17-25	32	15	41/42	20
M36x1.5	NCG-M36 -22	14-22	36	12	45/42	20
	NCG-M36 -25	17-25	36	12	45/42	20
M40x1.5	NCG-M40 -26.5	18-25	40	15	50/52	10
	NCG-M40 -31	23-32	40	15	50/52	10
M50x1.5	NCG-M50 -32	25-32	50	15	62/62	10
	NCG-M50 -41	30-41	50	15	62/62	10
M63x1.5	NCG-M63 -41	29-38	63	18	75/65	10
	NCG-M63 -46	35-46	63	18	75/65	10

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
PG7	NCG-PG7S -6	3-6.5	12.5	8	17/15	50
	NCG-PG7 -5	3-5.5	12.5	8	17/19	50
	NCG-PG7L -5	3-5.5	12.5	15	17/19	50
	NCG-PG7 -7	4-8	12.5	8	17/19	50
	NCG-PG7L -7	4-8	12.5	15	17/19	50
PG9	NCG-PG9 -5.5	3-5.5	15.2	8.2	22/19	50
	NCG-PG9L -5.5	3-5.5	15.2	15	22/19	50
	NCG-PG9 -7.5	4-8	15.2	8.2	22/19	50
	NCG-PG9L -7.5	4-8	15.2	15	22/19	50
PG11	NCG-PG11 -7	3-7	18.6	10	24/22	50
	NCG-PG11L -7	3-7	18.6	15	24/22	50
	NCG-PG11 -10	5-10	18.6	10	24/22	50
	NCG-PG11L -10	5-10	18.6	15	24/22	50
PG13.5	NCG-PG13.5-9	5-9	20.4	10	27/24	50
	NCG-PG13.5L -9	5-9	20.4	15	27/24	50
	NCG-PG13.5-12.5	6-12.5	20.4	10	27/24	50
	NCG-PG13.5L-12.5	6-12.5	20.4	15	27/24	50
PG16	NCG-PG16 -11	5-11	22.5	10.8	30/27	50
	NCG-PG16L -1	5-11	22.5	15	30/27	50
	NCG-PG16 -14	8.5-14	22.5	10.8	30/27	50
	NCG-PG16L -14	8.5-14	22.5	15	30/27	50
PG19	NCG-PG19 -11	5-11	24.0	11	30/27	50
	NCG-PG19L -11	5-11	24.0	15	30/27	50
	NCG-PG19 -14	8.5-14	24.0	11	30/27	50
	NCG-PG19L -14	8.5-14	24.0	15	30/27	50
PG21	NCG-PG21 -13	7-13	28.3	12	36/33	50
	NCG-PG21L -13	7-13	28.3	15	36/33	50
	NCG-PG21 -17.5	12.5-18	28.3	12	36/33	50
	NCG-PG21L -17.5	12.5-18	28.3	15	36/33	50
PG25	NCG-PG25 -20	14-20	30	13	36/37	50
	NCG-PG25L -20	14-20	30	15	36/37	50
PG29	NCG-PG29 -21	14-22	37	12	46/41	20
	NCG-PG29L -21	14-22	37	15	46/41	20
	NCG-PG29 -24	17-25	37	12	46/41	20
	NCG-PG29L -24	17-25	37	15	46/41	20
PG36	NCG-PG36 -25.5	17-25.5	47	14	57/52	10
	NCG-PG36 -31	24-32	47	14	57/52	10
PG42	NCG-PG42 -32	25-32	54	15	64/62	10
	NCG-PG42 -41	30-41	54	15	64/62	10
PG48	NCG-PG48 -38	29-38	59.3	18	70/65	10
	NCG-PG48 -45.5	35-45.5	59.3	18	70/65	10

尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
G(PF)1/4″	NCG-G1/4 -5	3-5.3	13.157	8.5	19/19	50
	NCG-G1/4 -8	4-8	13.157	8.5	19/19	50
G(PF)3/8″	NCG-G3/8 -7	3-7	16.662	10	22/22	50
	NCG-G3/8 -10	5-10	16.662	10	22/22	50
G(PF)1/2″	NCG-G1/2 -9	5-9	20.955	10	27/24	50
	NCG-G1/2 -12.5	6-12.5	20.955	10	27/24	50
G(PF)3/4″	NCG-G3/4 -13	7-13	26.441	12	36/33	50
	NCG-G3/4 -17.5	12.5-18	26.441	12	36/33	50
G(PF)1″	NCG-G1 -21	15-22	33.249	15	46/41	20
	NCG-G1 -24	17-25	33.249	15	46/41	20
G(PF)1 1/4″	NCG-G11/4-25.5	17-25.5	41.91	15	57/52	10
	NCG-G11/4-31	30-41	41.91	15	57/52	10
G(PF)1 1/2″	NCG-G11/2-25.5	25-32	48	15	60/62	10
	NCG-G11/2-31	24-32	48	15	60/62	10
G(PF)2″	NCG-G2-46	29-38	60	18	60/62	10
	NCG-G2-51	35-45.5	60	18	60/62	10
NPT1/4″	NCG-NPT1/4 -5.5	3-5.5	13.157	8.5	19	50
	NCG-NPT1/4 -6.8	4-8	13.157	8.5	19	50
NPT3/8″	NCG-NPT3/8 -7	3-7	16.662	10	22	50
	NCG-NPT3/8 -10	5-10	16.662	10	22	50
NPT1/2″	NCG-NPT1/2 -9	5-9	20.955	10	24	50
	NCG-NPT1/2 -13	6-12.5	20.955	10	24	50
NPT3/4″	NCG-NPT3/4 -13	7-13	26.441	15	33	50
	NCG-NPT3/4 -18	12.5-18	26.441	15	33	50
NPT1″	NCG-NPT1 -22	15-22	33.249	15	41	20
	NCG-NPT1 -25	17-25	33.249	15	41	20
NPT1 1/4″	NCG-NPT11/4-25.5	17-25.5	41.91	15	52	20
	NCG-NPT11/4-31	24-32	41.91	15	52	20

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

尼龙电缆防水接头（分体）
Nylon Cable Glands(Divided Structure)

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.E.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；
  (可定制UL认可的V-0防火等级尼龙原料)；B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C.E.F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design,sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

A	B	C	D	E	F
Lock Nut 螺帽	washer 垫片	Body 基本幅体	Seal 夹紧圈	Claw 夹聚爪	Sealing Nut 迫紧螺帽

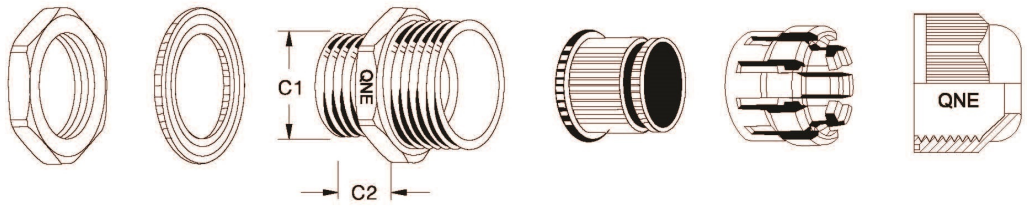

尼龙电缆防水接头（分体）
Nylon Cable Glands(Divided Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M12 x 1.5	NCG-M12A -5.5	3-5.5	12	8.5	18/19	50
	NCG-M12A -8	4.5-7.8	12	8.5	18/19	50
M16 x 1.5	NCG-M16AS -5.5-ST	3-5.5	16	10	22/19	50
	NCG-M16AS -8-ST	4-8	16	10	22/19	50
	NCG-M16AS -5.5	3-5.5	16	15	22/19	50
	NCG-M16AS -8	4-8	16	15	22/19	50
	NCG-M16A -7-ST	4-7	16	10	22/22	50
	NCG-M16A -10-ST	6-10	16	10	22/22	50
	NCG-M16A -7	4-7	16	15	22/22	50
	NCG-M16A -10	6-10	16	15	22/22	50
M20 x 1.5	NCG-M20AS -9-ST	5-9	20	10	24/24	50
	NCG-M20AS -12.5-ST	6-12.5	20	10	24/24	50
	NCG-M20A -11-ST	6-11	20	10	27/27	50
	NCG-M20A -14-ST	9-14	20	10	27/27	50
	NCG-M20A -11	6-11	20	15	27/27	50
	NCG-M20A -14	9-14	20	15	27/27	50
M22 x 1.5	NCG-M22A -11	6-11	20	15	27/27	50
	NCG-M22A -14	9-14	20	15	27/27	50
M25 x 1.5	NCG-M25AS -11--ST	6-11	25	10	33/27	50
	NCG-M25AS -14--ST	9-14	25	10	33/27	50
	NCG-M25A -16-ST	10-16	25	10	33/33	50
	NCG-M25A -18-ST	13-18	25	10	33/33	50
	NCG-M25A -16	10-16	25	15	33/33	50
	NCG-M25A -18	13-18	25	15	33/33	50
M32 x 1.5	NCG-M32A -22	15-22	32	15	41/42	20
	NCG-M32A -25	18-25	32	15	41/42	20
M40 x 1.5	NCG-M40A -26	20-26	40	20	50/52	10
	NCG-M40A -31	24-31	40	20	50/52	10
M50 x 1.5	NCG-M50A -33	25-33	50	22	62/62	10
	NCG-M50A -41	31-41	50	22	62/62	10
M63x 1.5	NCG-M63A -46	39-46	63	25	75/75	10
	NCG-M63A -51	44-51	63	25	75/75	10
M75 x 2.0	NCG-M75A -56	50-56	75	25	92/92	1
	NCG-M75A -66	56-66	75	25	92/92	1
M90 x 2.0	NCG-M90A -68	58-68	90	25	110/110	1
	NCG-M90A -77	66-77	90	25	110/110	1
PG7	NCG-PG7A -5.5	3-5.5	12.5	8	17/19	50
	NCG-PG7A -8	4.5-7.8	12.5	8	17/19	50
PG9	NCG-PG9A -5.5	3-5.5	15.2	8.2	22/19	50
	NCG-PG9A -8	4.5-7.8	15.2	8.2	22/19	50
PG11	NCG-PG11A -7	4-7	18.6	10	24/22	50
	NCG-PG11A -10	6-10	18.6	10	24/22	50
PG13.5	NCG-PG13.5A-8.8	5-8.8	20.4	10	27/24	50
	NCG-PG13.5A-12.5	7-12.5	20.4	10	27/24	50
PG16	NCG-PG16A -11	6-11	22.5	10.8	30/27	50
	NCG-PG16A -14	9-14	22.5	10.8	30/27	50
PG21	NCG-PG21A -16	10-16	28.3	12	36/33	50
	NCG-PG21A -18	13-18	28.3	12	36/33	50

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

尼龙电缆防水接头（分体）
Nylon Cable Glands(Divided Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
PG29	NCG-PG29A -22	15-22	37	12	46/41	20
	NCG-PG29A -24	18-25	37	12	46/41	20
PG36	NCG-PG36A -26	20-26	47	14	57/52	10
	NCG-PG36A -31	24-31	47	14	57/52	10
PG42	NCG-PG42A -33	25-33	54	15	64/62	10
	NCG-PG42A -41	31-41	54	15	64/62	10
G(PF)1/4″	NCG-G1/4A -5	3-5.3	13.157	8.5	19/19	50
	NCG-G1/4A -8	5-7.8	13.157	8.5	19/19	50
G(PF)3/8″	NCG-G3/8A -7	4-7	16.662	10	22/22	50
	NCG-G3/8A -10	6-10	16.662	10	22/22	50
G(PF)1/2″	NCG-G1/2A -9	5-8.8	20.955	10	27/24	50
	NCG-G1/2A -12.5	7-12.5	20.955	10	27/24	50
G(PF)3/4″	NCG-G3/4A -13	7-13	26.441	12	36/33	50
	NCG-G3/4A -17.5	12.5-18	26.441	12	36/33	50
G(PF)1″	NCG-G1A -21	15-22	33.249	15	46/41	20
	NCG-G1A -24	17-25	33.249	15	46/41	20
G(PF)1 1/4″	NCG-G1 1/4A-25.5	17-25.5	41.91	15	57/52	10
	NCG-G1 1/4A-31	24-32	41.91	15	57/52	10
G(PF)1 1/2″	NCG-G1 1/2A-33	25-33	48	22	60/62	10
	NCG-G1 1/2A-41	31-41	48	22	60/62	10
G(PF)2″	NCG-G2A-46	39-46	60	26	72/65	10
	NCG-G2A-51	44-51	60	26	72/65	10

多孔&扁孔尼龙电缆接头
Multiple Hole & Flat Hole Nylon Cable Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.E.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；
  (可定制UL认可的V-0防火等级尼龙原料)；B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃。
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C.E.F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005), gray(RAL7035), other color available upon request.

Note: Special size and type, please contact us

公制
Metric

G(PF)

PG

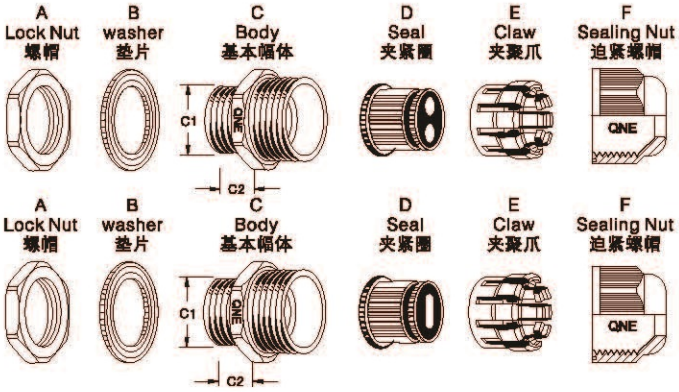

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

多孔&扁孔尼龙电缆接头
Multiple Hole & Flat Hole Nylon Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No. 黑色Black	编号 Item.No. 灰色Gray	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机扳口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	M12×1.5	MG12A-H2-03B	MG12A-H2-03G	3~1.2	12	12~12.3	9	18/19	50
	M16×1.5	MG16A-H2-04B	MG16A-H2-04G	4~1.6	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-H2-03B	MG20A-H2-03G	3.5~2	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-H2-06B	MG20A-H2-06G	6~2.5	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H2-05B	MG25A-H2-05G	5~2	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-H2-08B	MG25A-H2-08G	8.7~4.5	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H2-10B	MG32A-H2-10G	10~5	32	32~32.4	15	41/41	10
	M12×1.5	MG12A-H3-02B	MG12A-H3-02G	2.6~1.2	12	12~12.3	9	18/19	50
	M16×1.5	MG16A-H3-04B	MG16A-H3-04G	4~1.6	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-H3-03B	MG20A-H3-03G	3.5~1.5	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-H3-05B	MG20A-H3-05G	5~2	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H3-05B	MG25A-H3-05G	5~2	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-H3-08B	MG25A-H3-08G	8~4	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H3-10B	MG32A-H3-10G	10~5	32	32~32.4	15	41/41	10
	M12×1.5	MG12A-H4-02B	MG12A-H4-02G	2.3~1	12	12~12.3	9	18/19	50
	M16×1.5	MG16A-H4-03B	MG16A-H4-03G	3~1.2	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-H4-03B	MG20A-H4-03G	3.5~1.5	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-H4-04B	MG20A-H4-04G	4.5~2	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H4-05B	MG25A-H4-05G	5~2	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-H4-07B	MG25A-H4-07G	7~3.5	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H4-09B	MG32A-H4-09G	9~4.5	32	32~32.4	15	41/41	10
	M16×1.5	MG16A-H5-02B	MG16A-H5-02G	2.5~1	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-H5-03B	MG20A-H5-03G	3~1.2	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-H5-04B	MG20A-H5-04G	4.2~1.7	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H5-03B	MG25A-H5-03G	3.5~1.5	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-H5-06B	MG25A-H5-06G	6~3	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H5-08B	MG32A-H5-08G	8~4	32	32~32.4	15	41/41	10
	M16×1.5	MG16A-H6-02B	MG16A-H6-02G	2~1	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-H6-03B	MG20A-H6-03G	3~1.2	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H6-03B	MG25A-H6-03G	3.5~1.5	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-H6-05B	MG25A-H6-05G	5.3~2.4	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H6-07B	MG32A-H6-07G	7~3.5	32	32~32.4	15	41/41	10
	M20×1.5	MG20A-H7-03B	MG20A-H7-03G	3~1.2	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H7-03B	MG25A-H7-03G	3.5~1.5	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-H7-06B	MG32A-H7-06G	6~3	32	32~32.4	15	41/41	10
	M20×1.5	MG20A-H8-02B	MG20A-H8-02G	2.8~1	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-H8-03B	MG25A-H8-03G	3.5~1.5	25	25~25.4	15	33/33	50
	M16×1.5	MG16A-0610B	MG16A-06106	6×10	16	16~16.3	15	22/22	50
	M20×1.5	MG20A-06128	MG20A-06126	6.5×12	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-06148	MG20A-06146	6×14	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-07128	MG20A-07126	7×12	20	20~20.3	15	27/27	50
	M20×1.5	MG20A-07148	MG20A-07146	7×14	20	20~20.3	15	27/27	50
	M25×1.5	MG25A-06148	MG25A-06146	6×14	25	25~25.4	15	33/33	50
	M25×1.5	MG25A-0714B	MG25A-07146	7×14	25	25~25.4	15	33/33	50
	M32×1.5	MG32A-0822B	MG32A-08226	8×22	32	32~32.4	15	41/41	10
	M40×1.5	MG40A-10288	MG40A-10286	10×28.5	40	40~40.3	20	50/50	10
	M40×1.5	MG40A-0529B	MG40A-05296	5.5×29	40	40~40.3	20	50/50	10

耐扭尼龙电缆接头（连体）
Spiral Nylon Cable Gland (United Structure)

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；
  (可定制UL认可的V-0防火等级尼龙原料)；B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state , or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005), gray(RAL7035), other color available upon request.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

A
Lock Nut
螺帽

B
washer
垫片

C
Body
基本幅体



D
Seal
夹紧圈

F
Sealing Nut
迫紧螺帽



耐扭尼龙电缆接头（连体）
Spiral Nylon Cable Gland (United Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M12 x 1.5	SCG-M12S -6	2-6	12	8.5	18/15	50
	SCG-M12SL-6	2-6	12	15	18/15	50
	SCG-M12 -5	2-5	12	8.5	18/19	50
	SCG-M12 -7	3-7	12	8.5	18/19	50
	SCG-M12L -5	2-5	12	15	18/19	50
	SCG-M12L -7	3-7	12	15	18/19	50
M16 x 1.5	SCG-M16S -8	3-8	16	10	22/19	50
	SCG-M16SL-8	3-8	16	15	22/19	50
	SCG-M16 -7	3-7	16	10	22/22	50
	SCG-M16 -10	4-10	16	10	22/22	50
	SCG-M16L -7	3-7	16	15	22/22	50
	SCG-M16L -10	4-10	16	15	22/22	50
M18 x 1.5	SCG-M18 -7	3-7	18	10	24/22	50
	SCG-M18 -10	4-10	18	10	24/22	50
	SCG-M18L -7	3-7	18	15	24/22	50
	SCG-M18L -10	4-10	18	15	24/22	50
M20 x 1.5	SCG-M20S -9	4-9	20	10	27/24	20
	SCG-M20S -12.5	6-12.5	20	10	27/24	20
	SCG-M20SL -9	4-9	20	15	27/24	20
	SCG-M20SL -12.5	6-12.5	20	15	27/24	20
	SCG-M20 -11	5-11	20	11	27/27	20
	SCG-M20 -13.5	8-13.5	20	11	27/27	20
	SCG-M20L -11	5-11	20	15	27/27	20
	SCG-M20L -13.5	8-13.5	20	15	27/27	20
M22 x 1.5	SCG-M22 -11	5-11	22	11	30/27	20
	SCG-M22 -13.5	8-13.5	22	11	30/27	20
M25 x 1.5	SCG-M25S-11	5-11	25	11.6	33/27	20
	SCG-M25S-13.5	8-13.5	25	11.6	33/27	20
	SCG-M25 -16	8-16	25	11.6	33/33	20
	SCG-M25 -18	10-18	25	11.6	33/33	20
	SCG-M25L -16	8-16	25	15	33/33	20
	SCG-M25L -18	10-18	25	15	33/33	20
PG7	SCG-PG7S -6	2-6	12.5	8	17/15	50
	SCG-PG7 -5	2-5	12.5	8	17/19	50
	SCG-PG7 -7	3-7	12.5	8	17/19	50
PG9	SCG-PG9 -5.5	2-5.5	15.2	8.2	22/19	50
	SCG-PG9 -7.5	3-7.5	15.2	8.2	22/19	50
PG11	SCG-PG11-7	3-7	18.6	10	24/22	50
	SCG-PG11-10	4-10	18.6	10	24/22	50
PG13.5	SCG-PG13.5-9	4-9	20.4	10	27/24	20
	SCG-PG13.5-12.5	6-12.5	20.4	10	27/24	20
PG16	SCG-PG16-11	5-11	22.5	10.8	30/27	20
	SCG-PG16-14	8-14	22.5	10.8	30/27	20
PG19	SCG-PG19-11	5-11	24	10.8	30/27	20
	SCG-PG19-14	8-14	24	10.8	30/27	20
PG21	SCG-PG21-15.5	8-15.5	28.3	12	36/33	20
	SCG-PG21-17.5	10-18	28.3	12	36/33	20

耐扭尼龙电缆接头（连体）
Spiral Nylon Cable Gland (United Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
G(PF)3/8″	SCG-G3/8-7	3-7	16.7	10	22/22	50
	SCG-G3/8-10	4-10	16.7	10	22/22	50
G(PF)1/2″	SCG-G1/2-9	4-9	20.5	10	27/24	20
	SCG-G1/2-12.5	6-12.5	20.5	10	27/24	20
G(PF)3/4″	SCG-G3/4-16	8-16	26.4	12	33/27	20
	SCG-G3/4-18	10-18	26.4	12	33/27	20
NPT3/8″	SCG-NPT3/8-7	3-7	17	10	22	50
	SCG-NPT3/8-10	4-10	17	10	22	50
NPT1/2″	SCG-NPT1/2-9	5-9	24	10	24	20
	SCG-NPT1/2-13	7-13	24	10	24	20
NPT3/4″	SCG-NPT3/4-16	8-16	26.5	15	33	20
	SCG-NPT3/4-18	10-18	26.5	15	33	20

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

耐扭尼龙电缆接头（分体）
Spiral Nylon Cable Glands(Divided Structure)

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.E.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；
  (可定制UL认可的V-0防火等级尼龙原料)；B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C.E.F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design,sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

公制
Metric

A	B	C	D	E	F
Lock Nut 螺帽	washer 垫片	Body 基本幅体	Seal 夹紧圈	Claw 夹聚爪	Sealing Nut 迫紧螺帽

PG

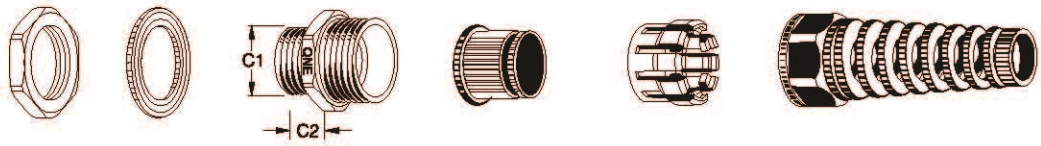

耐扭尼龙电缆接头（分体）
Spiral Nylon Cable Glands(Divided Structure)

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M12 x 1.5	SCG-M12A -5.5	3-5.5	12	8.5	18/19	50
	SCG-M12A -8	4.5-8	12	8.5	18/19	50
M16 x 1.5	SCG-M16AS-5.5-ST	3-5.5	16	10	22/19	50
	SCG-M16AS -8-ST	4.5-8	16	10	22/19	50
	SCG-M16A -7-ST	4-7	16	10	22/22	50
	SCG-M16A -10-ST	6-10	16	10	22/22	50
	SCG-M16AL -7	4-7	16	15	22/22	50
	SCG-M16AL -10	6-10	16	15	22/22	50
M20 x 1.5	SCG-M20AS -11	4-8.8	20	10	27/24	20
	SCG-M20AS -14	7-12.5	20	10	27/24	20
	SCG-M20A -11-ST	7-11	20	10	27/27	20
	SCG-M20A -14-ST	9-14	20	10	27/27	20
	SCG-M20AL -11	7-11	20	15	27/27	20
	SCG-M20AL -14	9-14	20	15	27/27	20
M22 x 1.5	SCG-M22A -11-ST	7-11	22	10	29/27	20
	SCG-M22A -14-ST	9-14	22	10	29/27	20
M25 x 1.5	SCG-M25A -16	12-16	25	15	33/33	20
	SCG-M25A -18	14-18	25	15	33/33	20
PG7	SCG-PG7A -5.5	3-5.5	12.5	8	17/19	50
	SCG-PG7A -8	4.5-8	12.5	8	17/19	50
PG9	SCG-PG9A -5.5	3-5.5	15.2	8.2	22/19	50
	SCG-PG9A -8	4.5-8	15.2	8.2	22/19	50
PG11	SCG-PG11A-7	4-7	18.6	10	24/22	50
	SCG-PG11A-10	6-10	18.6	10	24/22	50
PG13.5	SCG-PG13.5A-8.8	4-8.8	20.4	10	27/24	20
	SCG-PG13.5A-12.5	7-12.5	20.4	10	27/24	20
	SCG-PG13.5AZ-8.8	7-11	20.4	10	27/27	20
	SCG-PG13.5AZ-12.5	9-14	20.4	10	27/27	20
PG16	SCG-PG16A-11	7-11	22.5	10.8	30/27	20
	SCG-PG16A-14	9-14	22.5	10.8	30/27	20
PG21	SCG-PG21A-16	10-16	28.3	12	36/33	20
	SCG-PG21A-18	13-18	28.3	12	36/33	20
G(PF)1/4"	SCG-G1/4A -5	3-5.5	13.157	8.5	19/19	50
	SCG-G1/4A -8	4-8	13.157	8.5	19/19	50
G(PF)3/8"	SCG-G3/8A -7	4-7	16.662	15	22/22	50
	SCG-G3/8A -10	6-10	16.662	15	22/22	50
G(PF)1/2"	SCG-G1/2A -9	4-8.8	20.955	15	27/24	20
	SCG-G1/2A -12.5	7-12.5	20.955	15	27/24	20
G(PF)3/4"	SCG-G3/4A -13	7-13	26.441	15	36/33	20
	SCG-G3/4A -17.5	12.5-18	26.441	15	36/33	20

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

90度尼龙电缆防水接头（分体）
90 Degree Nylon Cable Glands

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.E.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成；(可定制UL认可的V-0防火等级尼龙原料)；
  B.D部分采用三元乙丙耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

公制
Metric

PG

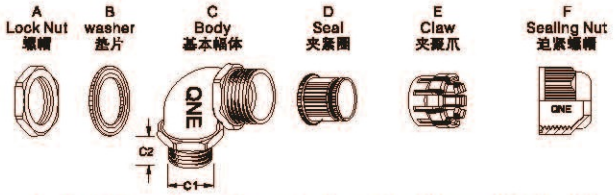

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C.E.F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts, (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design,sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid,alcohol,oil,grease and common solvency.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M16×1.5	ECG-M16A-7-ST	4-7	16	10	22/22	50
	ECG-M16A-10-ST	6-10	16	10	22/22	50
M20×1.5	ECG-M20A-11	6-11	20	15	27/27	50
	ECG-M20A-14	9-14	20	15	27/27	50
M25×1.5	ECG-M25A-16	10-16	25	15	33/33	50
	ECG-M25A-18	13-18	25	15	33/33	50
M32×1.5	ECG-M32A-22	15-22	32	15	41/42	10
	ECG-M32A-25	18-25	32	15	41/42	10
M40×1.5	ECG-M40A-26	20-26	40	20	50/52	10
	ECG-M40A-31	24-31	40	20	50/52	10

90度耐扭尼龙电缆接头（分体）
90 Degree Spiral Nylon Cable Glands

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.E.F部分采用UL认可之尼龙 PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料);B.D部分采用三元乙丙耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃;动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- 颜色种类：黑色、灰色，其它颜色可定做

注：特殊规格需要请联系工厂

公制
Metric

PG

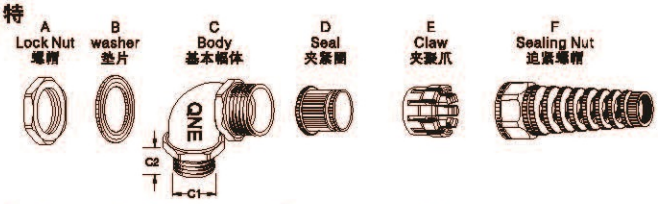

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2) for A. C.E.F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts,
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃
- Features: The claws and seals of excellent design,sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M16×1.5	SECG-M16A-7-ST	4-7	16	10	22/22	10
	SECG-M16A-10-ST	6-10	16	10	22/22	10
M20×1.5	SECG-M20A-11	6-11	20	15	27/27	10
	SECG-M20A-14	9-14	20	15	27/27	10
M25×1.5	SECG-M25A-16	10-16	25	15	33/33	10
	SECG-M25A-18	13-18	25	15	33/33	10

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

尼龙堵盖
Nylon Screw Plugs

规格灵活可定制
免费样品提供

- 产品材质:尼龙PA66
- 保护等级:IP68
- 工作温度:-40℃至100℃
- 颜色种类:灰色、黑色、其他颜色可定做

注：特殊规格需要请联系工厂

- Material:Nylon PA66
- Protection degree:IP68
- Working temperature:-40℃ to 100℃
- Application:Dust-proof for spare holes
- Colours:Black and gray

Note: Special size and type, please contact us

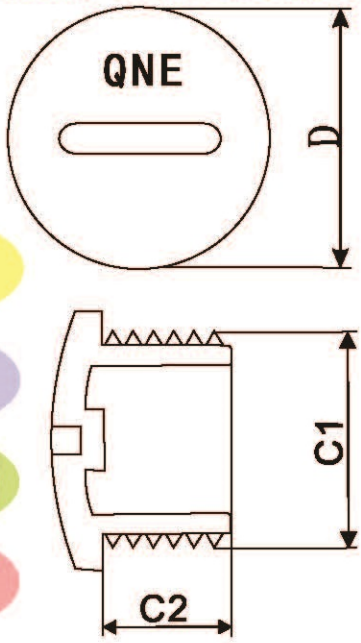

公制
Metric

PG

G(PF)

NPT

型号 Type	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	闷盖外径 D mm
PG7	12.5	9.5	16.5
PG9	15.2	9.5	19.2
PG11	18.6	10	22.6
PG13.5	20.4	11	24.4
PG16	22.5	11	26.5
PG21	28.3	11	32.3
PG29	37	12	33
PG36	47	12	53
PG42	54	12	60
PG48	59.3	12	65.3
M10×1.5	10	9.5	16
M12×1.5	12	9.5	16
M16×1.5	16	10	20
M18×1.5	18	11	22
M20×1.5	20	11	24
M22×1.5	22	11	26
M25×1.5	25	11	29
M27×1.5	27	11	33
M32×1.5	32	11	38
M40×1.5	40	12	46
M50×1.5	50	12	56
M63×1.5	63	12	69

G(PF),NPT系列可定做

夹紧圈塞棒
EPDM Sealing Plugs

规格灵活可定制
免费样品提供

- 产品材质：以EPDM料制成
- 颜色种类：黑色。
- 安装方式：直接将塞棒安插在孔径中，再迫紧螺帽即可。
- 适用范围：配合QNE电缆固定头使用

注：特殊规格需要请联系工厂

- Material: EPDM rubber
- Colour: Black
- Application: To seal spare cable glands and multiple hole seals of cable glands against dust and for water-proof.

Note: Special size and type, please contact us

单孔塞棒 EPDM Sealing Plugs for Single Hole Cable Gland

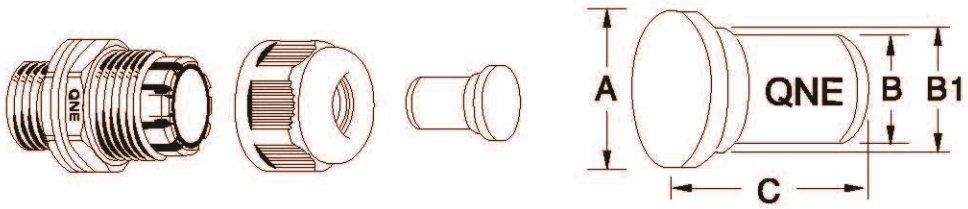

多孔塞棒EPDM Sealing Plugs for Multiple Hole Cable Gland

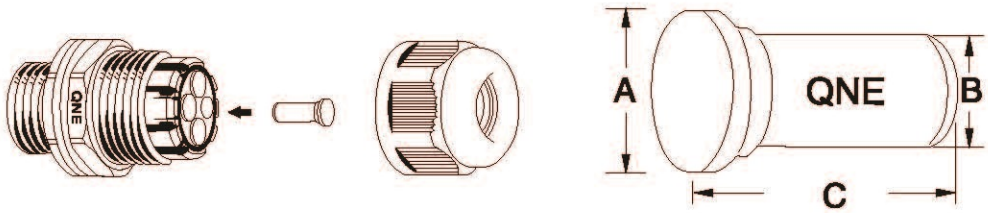

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

夹紧圈塞棒
EPDM Sealing Plugs

规格灵活可定制
免费样品提供

单孔塞棒 EPDM Sealing Plugs for Single Hole Cable Gland

编号 Item.No. 黑色 (Black)	外径 O.D. A	B	B1	长度 Length C	包装 Std.Pkg (pcs)
SPR-055A-B	11	5.5	8.7	18	100
SPR-055B-B	9.6	5.5	7.1	18	100
SPR-067-B	9.5	6.7	7.2	18	100
SPR-071-B	13.2	7	10.7	18	100
SPR-079-B	11	7.9	8.7	18	100
SPR-092-B	15.5	9.2	12.7	18	100
SPR-103-B	13.5	10.3	10.7	18	100
SPR-105-B	17	10.5	14.3	18	100
SPR-118-B	17	11.8	14.3	18	100
SPR-120-B	15.5	12	12.7	18	100
SPR-140-B	17	14	14.4	18	100
SPR-158-B	22	15.8	19.3	18	50
SPR-178-B	22	17.8	19.3	18	50
SPR-215-B	28	21.5	25	18	50
SPR-245-B	28	24.5	25	18	50
SPR-262-B	35	26.2	33	20	10
SPR-306-B	36	30.6	33	20	10
SPR-333-B	45	33.3	43.1	20	10
SPR-410-B	46	41	43.1	20	10
SPR-473-B	53	47.3	51.6	20	10
SPR-515-B	54.5	51.5	-	20	10

多孔塞棒EPDM Sealing Plugs for Multiple Hole Cable Gland

编号 Item.No. 黑色 (Black)	外径 O.D. A	B	长度 Length C	包装 Std.Pkg (pcs)
SPM-020-B	3	2	15	100
SPM-023-B	3	2.3	15	100
SPM-026-B	3.6	2.6	15	100
SPM-030-B	4	3	15	100
SPM-032-B	4.2	3.2	15	100
SPM-034-B	4.4	3.4	15	100
SPM-037-B	4.7	3.7	15	100
SPM-041-B	5.1	4.1	15	100
SPM-050-B	6	5	15	100
SPM-053-B	6.3	5.3	15	100
SPM-060-B	7.5	6	15	100
SPM-070-B	8.5	7	15	100
SPM-073-B	8.5	7.3	15	100
SPM-080-B	9.5	8	15	100
SPM-090-B	10.5	9	15	100
SPM-100-B	11.5	10	15	100

对接式尼龙电缆接头
Two Side Connect Nylon Cable Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：UL认可之尼龙 PA66(防火等级UL94V-2,可定制UL认可的V-0防火等级尼龙原料)；三元乙丙耐候橡胶（可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68
- 工作温度：-40℃至100℃
- 颜色种类：黑色、灰色，其他颜色可定做
- 应用：广泛应用于LED灯线路组合，能够从两端进行连接并提供灯具设计方案

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2, accept to make flammability UL 94V-0); Weather resistant EPDM rubber(Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- Protection degree: IP68
- Working temperature: -40℃ to 100℃
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.
- Application: Widely used in wire connection of LED Light and can be connected from two side.

Note: If you need special size and type, please contact us

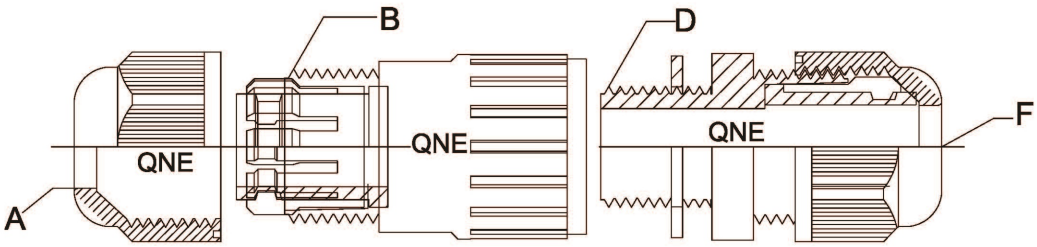

编号 Item.No.	电缆范围 Cable RangeΦ(mm)		螺纹外径 Thread O.D.(mm)		扳手径 Spanner Size(mm)		包装 Std.Pkg (pcs)
	A Part	F Part	B Part	D Part	A Part	F Part	
TNCG-M20S-12.5	4-8	6-12.5	20	20	22	27	20
TNCG-M20-14	4-8	8.5-14	20	20	22	27	20
TNCG-PG9-5.5	3-5.5	3-5.5	15.2	15.2	19	19	20
TNCG-PG9-5.5	4-8	4-8	15.2	15.2	19	19	20

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically)

QNE ELECTRIC

强 能 电 气

QNE

⚠声明

强能版权所有 需授权使用

黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G（PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分以黄铜镀镍制成；E部分以UL认可之尼龙PA66制成(防火等级UL94V-2)；B.D部分采用三元乙丙耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc).
- Protection degree: IP68
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

A Lock Nut 螺帽

B washer 垫片

C Body 基本幅体

D Seal 夹紧圈

E Claw 夹聚爪

F Sealing Nut 迫紧螺帽

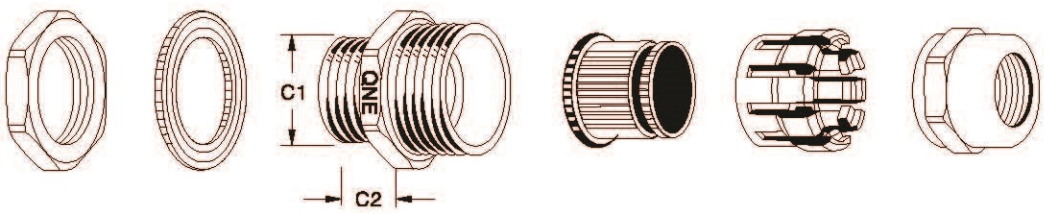

黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M6 x 1	BCG-M6 -3	2-3	6	5	9/9	20
M8 x 1.25	BCG-M8 -4.8	3-4.8	8	5.5	11/11	20
M10 x 1.5	BCG-M10 -5.5	3-5.5	10	7	14/14	20
M12 x1.5	BCG-M12S-5.5	3-6.5	12	7	14/14	20
	BCG-M12 -5.5	3-5.5	12	8	17/17	10
	BCG-M12 -7.8	4.5-8	12	8	17/17	10
	BCG-M12S-5.5-L	3-6.5	12	15	14/14	20
	BCG-M12 -5.5-L	3-5.5	12	15	17/17	10
	BCG-M12 -7.8-L	4.5-8	12	15	17/17	10
M16 x1.5	BCG-M16S-5.5	3-5.5	16	8	18/18	10
	BCG-M16S-7.8	4.5-8	16	8	18/18	10
	BCG-M16S-5.5-L	3-5.5	16	15	18/18	10
	BCG-M16S-7.8-L	4.5-8	16	15	18/18	10
	BCG-M16 -7	4-7	16	8	22/22	10
	BCG-M16 -10	6-10	16	8	22/22	10
	BCG-M16 -7-L	4-7	16	15	22/22	10
	BCG-M16 -10-L	6-10	16	15	22/22	10
M18 x1.5	BCG-M18 -7	4-7	18	8	22/22	10
	BCG-M18 -10	6-10	18	8	22/22	10
	BCG-M18 -7-L	4-7	18	15	22/22	10
	BCG-M18 -10-L	6-10	18	15	22/22	10
M20 x1.5	BCG-M20S-8.8	4-8.8	20	9.5	24/24	10
	BCG-M20S-12.5	7-12.5	20	9.5	24/24	10
	BCG-M20S-8.8-L	4-8.8	20	15	24/24	10
	BCG-M20S-12.5-L	7-12.5	20	15	24/24	10
	BCG-M20 -11	7-11	20	9.5	25/25	10
	BCG-M20 -14	9-14	20	9.5	25/25	10
	BCG-M20 -11-L	7-11	20	15	25/25	10
	BCG-M20 -14-L	9-14	20	15	25/25	10
M22 x 1.5	BCG-M22 -11	7-11	22	9.5	25/25	10
	BCG-M22-14	9-14	22	9.5	25/25	10
	BCG-M22 -11-L	7-11	22	15	25/25	10
	BCG-M22 -14-L	9-14	22	15	25/25	10
M24 x 1.5	BCG-M24-16	12-16	24	12	30/30	10
	BCG-M24-18	14-18	24	12	30/30	10
	BCG-M24 -16-L	12-16	24	15	30/30	10
	BCG-M24 -18-L	14-18	24	15	30/30	10
M25 x 1.5	BCG-M25S-11	7-11	25	12	25/25	10
	BCG-M25S-14	9-14	25	12	25/25	10
	BCG-M25S-11-L	7-11	25	15	25/25	10
	BCG-M25S-14-L	9-14	25	15	25/25	10
	BCG-M25 -16	12-16	25	12	30/30	10
	BCG-M25 -18	14-18	25	12	30/30	10
	BCG-M25 -16-L	12-16	25	15	30/30	10
	BCG-M25 -18-L	14-18	25	15	30/30	10

黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M32 x 1.5	BCG-M32 -22	16-22	32	12.5	40/40	10
	BCG-M32 -25	18-25	32	12.5	40/40	10
	BCG-M32 -22-L	16-22	32	15	40/40	10
	BCG-M32 -25-L	18-25	32	15	40/40	10
M40 x 1.5	BCG-M40 -26	21-26	40	15	50/50	10
	BCG-M40 -31	24-31	40	15	50/50	10
	BCG-M40 -26-L	21-26	40	20	50/50	10
	BCG-M40 -31-L	24-31	40	20	50/50	10
M50 x 1.5	BCG-M50 -33	25-33	50	15	59/59	5
	BCG-M50 -41	31-41	50	15	59/59	5
	BCG-M50 -33-L	25-33	50	22	59/59	5
	BCG-M50 -41-L	31-41	50	22	59/59	5
M63 x 1.5	BCG-M63 -45	35-45	63	17	69/69	1
M63 x 1.5	BCG-M63L-46	39-46	63	17	75/75	1
M63 x 1.5	BCG-M63L-51	44-51	63	17	75/75	1
M75 x 2	BCG-M75 -56	50-56	75	22	93/93	1
M75 x 2	BCG-M75 -66	56-66	75	22	93/93	1
M80 x 2	BCG-M80 -56	50-56	80	22	93/93	1
M80 x 2	BCG-M80 -66	56-66	80	22	93/93	1
M90 x 2	BCG-M90 -68	58-68	90	24	110/110	1
M90 x 2	BCG-M90 -77	66-77	90	24	110/110	1
M100 x 2	BCG-M100 -68	58-68	100	24	110/110	1
M100 x 2	BCG-M100 -77	66-77	100	24	110/110	1
PG7	BCG-PG7S-5.5	3-6.5	12.5	7	14/14	20
	BCG-PG7 -5.5	3-5.5	12.5	8	17/17	10
	BCG-PG7 -7.8	4.5-8	12.5	8	17/17	10
	BCG-PG7S-5.5-L	3-6.5	12.5	15	14/14	20
	BCG-PG7 -5.5-L	3-5.5	12.5	15	17/17	10
	BCG-PG7 -7.8-L	4.5-8	12.5	15	17/17	10
PG9	BCG-PG9 -5.5	3-5.5	15.2	8	18/18	10
	BCG-PG9 -7.8	4.5-8	15.2	8	18/18	10
	BCG-PG9 -5.5-L	3-5.5	15.2	15	18/18	10
	BCG-PG9 -7.8-L	4.5-8	15.2	15	18/18	10
PG11	BCG-PG11-7	4-7	18.6	9	22/22	10
	BCG-PG11-10	6-10	18.6	9	22/22	10
	BCG-PG11-7-L	4-7	18.6	15	22/22	10
	BCG-PG11-10-L	6-10	18.6	15	22/22	10
PG13.5	BCG-PG13.5-8.8	4-8.8	20.4	9.5	24/24	10
	BCG-PG13.5-12.5	7-12.5	20.4	9.5	24/24	10
	BCG-PG13.5-8.8-L	4-8.8	20.4	15	24/24	10
	BCG-PG13.5-12.5-L	7-12.5	20.4	15	24/24	10
PG16	BCG-PG16-11	7-11	22.5	9.5	25/25	10
	BCG-PG16-14	9-14	22.5	9.5	25/25	10
	BCG-PG16-11-L	7-11	22.5	15	25/25	10
	BCG-PG16-14-L	9-14	22.5	15	25/25	10

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
PG21	BCG-PG21-16	12-16	28.3	12	30/30	10
	BCG-PG21-18	14-18	28.3	12	30/30	10
	BCG-PG21-16-L	12-16	28.3	15	30/30	10
	BCG-PG21-18-L	14-18	28.3	15	30/30	10
PG29	BCG-PG29-22	16-22	37	12.5	40/40	10
	BCG-PG29-25	18-25	37	12.5	40/40	10
	BCG-PG29-22-L	16-22	37	15	40/40	10
	BCG-PG29-25-L	18-25	37	15	40/40	10
PG36	BCG-PG36-26	21-26	47	15	50/50	10
	BCG-PG36-31	24-31	47	15	50/50	10
PG42	BCG-PG42-33	25-33	54	15	59/59	10
	BCG-PG42-41	31-41	54	15	59/59	10
PG48	BCG-PG48-45	35-45	59.3	17	69/69	5
G(PF)1/4″	BCG-PF 1/4 -5.5	3-5.5	13.1	8	18/18	10
	BCG-PF 1/4 -7.8	4.5-8	13.1	8	18/18	10
G(PF)3/8″	BCG-PF 3/8-7	4-7	16.6	9	22/22	10
	BCG-PF 3/8-10	6-10	16.6	9	22/22	10
G(PF)1/2″	BCG-PF 1/2S-8.8	4-8.8	20.9	9.5	24/24	10
	BCG-PF 1/2S-12.5	7-12.5	20.9	9.5	24/24	10
	BCG-PF 1/2-11	7-11	20.9	9.5	25/25	10
	BCG-PF 1/2-14	9-14	20.9	9.5	25/25	10
G(PF) 3/4″	BCG-PF 3/4-16	12-16	26.4	12	30/30	10
	BCG-PF 3/4-18	14-18	26.4	12	30/30	10
G(PF) 1″	BCG-PF 1-22	16-22	33.2	12.5	40/40	10
	BCG-PF 1-25	18-25	33.2	12.5	40/40	10
G(PF)1 1/4″	BCG-PF1 1/4-26	21-26	41.9	15	50/50	10
	BCG-PF1 1/4-31	24-31	41.9	15	50/50	10
G(PF)1 1/2″	BCG-PF1 1/2-33	25-33	48	15	59/59	10
	BCG-PF1 1/2-41	31-41	48	15	59/59	10
G(PF) 2″	BCG-PF 2-45	35-45	60	17	69/69	5
NPT1/4″	BCG-NPT 1/4 -5.5	3-5.5	13.1	8	18	10
	BCG-NPT 1/4 -7.8	4.5-8	13.1	8	18	10
NPT3/8″	BCG-NPT 3/8-7	4-7	16.6	9	22	10
	BCG-NPT 3/8-10	6-10	16.6	9	22	10
NPT1/2″	BCG-NPT 1/2S-8.8	4-8.8	20.9	9.5	24	10
	BCG-NPT 1/2S-12.5	7-12.5	20.9	9.5	24	10
	BCG-NPT 1/2-11	7-11	20.9	9.5	25	10
	BCG-NPT 1/2-14	9-14	20.9	9.5	25	10
NPT3/4″	BCG-NPT 3/4-16	12-16	26.4	12	30	10
	BCG-NPT 3/4-18	14-18	26.4	12	30	10
NPT1″	BCG-NPT 1-22	16-22	33.2	12.5	40	10
	BCG-NPT 1-25	18-25	33.2	12.5	40	10
NPT1 1/4″	BCG-NPT 1 1/4-26	21-26	41.9	15	50	10
	BCG-NPT 1 1/4-31	24-31	41.9	15	50	10
NPT1 1/2″	BCG-NPT 1 1/2-33	25-33	48	15	59	10
	BCG-NPT 1 1/2-41	31-41	48	15	59	10
NPT2″	BCG-NPT 2-45	35-45	60	17	69	5

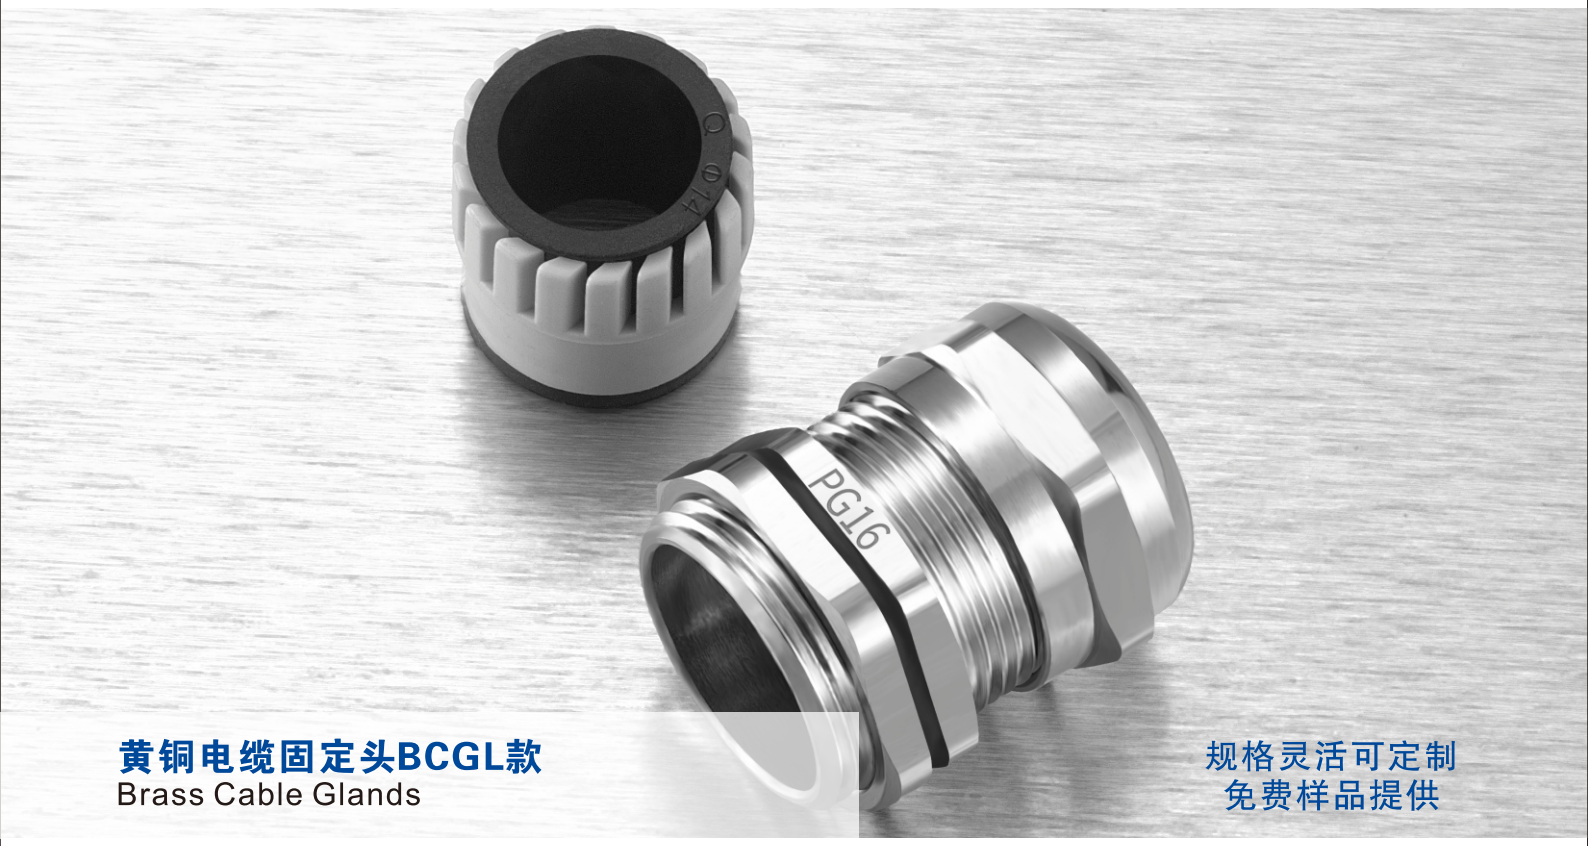

黄铜电缆固定头BCGL款
Brass Cable Glands

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G（PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分以黄铜镀镍制成，E部分以UL认可之尼龙PA66制成
  (防火等级UL94V-2),BD部分采用EPDM耐候橡胶制成。
  (可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68
- 工作温度：静态-40℃至100℃,或瞬间可耐热至120℃；(可定制-60℃至220℃)
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Brass with nickel plated for A. C. F parts, UL approved Nylon Pa66
  (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts.
  (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc).
- Protection degree: IP68
- Working temperature: -40℃ to 100℃
- Features: The claws and seals of excellent design, can hold cable firmly and have a wider cable range.
  Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

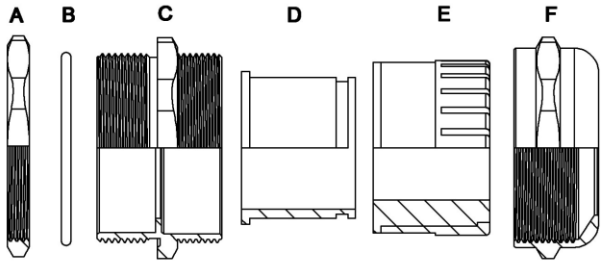



黄铜电缆固定头BCGL款
Brass Cable Glands

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M10 x 1.5	BCGL-M10-6.5	3-6.5	10	6.5	14/14	20
M12 x1.5	BCGL-M12S-6.5	3-6.5	12	6.5	14/14	20
	BCGL-M12-8	4.5-8	12	8	17/14	20
M16 x 1.5	BCGL-M16S-8	4.5-8	16	8	17/18	20
	BCGL-M16-10	6-10	16	8	20/18	20
M18 x 1.5	BCGL-M18S-8	4.5-8	16	8	17/20	20
	BCGL-M18-10	610	16	8	20/20	20
M20 x 1.5	BCGL-M20M-10	6-10	20	8	17/22	20
	BCGL-M20S-12	7-12	20	8	22/22	20
	BCGL-M20-14	9-14	20	8	24/22	20
M22 x 1.5	BCGL-M22S-12	7-12	22	8	22/24	20
	BCGL-M22-14	9-14	22	8	24/24	20
M24 x 1.5	BCGL-M24S-14	9-14	24	9	24/27	20
	BCGL-M24-16	12-16	24	9	27/27	20
M25 x 1.5	BCGL-M25M-14	9-14	25	9	24/27	20
	BCGL-M25S-16	12-16	25	9	27/27	20
	BCGL-M25-18	14-18	25	9	30/27	20
M27 x 1.5	BCGL-M27-18	14-18	27	9	30/30	20
M30 x 1.5	BCGL-M30-18	14-18	30	9	30/32	20
M32 x 1.5	BCGL-M32S-18	14-18	32	10	30/35	20
	BCGL-M32-22	18-22	32	10	35/35	20
	BCGL-M32Z-25	20-25	32	10	40/35	20
M36 x 1.5	BCGL-M36-25	18-22	36	10	40/40	20
M40 x 1.5	BCGL-M40M-22	18-22	40	11	35/45	10
	BCGL-M40S-25	21-25	40	11	40/45	10
	BCGL-M40-30	24-30	40	11	45/45	10
M50 x 1.5	BCGL-M50-33	25-33	50	13	50/55	5
	BCGL-M50-38	32-38	50	13	57/55	5
M60 x 1.5	BCGL-M60-44	37-44	60	14	64/69	5
M63 x 1.5	BCGL-M63-44	37-44	63	14	64/69	5

黄铜电缆固定头BCGL款
Brass Cable Glands

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
PG7	BCGL-PG7S-6.5	3-6.5	12.5	6.5	14/14	20
	BCGL-PG7-8	4.5-8	12.5	8	14/14	20
PG9	BCGL-PG9-8	4.5-8	15.2	8	17/18	20
PG11	BCGL-PG11-8	4.5-8	18.6	8	17/22	20
	BCGL-PG11-10	6-10	18.6	8	20/22	20
PG13.5	BCGL-PG13.5-10	6-10	20.4	8	20/24	20
	BCGL-PG13.5-12	7-12	20.4	8	22/24	20
PG16	BCGL-PG16-11	7-12	22.5	8	22/25	20
	BCGL-PG16-14	9-14	22.5	8	24/25	20
PG19	BCGL-PG19-14	9-14	24	9	24/27	20
	BCGL-PG19-16	12-16	24	9	27/27	20
PG21	BCGL-PG21-16	12-16	28.3	9	27/30	20
	BCGL-PG21-18	14-18	28.3	9	30/30	20
PG25	BCGL-PG25-18	14-18	30	10	30/35	20
	BCGL-PG25-22	18-22	30	10	35/35	20
PG29	BCGL-PG29-22	16-22	37	10	35/40	20
	BCGL-PG29-25	18-25	37	10	40/40	20
PG36	BCGL-PG36-30	24-30	47	11	45/50	10
	BCGL-PG36-33	25-33	47	11	50/50	10
PG42	BCGL-PG42-33	25-33	54	13	50/57	5
	BCGL-PG42-38	32-38	54	13	57/57	5
PG48	BCGL-PG48-44	37-44	59.3	14	64/64	5
G1/4	BCGL-G1/4-6.5	3-6.5	13.1	6.5	14/15	20
G3/8	BCGL-G3/8-8	4.5-8	16.6	8	17/20	20
G1/2	BCGL-G1/2-12	7-12	20.9	8	20/24	20
G3/4	BCGL-G3/4-18	14-18	26.4	9	30/30	20
G1	BCGL-G1-25	18-25	33.2	10	40/40	20
G1-1/4	BCGL-G1-1/4-33	25-33	41.9	11	50/50	10
G1-1/2	BCGL-G1-1/2-38	32-38	48	12	57/57	5
G2	BCGL-G2-44	37-44	60	14	64/64	5
NPT1/4	BCGL-NPT1/4-6.5	3-6.5	13.1	6.5	14	20
NPT3/8	BCGL-NPT3/8-8	4.5-8	16.6	8	17	20
NPT1/2	BCGL-NPT1/2-12	6-12	20.9	8	20	20
NPT3/4	BCGL-NPT3/4-18	13-18	26.4	9	30	20
NPT1-25	BCGL-NPT1-25	18-25	33.2	10	40	20
NPT1-1/4	BCGL-NPT1-1/4-33	25-33	41.9	11	50	10
NPT1-1/2	BCGL-NPT1-1/2-38	32-38	48	12	57	5
NPT2	BCGL-NPT2-44	37-44	60	14	64	5

EMC金属电缆接头
EMC Metal Cable Gland

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A. C. D1. F 部分以铜合金镀镍制成，E 部分以UL认可之尼龙PA66制成（防火等级UL 94V-2），B及D部分采用EPDM耐候橡胶制成。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for A. C. D1. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts.
- Protection degree: IP68-10 Bar
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

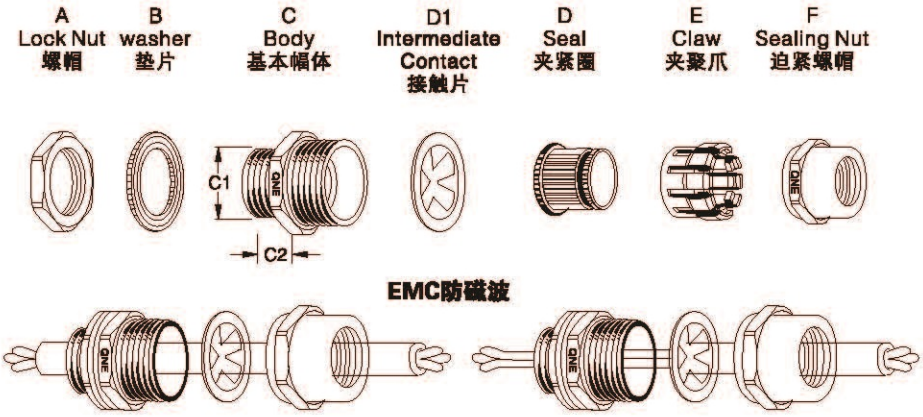

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

EMC金属电缆接头
EMC Metal Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M12 x1.5	EMC-MBA12 -5.5	3-5.5	12	8	17/17	10
	EMC-MBA12 -7.8	4.5-8	12	8	17/17	10
	EMC-MBA12 -5.5-L	3-5.5	12	15	17/17	10
	EMC-MBA -7.8-L	4.5-8	12	15	17/17	10
M16 x1.5	EMC-MBA16S-5.5	3-5.5	16	8	18/18	10
	EMC-MBA16S-7.8	4.5-8	16	8	18/18	10
	EMC-MBA16S-5.5-L	3-5.5	16	15	18/18	10
	EMC-MBA16S-7.8-L	4.5-8	16	15	18/18	10
	EMC-MBA16 -7	4-7	16	8	22/22	10
	EMC-MBA16 -10	6-10	16	8	22/22	10
	EMC-MBA16 -7-L	4-7	16	15	22/22	10
	EMC-MBA16 -10-L	6-10	16	15	22/22	10
M18 x1.5	EMC-MBA18 -7	4-7	18	8	22/22	10
	EMC-MBA18 -10	6-10	18	8	22/22	10
	EMC-MBA18 -7-L	4-7	18	15	22/22	10
	EMC-MBA18 -10-L	6-10	18	15	22/22	10
M20 x1.5	EMC-MBA20S-8.8	4-8.8	20	9.5	24/24	10
	EMC-MBA20S-12.5	7-12.5	20	9.5	24/24	10
	EMC-MBA20S-8.8-L	4-8.8	20	15	24/24	10
	EMC-MBA20S-12.5-L	7-12.5	20	15	24/24	10
	EMC-MBA20 -11	7-11	20	9.5	25/25	10
	EMC-MBA20 -14	9-14	20	9.5	25/25	10
	EMC-MBA20 -11-L	7-11	20	15	25/25	10
	EMC-MBA20 -14-L	9-14	20	15	25/25	10
M22 x1.5	EMC-MBA22 -11	7-11	22	9.5	25/25	10
	EMC-MBA22-14	9-14	22	9.5	25/25	10
	EMC-MBA22 -11-L	7-11	22	15	25/25	10
	EMC-MBA22 -14-L	9-14	22	15	25/25	10
M24 x1.5	EMC-MBA24-16	12-16	24	12	30/30	10
	EMC-MBA24-18	14-18	24	12	30/30	10
	EMC-MBA24 -16-L	12-16	24	15	30/30	10
	EMC-MBA24 -18-L	14-18	24	15	30/30	10
M25 x 1.5	EMC-MBA25S-11	7-11	25	12	25/25	10
	EMC-MBA25S-14	9-14	25	12	25/25	10
	EMC-MBA25S-11-L	7-11	25	15	25/25	10
	EMC-MBA25S-14-L	9-14	25	15	25/25	10
	EMC-MBA25 -16	12-16	25	12	30/30	10
	EMC-MBA5 -18	14-18	25	12	30/30	10
	EMC-MBA25 -16-L	12-16	25	15	30/30	10
	EMC-MBA25 -18-L	14-18	25	15	30/30	10
M32 x 1.5	EMC-MBA32 -22	16-22	32	12.5	40/40	10
	EMC-MBA32 -25	18-25	32	12.5	40/40	10
	EMC-MBA32 -22-L	16-22	32	15	40/40	10
	EMC-MBA32 -25-L	18-25	32	15	40/40	10
M40 x 1.5	EMC-MBA40 -26	21-26	40	15	50/50	10
	EMC-MBA40 -31	24-31	40	15	50/50	10
	EMC-MBA40 -26-L	21-26	40	20	50/50	10
	EMC-MBA40 -31-L	24-31	40	20	50/50	10

EMC金属电缆接头
EMC Metal Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M50 x 1.5	EMC-MBA50 -33	25-33	50	15	59/59	5
	EMC-MBA50 -41	31-41	50	15	59/59	5
	EMC-MBA50 -33-L	25-33	50	22	59/59	5
	EMC-MBA50 -41-L	31-41	50	22	59/59	5
M63 x 1.5	EMC-MBA63 -45	35-45	63	17	69/69	1
M63 x 1.5	EMC-MBA63L-46	39-46	63	17	75/75	1
M63 x 1.5	EMC-MBA63L-51	44-51	63	17	75/75	1
PG7	EMC-PBA7 -5.5	3-5.5	12.5	8	17/17	10
	EMC-PBA7 -7.8	4.5-8	12.5	8	17/17	10
	EMC-PBA7 -5.5-L	3-5.5	12.5	15	17/17	10
	EMC-PBAG7 -7.8-L	4.5-8	12.5	15	17/17	10
PG9	EMC-PBA9 -5.5	3-5.5	15.2	8	18/18	10
	EMC-PBA9 -7.8	4.5-8	15.2	8	18/18	10
	EMC-PBA9 -5.5-L	3-5.5	15.2	15	18/18	10
	EMC-PBA9 -7.8-L	4.5-8	15.2	15	18/18	10
PG11	EMC-PBA11-7	4-7	18.6	9	22/22	10
	EMC-PBA11-10	6-10	18.6	9	22/22	10
	EMC-PBA11-7-L	4-7	18.6	15	22/22	10
	EMC-PBA11-10-L	6-10	18.6	15	22/22	10
PG13.5	EMC-PBA13.5-8.8	4-8.8	20.4	9.5	24/24	10
	EMC-PBA13.5-12.5	7-12.5	20.4	9.5	24/24	10
	EMC-PBA13.5-8.8-L	4-8.8	20.4	15	24/24	10
	EMC-PBA13.5-12.5-L	7-12.5	20.4	15	24/24	10
PG16	EMC-PBA16-11	7-11	22.5	9.5	25/25	10
	EMC-PBA16-14	9-14	22.5	9.5	25/25	10
	EMC-PBA16-11-L	7-11	22.5	15	25/25	10
	EMC-PBA16-14-L	9-14	22.5	15	25/25	10
PG21	EMC-PBA21-16	12-16	28.3	12	30/30	10
	EMC-PBA1-18	14-18	28.3	12	30/30	10
	EMC-PBA21-16-L	12-16	28.3	15	30/30	10
	EMC-PBA21-18-L	14-18	28.3	15	30/30	10
PG29	EMC-PBA29-22	16-22	37	12.5	40/40	10
	EMC-PBA29-25	18-25	37	12.5	40/40	10
	EMC-PBA29-22-L	16-22	37	15	40/40	10
	EMC-PBA29-25-L	18-25	37	15	40/40	10
PG36	EMC-PBA36-26	21-26	47	15	50/50	10
	EMC-PBA36-31	24-31	47	15	50/50	10
PG42	EMC-PBA42-33	25-33	54	15	59/59	10
	EMC-PBA42-41	31-41	54	15	59/59	10
PG48	EMC-PBA48-45	35-45	59.3	17	69/69	5
G(PF)1/4"	EMC-FBA1/4 -5.5	3-5.5	13.1	8	18/18	10
	EMC-FBA1/4 -7.8	4.5-8	13.1	8	18/18	10
G(PF)3/8"	EMC-FBA3/8-7	4-7	16.6	9	22/22	10
	EMC-FBA3/8-10	6-10	16.6	9	22/22	10
G(PF)1/2"	EMC-FBA1/2 S-8.8	4-8.8	20.9	9.5	24/24	10
	EMC-FBA1/2S-12.5	7-12.5	20.9	9.5	24/24	10
	EMC-FBA1/2-11	7-11	20.9	9.5	25/25	10
	EMC-FBA1/2-14	9-14	20.9	9.5	25/25	10

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

EMC金属电缆接头
EMC Metal Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
G(PF) 3/4″	EMC-FBA3/4-16	12-16	26.4	12	30/30	10
	EMC-FBA 3/4-18	14-18	26.4	12	30/30	10
G(PF) 1″	EMC-FBA 1-22	16-22	33.2	12.5	40/40	10
	EMC-FBA1-25	18-25	33.2	12.5	40/40	10
G(PF) 1 1/4″	EMC-FBA 1 1/4-26	21-26	41.9	15	50/50	10
	EMC-FBA 1 1/4-31	24-31	41.9	15	50/50	10
G(PF) 1 1/2 ″	EMC-FBA1 1/2-33	25-33	48	15	59/59	10
	EMC-FBA1 1/2-41	31-41	48	15	59/59	10
G(PF) 2″	EMC-FBA 2-45	35-45	60	17	69/69	5
NPT1/4″	EMC-NBA 1/4 -5.5	3-5.5	13.1	8	18	10
	EMC-NBA 1/4 -7.8	4.5-8	13.1	8	18	10
NPT3/8″	EMC-NBA 3/8-7	4-7	16.6	9	22	10
	EMC-NBA 3/8-10	6-10	16.6	9	22	10
NPT1/2″	EMC-NBA 1/2S-8.8	4-8.8	20.9	9.5	24	10
	EMC-NBA 1/2S-12.5	7-12.5	20.9	9.5	24	10
	EMC-NBA 1/2-11	7-11	20.9	9.5	25	10
	EMC-NBA 1/2-14	9-14	20.9	9.5	25	10
NPT3/4″	EMC-NBA 3/4-16	12-16	26.4	12	30	10
	EMC-NBA 3/4-18	14-18	26.4	12	30	10
NPT1″	EMC-NBA 1-22	16-22	33.2	12.5	40	10
	EMC-NBA 1-25	18-25	33.2	12.5	40	10
NPT1 1/4″	EMC-NBA 1 1/4-26	21-26	41.9	15	50	10
	EMC-NBA 1 1/4-31	24-31	41.9	15	50	10
NPT1 1/2″	EMC-NBA 1 1/2-33	25-33	48	15	59	10
	EMC-NBA 1 1/2-41	31-41	48	15	59	10
NPT2″	EMC-NBA 2-45	35-45	60	17	69	5

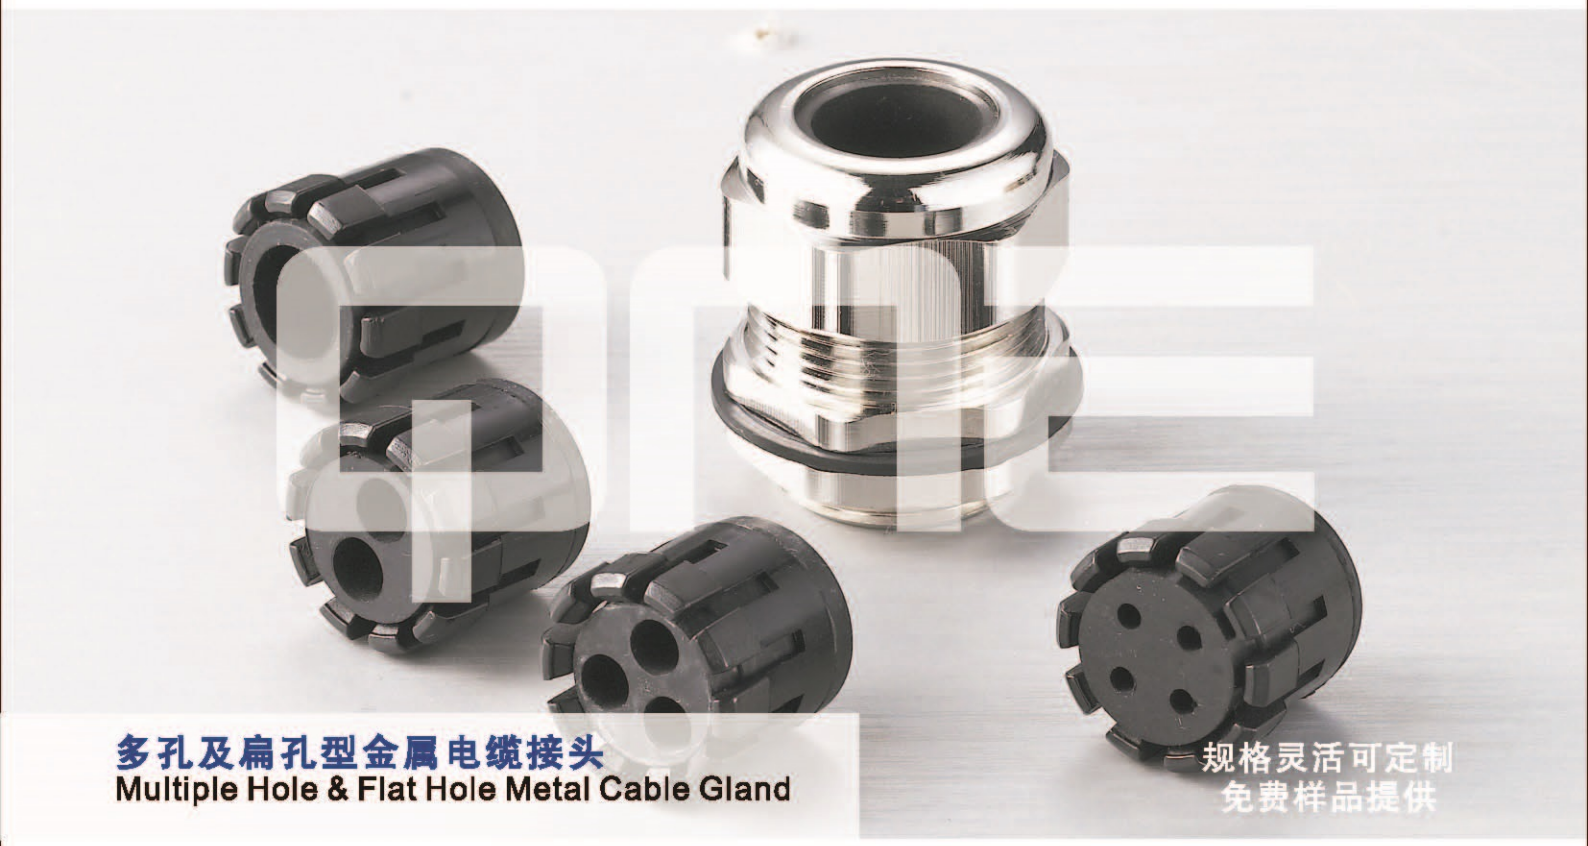

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分以黄铜镀镍制成；E部分以UL认可之尼龙PA66制成(防火等级UL94V-2)；B.D部分采用三元乙丙耐候橡胶制成。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts.
- Protection degree: IP68
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

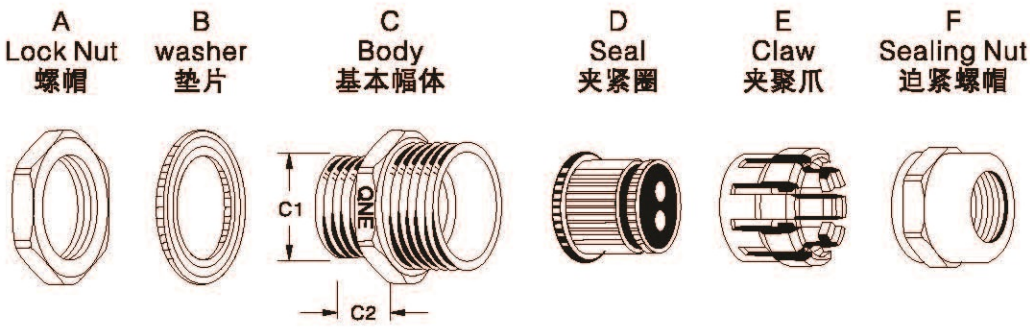

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机扳口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	M12×1.5	MBA12 -H2-03	3~1.2	12	12~12.3	8	17/17	10
	M16×1.5	MBA16 -H2-04	4~1.6	16	16~16.3	9	22/22	10
	M20×1.5	MBA20M -H2-05	5.3~1.5	20	20~20.3	9.5	24/24	10
	M20×1.5	MBA20 -H2-03	3.5~2	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -H2-06	6~2.5	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H2-05	5~2	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -H2-08	8.7~4.5	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H2-10	10~5	32	32~32.4	12.5	41/41	10
	G(PF)1/4"	FBA13 -H2-03	3~1.2	13.1	13.1~13.4	8	17/17	10
	G(PF)3/8"	FBA17 -H2-04	4~1.6	16.6	16.6~16.9	9	22/22	10
	G(PF)1/2"	FBA21 -H2-03	3.5~2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -H2-06	6~2.5	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H2-05	5~2	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -H2-08	8.7~4.5	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H2-10	10~5	33.2	33.2~33.6	12.5	41/41	10
	PG 7	PBA7 -H2-03	3~1.2	12.5	12.5~12.8	8	17/17	10
	PG 9	PBA9 -H2-03	3~1.2	15.2	15.2~15.5	8	18/17	10
	PG 11	PBA11 -H2-04	4~1.6	18.6	18.6~18.9	9	22/22	10
	PG 13.5	PBA13.5-H2-05	5.3~1.5	20.4	20.4~20.7	9.5	24/24	10
	PG 16	PBA16 -H2-03	3.5~2	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -H2-06	6~2.5	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H2-05	5~2	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -H2-08	8.7~4.5	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H2-10	10~5	37	37~37.4	12.5	41/41	10
	NPT3/8"	NBA17 -H2-04	4~1.6	17.1	-	13	22	10
	NPT1/2"	NBA21 -H2-03	3.5~2	21.3	-	13	26	10
	NPT1/2"	NBA21 -H2-06	6~2.5	21.3	-	13	26	10
	NPT3/4"	NBA26 -H2-05	5~2	26.6	-	14	32	10
	NPT3/4"	NBA26 -H2-08	8.7~4.5	26.6	-	14	32	10
	NPT1"	NBA33 -H2-10	10~5	33.5	-	15	41	10
	M12×1.5	MBA12 -H3-02	2.6~1.2	12	12~12.3	8	17/17	10
	M16×1.5	MBA16 -H3-04	4~1.6	16	16~16.3	9	22/22	10
	M20×1.5	MBA20M -H3-05	5~2	20	20~20.3	9.5	24/24	10
	M20×1.5	MBA20 -H3-03	3.5~1.5	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -H3-05	5~2	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H3-05	5~2	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -H3-08	8~4	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H3-10	10~5	32	32~32.4	12.5	41/41	10
	G(PF)1/4"	FBA13 -H3-02	2.6~1.2	13.1	13.1~13.4	8	17/17	10
	G(PF)3/8"	FBA17 -H3-04	4~1.6	16.6	16.6~16.9	9	22/22	10
	G(PF)1/1/2"	FBA21 -H3-03	3.5~1.5	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -H3-05	5~2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H3-05	5~2	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -H3-08	8~4	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H3-10	10~5	33.2	33.2~33.6	12.5	41/41	10
	PG 7	PBA7 -H3-02	2.6~1.2	12.5	12.5~12.8	8	17/17	10

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机扳口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	PG 9	PBA9 -H3-02	2.6~1.2	152	15.2~15.5	8	18/17	10
	PG 11	PBA11 -H3-04	4~1.6	18.6	18.6~18.9	9	22/22	10
	PG 13.5	PBA13.5-H3-05	5~2	20.4	20.4~20.7	9.5	24/24	10
	PG 16	PBA16 -H3-03	3.5~1.5	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -H3-05	5~2	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H3-05	5~2	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -H3-08	8~4	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H3-10	10~5	37	37~37.4	12.5	41/41	10
	NPT3/8"	NBA17 -H3-04	4~1.6	17.1	-	13	22	10
	NPT1/2"	NBA21 -H3-03	3.5~1.5	21.3	-	13	26	10
	NPT1/2"	NBA21 -H3-05	5~2	21.3	-	13	26	10
	NPT3/4"	NBA26 -H3-05	5~2	26.6	-	14	32	10
	NPT3/4"	NBA26 -H3-08	8~4	26.6	-	14	32	10
	NPT1"	NBA33 -H3-10	10~5	33.5	-	15	41	10
	M12×1.5	MBA12 -H4-02	2.3~1	12	12~12.3	8	17/17	10
	M16×1.5	MBA16 -H4-03	3-1.2	16	16~16.3	9	22/22	10
	M20×1.5	MBA20M -H4-04	4.2-1.7	20	20~20.3	9.5	24/24	10
	M20×1.5	MBA20 -H4-03	3.5-1.5	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -H4-04	4.5-2	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H4-05	5-2	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -H4-07	7-3.5	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H4-09	9-4.5	32	32~32.4	12.5	41/41	10
	G(PF)1/4"	FBA13 -H4-02	2.3-1	13.1	13.1~13.4	8	17/17	10
	G(PF)3/8"	FBA17 -H4-03	3-1.2	16.6	16.6~16.9	9	22/22	10
	G(PF)1/2"	FBA21 -H4-03	3.5-1.5	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -H4-04	4.5-2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H4-05	5-2	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -H4-07	7-3.5	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H4-09	9-4.5	33.2	33.2~33.6	12.5	41/41	10
	PG 7	PBA7 -H4-02	2.3-1	12.5	12.5~12.8	8	17/17	10
	PG 9	PBA9 -H4-02	2.3-1	15.2	15.2~15.5	8	18/17	10
	PG 11	PBA11 -H4-03	3-1.2	18.6	18.6~18.9	9	22/22	10
	PG 13.5	PBA13.5-H4-04	4.2-1.7	20.4	20.4~20.7	9.5	24/24	10
	PG 16	PBA16 -H4-03	3.5-1.5	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -H4-04	4.5-2	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H4-05	5-2	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -H4-07	7-3.5	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H4-09	9-4.5	37	37~37.4	12.5	41/41	10
	NPT3/8"	NBA17 -H4-03	3-1.2	17.1	-	13	22	10
	NPT1/2"	NBA21 -H4-03	3.5-1.5	21.3	-	13	26	10
	NPT1/2"	NBA21 -H4-04	4.5-2	21.3	-	13	26	10
	NPT3/4"	NBA26 -H4-05	5-2	26.6	-	14	32	10
	NPT3/4"	NBA26 -H4-07	7-3.5	26.6	-	14	32	10
	NPT1"	NBA33 -H4-09	9-4.5	33.5	-	15	41	10

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机扳口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	M16×1.5	MBA16 -H5-02	2.5-1	16	16~16.3	9	22/22	10
	M20×1.5	MBA20 -H5-03	3-1.2	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -H5-04	4.2-1.7	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H5-03	3.5-1.5	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -H5-06	6-3	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H5-08	8-4	32	32~32.4	12.5	41/41	10
	G(PF)3/8"	FBA17 -H5-02	2.5-1	16.6	16.6~16.9	9	22/22	10
	G(PF)1/2"	FBA21 -H5-03	3-1.2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -H5-04	4.2-1.7	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H5-03	3.5-1.5	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -H5-06	6-3	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H5-08	8-4	33.2	33.2~33.6	12.5	41/41	10
	PG 11	PBA11 -H5-02	2.5-1	18.6	18.6~18.9	9	22/22	10
	PG 16	PBA16 -H5-03	3-1.2	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -H5-04	4.2-1.7	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H5-03	3.5-1.5	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -H5-06	6-3	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H5-08	8-4	37	37~37.4	12.5	41/41	10
	NPT3/8"	NBA17 -H5-02	2.5-1	17.1	-	13	22	10
	NPT1/2"	NBA21 -H5-03	3-1.2	21.3	-	13	26	10
	NPT1/2"	NBA21 -H5-04	4.2-1.7	21.3	-	13	26	10
	NPT3/4"	NBA26 -H5-03	3.5-1.5	26.6	-	14	32	10
	NPT3/4"	NBA26 -H5-06	6-3	26.6	-	14	32	10
	NPT1"	NBA33 -H5-08	8-4	33.5	-	15	41	10
	M16×1.5	MBA16 -H6-02	2-1	16	16~16.3	9	22/22	10
	M20×1.5	MBA20 -H6-03	3-1.2	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H6-03	3.5-1.5	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -H6-05	5.3-2.4	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H6-07	7-3.5	32	32~32.4	12.5	41/41	10
	G(PF)3/8"	FBA17 -H6-02	2-1	16.6	16.6~16.9	9	22/22	10
	G(PF)1/2"	FBA21 -H6-03	3-1.2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H6-03	3.5-1.5	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -H6-05	5.3-2.4	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H6-07	7-3.5	33.2	33.2~33.6	12.5	41/41	10
	PG 11	PBA11 -H6-02	2-1	18.6	18.6~18.9	9	22/22	10
	PG 16	PBA16 -H6-03	3-1.2	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H6-03	3.5-1.5	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -H6-05	5.3-2.4	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H6-07	7-3.5	37	37~37.4	12.5	41/41	10
	NPT3/8"	NBA17 -H6-02	2-1	17.1	-	13	22	10
	NPT1/2"	NBA21 -H6-03	3-1.2	21.3	-	13	26	10
	NPT3/4"	NBA26 -H6-03	3.5-1.5	26.6	-	14	32	10
	NPT3/4"	NBA26 -H6-05	5.3-2.4	26.6	-	14	32	10
	NPT1"	NBA33 -H6-07	7-3.5	33.5	-	15	41	10

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机扳口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	M20×1.5	MBA20 -H7-03	3-1.2	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H7-03	3.5-1.5	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -H7-06	6-3	32	32~32.4	12.5	41/41	10
	G(PF)1/2"	FBA21 -H7-03	3-1.2	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H7-03	3.5-1.5	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -H7-06	6-3	33.2	33.2~33.6	12.5	41/41	10
	PG 16	PBA16 -H7-03	3-1.2	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H7-03	3.5-1.5	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -H7-06	6-3	37	37~37.4	12.5	41/41	10
	NPT1/2"	NBA21 -H7-03	3-1.2	21.3	-	13	26	10
	NPT3/4"	NBA26 -H7-03	3.5-1.5	26.6	-	14	32	10
	NPT1"	NBA33 -H7-06	6-3	33.5	-	15	41	10
	M20×1.5	MBA20 -H8-02	2.8-1	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -H8-03	3.5-1.5	25	25~25.4	12	32/32	10
	G(PF)1/2"	FBA21 -H8-02	2.8-1	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -H8-03	3.5-1.5	26.4	26.4~26.8	12	32/32	10
	PG 16	PBA16 -H8-02	2.8-1	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -H8-03	3.5-1.5	28.3	28.3~28.7	12	32/32	10
	NPT1/2"	NBA21 -H8-02	2.8-1	21.3	-	13	26	10
	NPT3/4"	NBA26 -H8-03	3.5-1.5	26.6	-	14	32	10
	M16×1.5	MBA16 -0610	6×10	16	16~16.3	9	22/22	10
	M20×1.5	MBA20M -0511	5×11.5	20	20~20.3	9.5	24/24	10
	M20×1.5	MBA20 -0612	6.5×1.	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -0614	6×14	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -0712	7×12	20	20~20.3	9.5	26/26	10
	M20×1.5	MBA20 -0714	7×14	20	20~20.3	9.5	26/26	10
	M25×1.5	MBA25 -0614	6×14	25	25~25.4	12	32/32	10
	M25×1.5	MBA25 -0714	7×14	25	25~25.4	12	32/32	10
	M32×1.5	MBA32 -0822	8×22	32	32~32.4	12.5	41/41	10
	M40×1.5	MBA40 -1028	10×28.5	40	40~40.4	15	50/50	5
	M40×1.5	MBA40 -0529	5.5×29	40	40~40.4	15	50/50	5
	G(PF)3/8"	FBA17 -0610	6×10	16.6	16.6~16.9	9	22/22	10
	G(PF)1/2"	FBA21 -0612	6.5×12	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -0614	6×14	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -0712	7×12	20.9	20.9~21.2	9.5	26/26	10
	G(PF)1/2"	FBA21 -0714	7×14	20.9	20.9~21.2	9.5	26/26	10
	G(PF)3/4"	FBA26 -0614	6×14	26.4	26.4~26.8	12	32/32	10
	G(PF)3/4"	FBA26 -0714	7×14	26.4	26.4~26.8	12	32/32	10
	G(PF)1"	FBA33 -0822	8×22	33.2	33.2~33.6	12.5	41/41	10
	G(PF)1 1/4"	FBA42 -1028	10×28.5	41.9	41.9~42.3	15	50/50	5
	G(PF)1 1/4"	FBA42 -0529	5.5×29	41.9	41.9~42.3	15	50/50	5
	PG 11	PBA11 -0610	6×10	18.6	18.6~18.9	9	22/22	10
	PG 13.5	PBA13.5-0511	5×11.5	20.4	20.4~20.7	9.5	24/24	10
	PG 16	PBA16 -0612	6.5×12	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -0614	6×14	22.5	22.5~22.8	9.5	26/26	10
	PG 16	PBA16 -0712	7×12	22.5	22.5~22.8	9.5	26/26	10

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

多孔及扁孔型金属电缆接头
Multiple Hole & Flat Hole Metal Cable Gland

规格灵活可定制
免费样品提供

夹紧圈形状 Seal Holes	螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	机板口径 Panel Mounting Hole(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
	PG 16	PBA16 -0714	7×14	22.5	22.5~22.8	9.5	26/26	10
	PG 21	PBA21 -0614	6×14	28.3	28.3~28.7	12	32/32	10
	PG 21	PBA21 -0714	7×14	28.3	28.3~28.7	12	32/32	10
	PG 29	PBA29 -0822	8×22	37	37~37.4	12.5	41/41	10
	PG 36	PBA36 -1028	10×28.5	47	47~47.4	15	50/50	5
	PG 36	PBA36 -0529	5.5×29	47	47~47.4	15	50/50	5
	NPT3/8"	NBA17 -0610	6×10	17.1	-	13	22	10
	NPT1/2"	NBA21 -0612	6.5×15	21.3	-	13	26	10
	NPT1/2"	NBA21 -0614	6×14	21.3	-	13	26	10
	NPT1/2"	NBA21 -0712	7×12	21.3	-	13	26	10
	NPT1/2"	NBA21 -0714	7×14	21.3	-	13	26	10
	NPT3/4"	NBA26 -0614	6×14	26.6	-	14	32	
	NPT3/4"	NBA26 -0714	7×14	26.6	-	14	32	10
	NPT1"	NBA33 -0822	8×22	33.5	-	15	41	10
	NPT1 1/4"	NBA42 -1028	10×28.5	42.2	-	15	50	5
	NPT1 1/4"	NBA42 -0529	5.5×29	42.2	-	15	50	5

不锈钢电缆接头
Stainless Steel Cable Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G（PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分以不锈钢制成(304/316)；E部分以UL认可之尼龙PA66制成(防火等级UL94V-2)；B.D部分采用三元乙丙耐候橡胶制成。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Stainless Steel for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts.
- Protection degree: IP68
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

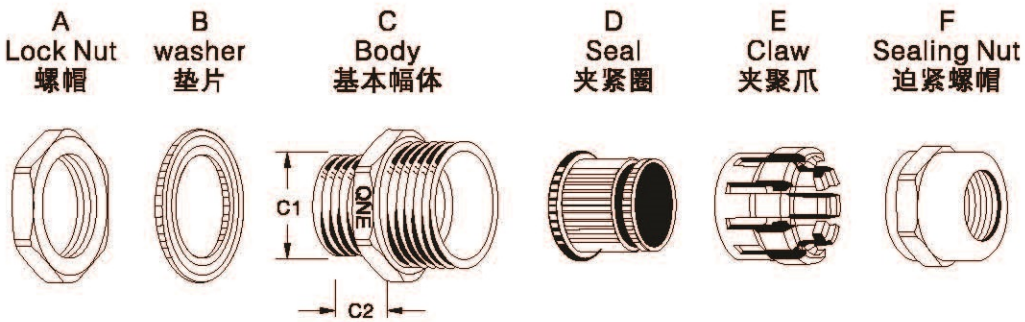

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically)

不锈钢电缆接头
Stainless Steel Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
M6 x 1	SSCG-M6 -3	1.5-3	6	6	9/9	20
M8 x 1.25	SSCG-M8 -3.8	2-3.8	8	6	12/12	20
M10 x 1.5	SSCG-M10 -5.5	2-6.5	10	6.5	14/14	20
M12 x 1.5	SSCG-M12S-5.5	2-6.5	12	7	14/14	20
	SSCG-M12 -5.5	3-5.5	12	8	17/17	10
	SSCG-M12 -7.8	4.5-8	12	8	17/17	10
M16 x 1.5	SSCG-M16S-5.5	3-5.5	16	9	18/18	10
	SSCG-M16S-7.8	4.5-8	16	9	18/18	10
	SSCG-M16 -7	4-7	16	9	22/22	10
	SSCG-M16 -10	6-10	16	9	22/22	10
M20 x 1.5	SSCG-M20S-8.8	4-8.8	20	9.5	24/24	10
	SSCG-M20S-12.5	7-12.5	20	9.5	24/24	10
	SSCG-M20 -11	7-11	20	9.5	26/26	10
	SSCG-M20 -14	9-14	20	9.5	26/26	10
M25 x 1.5	SSCG-M25S-11	7-11	25	12	26/26	10
	SSCG-M25S-14	9-14	25	12	26/26	10
	SSCG-M25 -16	12-16	25	12	32/32	10
	SSCG-M25 -18	14-18	25	12	32/32	10
M32 x 1.5	SSCG-M32 -22	16-22	32	12.5	40/40	10
	SSCG-M32 -25	18-25	32	12.5	40/40	10
M40 x 1.5	SSCG-M40 -26	21-26	40	15	50/50	10
	SSCG-M40 -31	24-31	40	15	50/50	10
M50 x 1.5	SSCG-M50 -33	25-33	50	15	60/60	10
	SSCG-M50 -41	31-41	50	15	60/60	10
M63 x 1.5	SSCG-M63 -45	35-45	63	17	70/70	5
PG7	SSCG-PG7S-5.5	2-6.5	12.5	7	14/14	20
	SSCG-PG7 -5.5	3-5.5	12.5	8	17/17	10
	SSCG-PG7 -7.8	4.5-8	12.5	8	17/17	10
PG9	SSCG-PG9 -5.5	3-5.5	15.2	8	18/18	10
	SSCG-PG9 -7.8	4.5-8	15.2	8	18/18	10
PG11	SSCG-PG11-7	4-7	18.6	9	22/22	10
	SSCG-PG11-10	6-10	18.6	9	22/22	10
PG13.5	SSCG-PG13.5-8.8	4-8.8	20.4	9.5	24/24	10
	SSCG-PG13.5-12.5	7-12.5	20.4	9.5	24/24	10
PG16	SSCG-PG16-11	7-11	22.5	9.5	26/26	10
	SSCG-PG16-14	9-14	22.5	9.5	26/26	10
PG21	SSCG-PG21-16	12-16	28.3	12	32/32	10
	SSCG-PG21-18	14-18	28.3	12	32/32	10
PG29	SSCG-PG29-22	16-22	37	12.5	40/40	10
	SSCG-PG29-25	18-25	37	12.5	40/40	10
PG36	SSCG-PG36-26	21-26	47	15	50/50	10
	SSCG-PG36-31	24-31	47	15	50/50	10
PG42	SSCG-PG42-33	25-33	54	15	60/60	10
	SSCG-PG42-41	31-41	54	15	60/60	10
PG48	SSCG-PG48-45	35-45	59.3	17	70/70	5

金属变径环
Metal Reducer/Enlarger

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：以黄铜镀镍制成
- 产品特性：此产品可将不同的螺纹外径尺寸进行自由转换；可根据客户要求定制，生产不同螺纹长度及其他不同螺纹之间的转换。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated
- Features: To allow switching between different thread outside diameter. For example, from large metric external thread to small metric using. We also can make as your request for this product.

Note: Special size and type, please contact us

公制 Metric　PG　G(PF)　NPT



螺牙规格 Thread		编号 Item.No.	螺纹长度 Thread Length C2(mm)	总长度 Total length (mm)	扳手径 Spanner Size A&F(mm)	包装 Std.Pkg (pcs)
外螺纹 External thread C3	内螺纹 Internal thread C1					
M16×1.5	M12×1.5	M1612	6.0	8.5	18	10
M20×1.5	M16×1.5	M2016	6.5	9.0	22	10
M25×1.5	M20×1.5	M2520	7.0	10.0	30	10
M32×1.5	M25×1.5	M3225	8.0	11.5	40	10
M40×1.5	M32×1.5	M4032	9.0	12.5	50	10
M50×1.5	M40×1.5	M5040	10.0	14.0	59	10
M63×1.5	M50×1.5	M6350	10.0	14.0	67	10

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

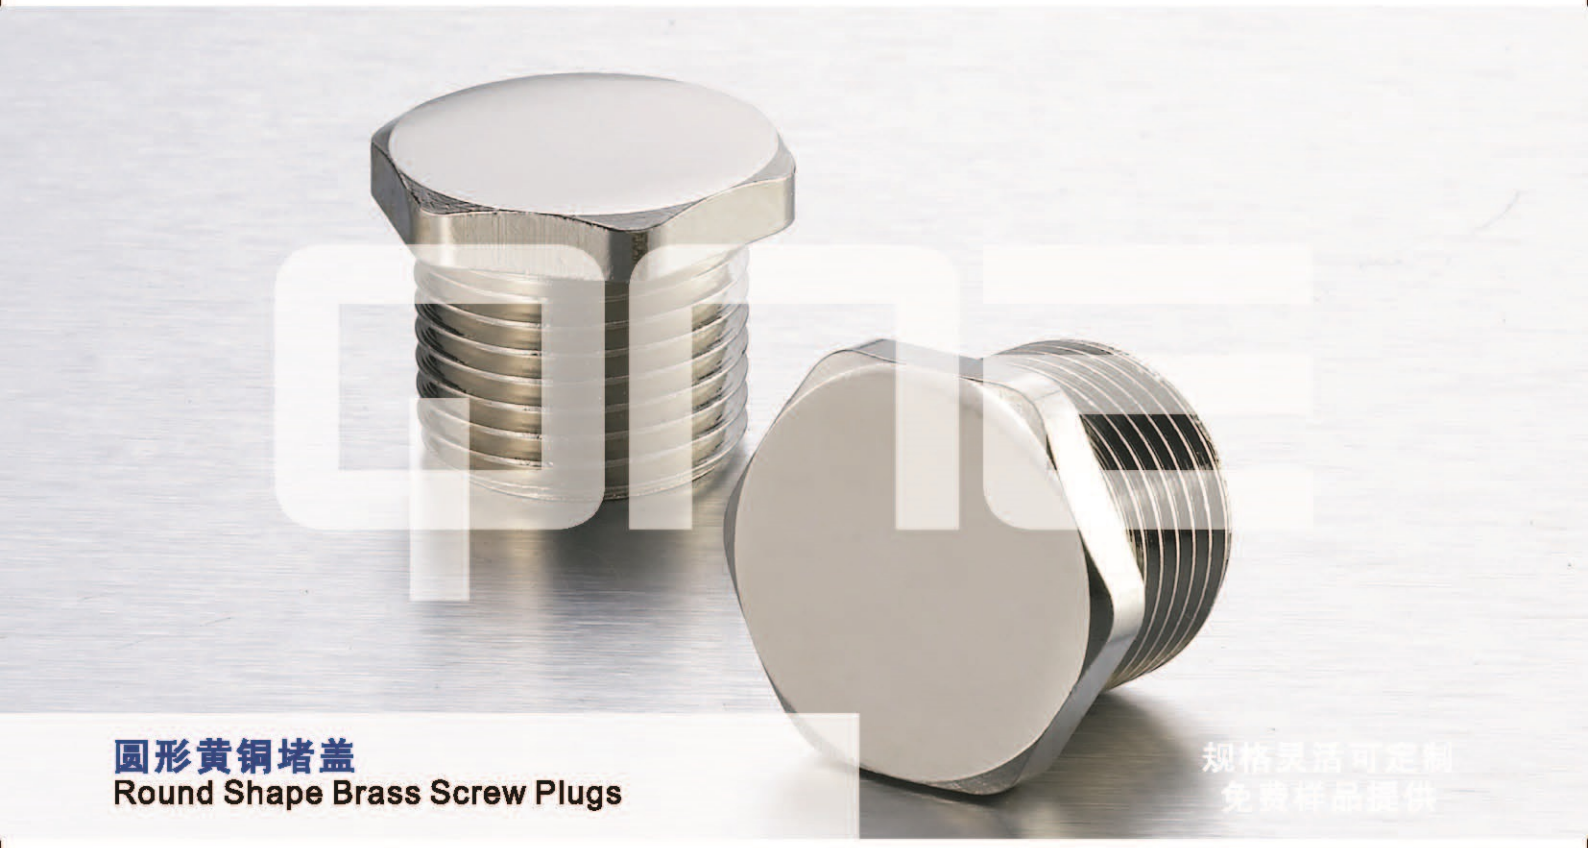

圆形黄铜堵盖
Round Shape Brass Screw Plugs

规格灵活可定制
免费样品提供

型号	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	闷盖外径 D(mm)
PG7	12.5	5	14
PG9	15.2	6	17
PG11	18.6	6	20
PG13.5	20.4	6.5	22
PG16	22.5	6.5	24
PG21	28.3	7	30
PG29	37	8	39
PG36	47	9	50
PG42	54	10	57
PG48	59.3	10	64
M12	12	5	14
M16	16	6	17
M18	18	6	20
M20	20	6.5	22
M22	22	6.5	24
M25	25	6.5	27
M32	32	7	35
M40	40	8	43
M50	50	9	55
M63	63	10	66

- 产品材质:黄铜镀镍,三元乙丙橡胶
- 保护等级:IP54, IP68
- 工作温度:-40℃至100℃

注:特殊规格需要请联系工厂

- Material: Brass with nickel plated, EPDM Rubber
- Protection degree: IP54, IP68
- Working temperature: -40℃ to 100℃

Note: Special size and type, please contact us

公制 Metric

PG

G(PF)

NPT

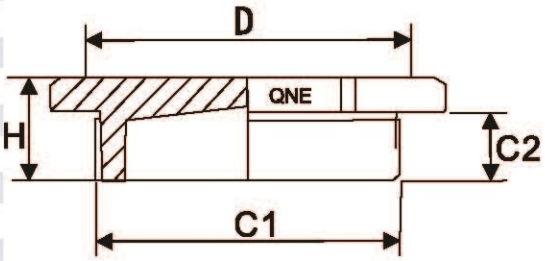

圆形黄铜堵盖
Round Shape Brass Screw Plugs

规格灵活可定制
免费样品提供

型号	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	闷盖外径 D (mm)
PG7	12.5	5	14
PG9	15.2	6	17
PG11	18.6	6	20
PG13.5	20.4	6.5	22
PG16	22.5	6.5	24
PG21	28.3	7	30
PG29	37	8	39
PG36	47	9	50
PG42	54	10	57
PG48	59.3	10	64
M12	12	5	14
M16	16	6	17
M18	18	6	20
M20	20	6.5	22
M22	22	6.5	24
M25	25	6.5	27
M32	32	7	35
M40	40	8	43
M50	50	9	55
M63	63	10	66

- 产品材质:黄铜镀镍,三元乙丙橡胶
- 保护等级:IP54, IP68
- 工作温度:-40℃至100℃

注：特殊规格需要请联系工厂

- Material: Brass with nickel plated, EPDMRubber
- Protection degree: IP54, IP68
- Working temperature: -40℃ to 100℃

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT





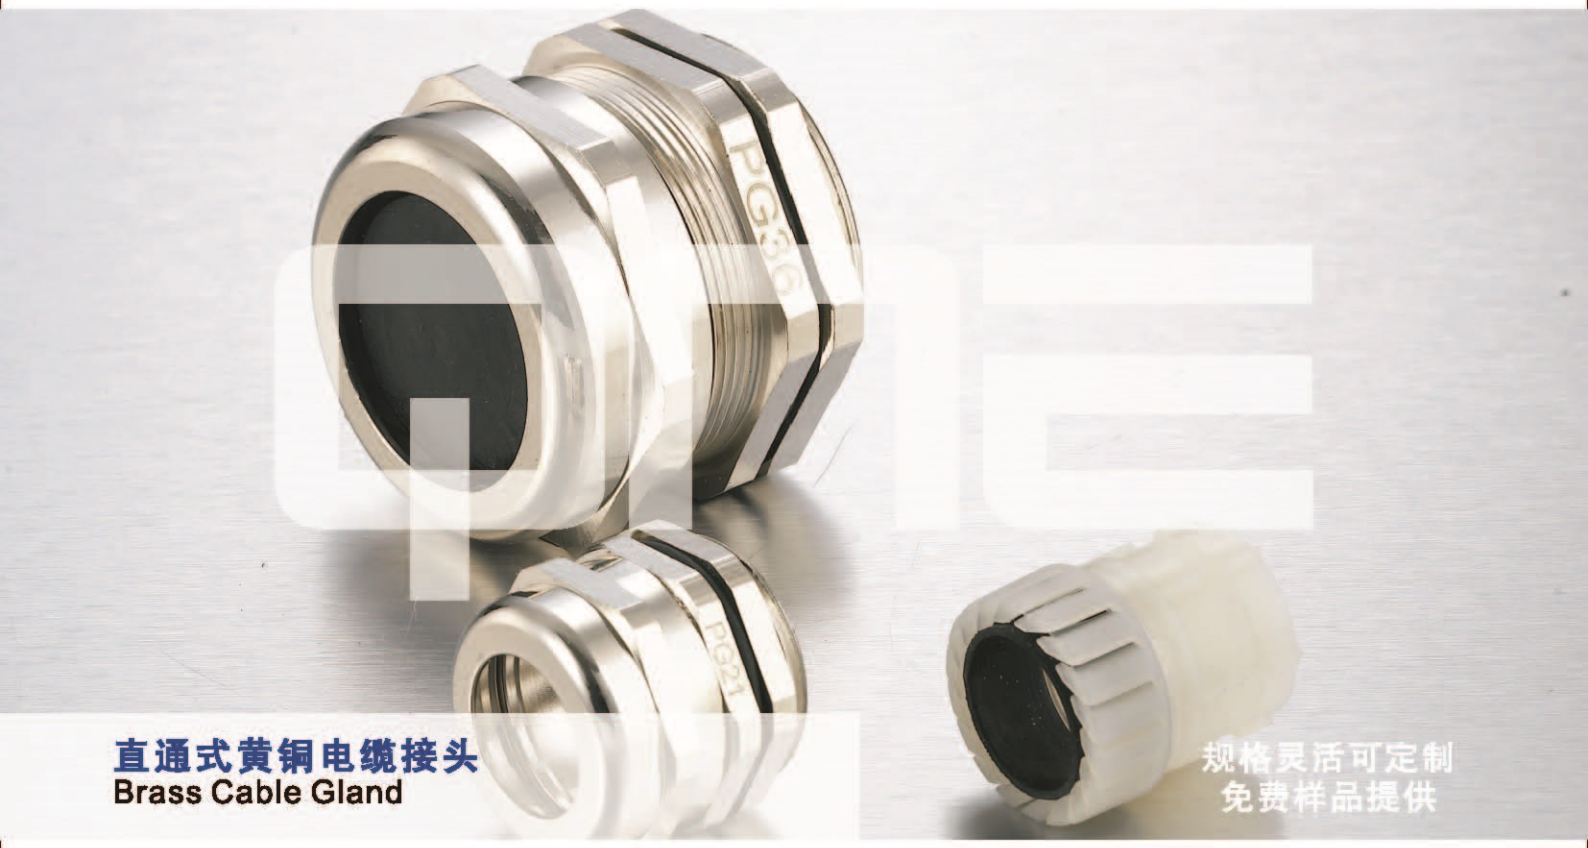

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分以黄铜镀镍制成；E部分以UL认可之尼龙PA66制成(防火等级UL94V-2)；B.D部分采用三元乙丙耐候橡胶制成。
- 保护等级：IP68
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts.
- Protection degree: IP68
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

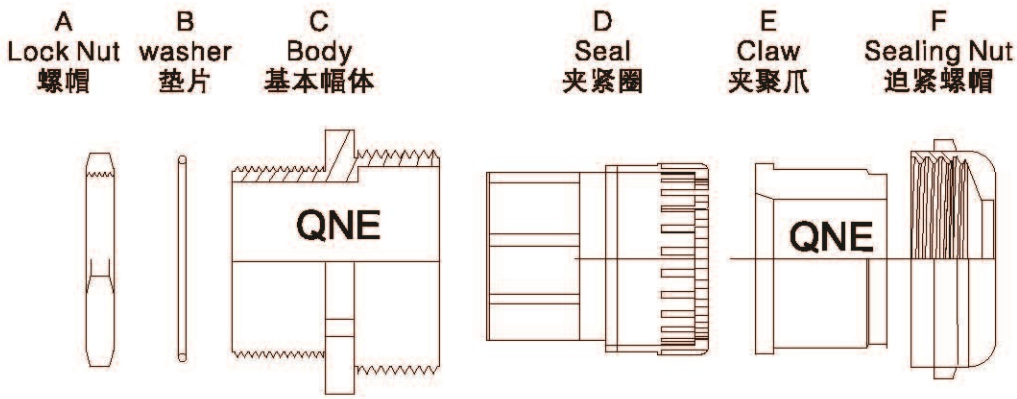

直通式黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	结合长度 JointLength H (mm)	扳手径 Spanner Size A&F(mm)
M12x1.5(1)	3-6.5	12	7	19	14
M14x1.5	4-8	14	7	19	17
M16x1.5	4-8	16	8	20	18
M18x1.5	5-10	18	8	21	20
M20x1.5	6-12	20	8	22	22
M22x1.5	10-14	22	8	23	24
M24x1.5	10-14	24	9	25	24/27
M25x1.5	10-14	25	9	25	24/27
M25x1.5	13-18	25	9	27	30/27
M27x1.5(2)	13-18	27	9	27	30
M28x1.5(2)	13-18	28	9	27	30
M30x1.5(2)	13-18	30	9	29	30/32
M32x1.5(2)	15-22	32	10	29	35
M33x1.5(2)	15-22	33	10	29	35
M36x1.5(2)	18-25	36	10	31	40
M37x1.5(2)	18-25	37	10	31	40
M40x1.5(2)	18-25	40	11	31	40/45
M40x1.5(2)	22-30	40	11	35	45
M42x1.5(2)	22-30	42	11	35	45
M47x1.5(2)	25-33	47	11	37	50
M48x1.5(2)	25-33	48	11	37	50/52
M50x1.5(2)	32-38	50	12	37	50/55
M54x1.5(2)	32-38	54	12	38	57
M56x1.5(2)	32-38	56	12	38	57/59
M60x1.5(2)	37-44	60	13	38	64
M63x1.5(2)	37-44	63	13	38	64/68
M64x1.5(2)	37-44	64	13	38	64/68
M72x2	42-52	72	15	42	77
M75x2	42-52	75	15	42	77
M80x2	55-62	80	15	45	88
M88x2	65-70	88	15	45	94
M100x2	78-84	100	15	45	110
PG7	3-6.5	12.5	7	19	14
PG9	4-8	15.2	8	20	17
PG11	5-10	18.6	8	21	20/21
PG13.5	6-12	20.4	8	22	22
PG16	10-14	22.5	9	23	24
PG19	10-14	25	9	25	24/27
PG21	13-18	28.3	9	27	30
PG25	15-22	32	10	29	35
PG29	18-25	37	11	31	40
PG36	25-33	47	12	37	50
PG42	32-38	54	13	38	57
PG48	37-44	59.3	14	38	64
PG63	42-52	72	15	42	77
G(PF)1/4"	3-6.5	13.1	7	19	14
G(PF)3/8"	4-8	16.6	8	19	18
G(PF)1/2"	6-12	20.9	8	22	22

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

直通式黄铜电缆接头
Brass Cable Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	结合长度 JointLength H (mm)	扳手径 Spanner Size A&F(mm)
G(PF)3/4"	13-18	26.4	9	25	30
G(PF)1"	18-25	33.2	11	29	40
G(PF)1 1/4"	25-33	41.9	13	35	50
G(PF)1 1/2"	32-38	48	14	37	57
G(PF)2"	37-44	59.6	14	38	64
G(PF)2 1/2"	42-52	75.1	15	38	77
G(PF)3"	65-70	87.8	15	48	94
NPT1/4"	3-6.5	13.1	7	19	14
NPT3/8"	4-8	16.6	8	19	18
NPT1/2"	6-12	20.9	8	22	22
NPT3/4"	13-18	26.5	9	25	30
NPT1"	18-25	33.2	11	29	40
NPT1 1/4"	25-33	41.9	13	35	50
NPT1 1/2"	32-38	48	14	37	57
NPT2"	37-44	60	14	38	64
NPT2 1/2"	42-52	72.6	15	38	77
NPT3"	65-70	88.6	15	45	94

船用填料函
Marine Stuffing Box Joint

规格灵活可定制
免费样品提供

- 材质：黄铜镀镍,三元乙丙橡胶
- 防水等级：IP54
- 工作温度：-40℃至100℃
- 用途：船用填料函广泛应用于造船工业，起到保护电缆的作用

注：特殊规格需要请联系工厂

- Materials: Brass with nickel plated, EPDM Rubber
- Protection Level: IP54
- Working Temperature: -40℃ to 100℃
- Application: Stuffing Box joint is especially for the use of ship to protect the cable

Note: Special size and type, please contact us

公制
Metric

PG

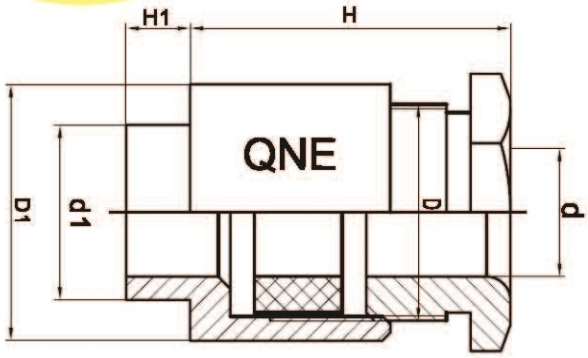

d	D	d1	D1	H	H1	垫圈 Washer	配电缆外径 Cable Range
8	M16×1	M14×1	20	-32	10	8×14	5--7
13	M20×1	M18×1	25	-35	11	13×18	6--12
16	M22×1	M22×1	32	-40	11	16×24	11--15
19	M27×1.5	M27×1.5	36	-42	14	19×27	14--18
24	M30×1.5	M30×1.5	42	-44	14	24×33	17--23
28	M36×2	M36×2	48	-46	14	28×38	22-27
34	M42×2	M42×2	54	-49	14	34×44	26--33
42	M52×2	M52×2	62	-54	14	42×52	32--41
50	M58×2	M58×2	70	-56	20	50×59	40--49
58	M68×3	M68×2	78	-56	20	58×67	48--57

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

日式船用填料函JT
(Japan Type)Marine Stuffing Box Joint

规格灵活可定制
免费样品提供

- 材质：黄铜镀镍,三元乙丙橡胶
- 防水等级：IP54
- 工作温度：-40℃至100℃
- 用途：船用填料函广泛应用于造船工业，起到保护电缆的作用

注：特殊规格需要请联系工厂

- Materials: Brass with nickel plated, EPDM Rubber
- Protection Level: IP54
- Working Temperature: -40℃ to 100℃
- Application: Stuffing Box joint is especially for the use of ship to protect the cable

Note: Special size and type, please contact us

公制
Metric

PG

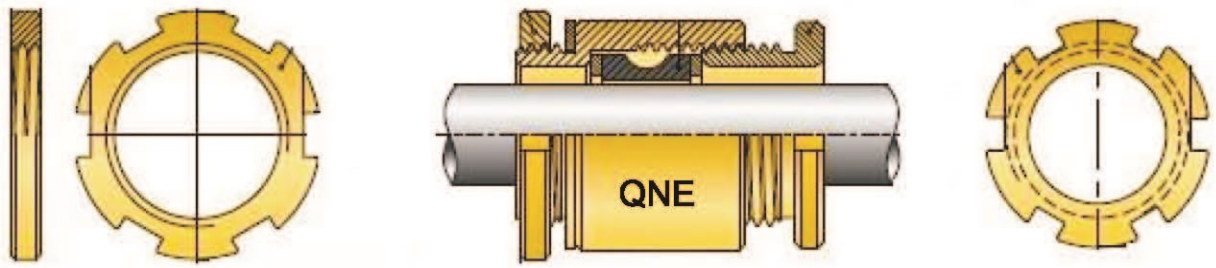

日式船用填料函JT
(Japan Type)Marine Stuffing Box Joint

规格灵活可定制
免费样品提供

产品编号 Item No	规格 Size	螺纹规格 Thread	夹紧件类型 Clamping type	穿线范围 Cable Range(mm)	螺纹长 Thread Length (mm)	机板口径 Board Diameter (mm)
QNE-JT3/8A	JT-10	3/8″	A	6-7	11	18
QNE-JT3/8B	JT-10	3/8″	B	7-8	11	18
QNE-JT1/2A	JT-15	1/2″	A	8-9	11	22
QNE-JT1/2B	JT-15	1/2″	B	9-10	11	22
QNE-JT1/2C	JT-15	1/2″	C	9-11	11	22
QNE-JT3/4A	JT-20	3/4″	A	11-12	11	27
QNE-JT3/4B	JT-20	3/4″	B	12-13	11	27
QNE-JT3/4C	JT-20	3/4″	C	12-15	11	27
QNE-JT1A	JT-25	1″	A	15-16	11	34
QNE-JT1B	JT-25	1″	B	16-18	11	34
QNE-JT1C	JT-25	1″	C	16-20	11	34
QNE-JT1-1/4A	JT-30	1-1/4″	A	20-22	12	43
QNE-JT1-1/4B	JT-30	1-1/4″	B	22-24	12	43
QNE-JT1-1/4C	JT-30	1-1/4″	C	22-26	12	43
QNE-JT1-1/2Aa	JT-35	1-1/2″	A	26-28	12	49
QNE-JT1-1/2Ba	JT-35	1-1/2″	B	28-30	12	49
QNE-JT1-1/2Ca	JT-35	1-1/2″	C	26-30	12	49
QNE-JT1-1/2Ab	JT-40	1-1/2″	A	30-32	12	49
QNE-JT1-1/2Bb	JT-40	1-1/2″	B	32-34	12	49
QNE-JT1-1/2Cb	JT-40	1-1/2″	C	30-34	12	49
QNE-JT2Aa	JT-45	2″	A	34-36	12	61
QNE-JT2Ba	JT-45	2″	B	36-38	12	61
QNE-JT2Ca	JT-45	2″	C	36-40	12	61
QNE-JT2Ab	JT-50	2″	A	40-42	12	61
QNE-JT2Bb	JT-50	2″	B	42-44	12	61
QNE-JT2Cb	JT-50	2″	C	40-44	12	61
QNE-JT2-1/2Aa	JT-55	2-1/2″	A	44-46	12	76
QNE-JT2-1/2Ba	JT-55	2-1/2″	B	46-48	12	76
QNE-JT2-1/2Ca	JT-55	2-1/2″	C	46-50	12	76
QNE-JT2-1/2Ab	JT-60	2-1/2″	A	50-52	12	76
QNE-JT2-1/2Bb	JT-60	2-1/2″	B	52-54	12	76
QNE-JT2-1/2Cb	JT-60	2-1/2″	C	52-56	12	76
QNE-JT3Aa	JT-65	3″	A	56-58	14	89
QNE-JT3Ba	JT-65	3″	B	58-60	14	89
QNE-JT3Ab	JT-70	3″	A	60-62	14	89
QNE-JT3Bb	JT-70	3″	B	62-64	14	89
QNE-JT3Ac	JT-75	3″	A	64-66	14	89
QNE-JT3Bc	JT-75	3″	B	66-70	14	89

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

金属电缆浪管接头
Metal Flexible Conduit Gland

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F.H部分以黄铜镀镍制成；E部分以UL认可之尼龙PA66制成(防火等级UL94V-2)；B.D.G部分采用三元乙丙耐候橡胶制成。
- 保护等级：IP68-10
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃。（可定制-60℃至220℃）
- 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力特强，可防水、防尘、抗盐、耐弱酸、酒精、油 、油脂及一般溶剂。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for A. C. F.H parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D.G parts.
- Protection degree: IP68
- Working temperature: -40℃ to 100℃ in static state ,or instantaneous heat resistance up to 120℃;
- Features: The claws and seals of excellent design, sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

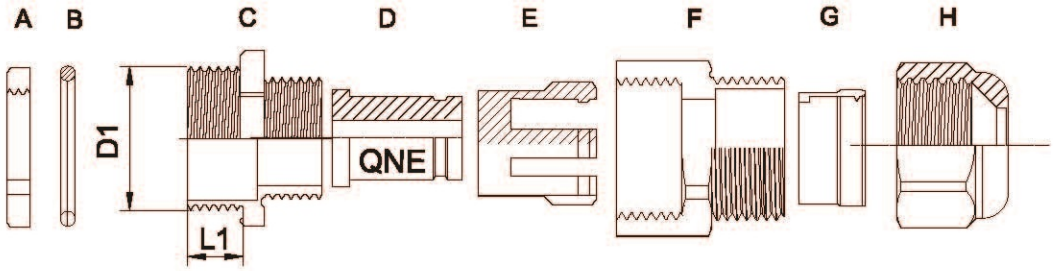

金属电缆浪管接头
Metal Flexible Conduit Gland

规格灵活可定制
免费样品提供

螺牙规格 Thread	编号 Item.No.	电缆范围 Cable Range (mm)	适配软管 Accommodated Pipes	螺纹外径 Thread O.D. D1 (mm)	螺纹长度 Thread Length L1 (mm)	扳手径 Spanner Size	包装 Std.Pkg (pcs)
M12*1.5	M12-AD10.0	3-6	AD10.0	12	6	16	100
M14*1.5	M14-AD10.0	3-6	AD10.0	14	6	16	100
M16*1.5	M16-AD13.0	4-8	AD13.0	16	7	18	100
M18*1.5	M18-AD15.8	6-10	AD15.8	18	8	20	100
M20*1.5	M20-AD15.8	8-12	AD15.8	20	8	22	100
M20*1.5	M20-AD18.5	8-12	AD18.5	20	8	22	100
M20*1.5	M20-AD21.2	8-12	AD21.2	20	8	22	100
M22*1.5	M22-AD21.2	10-14	AD21.2	22	9	24	100
M24*1.5	M24-AD21.2	10-14	AD21.2	24	10	27	100
M25*1.5	M25-AD21.2	10-14	AD21.2	25	10	28	100
M25*1.5	M25-AD28.5	10-14	AD28.5	25	10	28	100
M27*1.5	M27-AD28.5	13-18	AD28.5	27	11	30	100
M30*1.5	M30-AD34.5	13-18	AD34.5	30	11	32	50
M32*1.5	M32-AD34.5	15-22	AD34.5	32	11	36	50
M33*1.5	M33-AD34.5	15-22	AD34.5	33	11	36	50
M36*1.5	M36-AD34.5	18-25	AD34.5	36	11	42	50
M40*1.5	M40-AD42.5	18-25	AD42.5	40	12	45	50
M50*1.5	M50-AD54.5	26-32	AD54.5	50	13	56	20
M63*1.5	M63-AD54.5	37-44	AD54.5	63	14	70	20
PG7	PG7-AD10.0	3-6	AD10.0	12.5	6	16	100
PG9	PG9-AD13.0	4-8	AD13.0	15.2	7	16	100
PG11	PG11-AD15.8	6-10	AD15.8	18.6	8	20	100
PG13.5	PG13.5-AD15.8	8-12	AD15.8	20.4	8	22	100
PG13.5	PG13.5-AD21.2	8-12	AD21.2	20.4	8	22	100
PG13.5	PG13.5-AD21.2	8-12	AD21.2	20.4	8	22	100
PG16	PG16-AD21.2	10-14	AD21.2	22.5	9	24	100
PG21	PG21-AD28.5	13-18	AD28.5	28.3	11	30	100
PG29	PG29-AD34.5	18-25	AD34.5	37	11	42	50
PG36	PG36-AD42.5	26-32	AD42.5	47	13	52	50
PG48	PG48-AD54.5	37-44	AD54.5	59.3	14	64	50
G(PF)1/4"	G 1/4-AD10.0	3-6	AD10.0	13.2	6	16	100
G(PF)3/8"	G 3/8-AD13.0	4-8	AD13.0	26.5	7	18	100
G(PF)1/2"	G 1/2-AD15.8	8-12	AD15.8	21.3	8	22	100
G(PF)1/2"	G 1/2-AD21.2	8-12	AD21.2	21.3	8	22	100
G(PF)1/2"	G 1/2-AD21.2	8-12	AD21.2	21.3	8	22	100
G(PF)3/4"	G 3/4-AD28.5	13-18	D28.5	26.6	11	30	100
G(PF)1"	G 1-AD28.5	15-22	AD28.5	33.4	11	36	50
G(PF)1 1/4"	G 1-1/4-AD34.5	22-28	AD34.5	42.1	12	48	50
G(PF)1 1/2"	G 1-1/2-AD42.5	26-32	AD42.5	47.8	13	52	50
G(PF)2"	G 2-AD54.5	37-44	AD54.5	59.6	14	64	50
NPT3/8"	NPT 3/8-AD13.0	4-8	AD13.0	16.5	7	18	100
NPT1/2"	NPT 1/2-AD15.8	8-12	AD15.8	21.3	8	22	100
NPT1/2"	NPT 1/2-AD21.2	8-12	AD21.2	21.3	8	22	100
NPT1/2"	NPT 1/2-AD21.2	8-12	AD21.2	21.3	8	22	100
NPT3/4"	NPT 3/4-AD21.2	13-18	AD21.2	26.6	11	30	100
NPT3/4"	NPT 3/4-AD28.5	13-18	AD28.5	26.6	11	30	50
NPT1"	NPT 1-AD34.5	15-22	AD34.5	33.4	11	36	50

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

QNE ELECTRIC
强能电气

声明
强能版权所有 需授权使用

尼龙软管
Plastic Flexible Pipes

规格灵活可定制
免费样品提供

非阻燃尼龙软管 Standard Nylon Flexible Conduit

- 产品材质:PA6尼龙(Polyamide)
- 工作温度:-40℃至125℃,短时可达140℃
- 产品结构:开口型和闭口型
- 产品特性:柔韧性好、抗扭曲、弯曲性能好，可以承受较重的负载;耐酸、润滑油、冷却液等;表面有光泽、耐摩擦
- 承载能力:可以承受脚踩的重压，不断裂、不变形，可以迅速恢复，并且本身无任何损伤。
- 颜色种类:黑色，其它颜色可定做(根据需要可开口)。
- 应用领域:机械制造、电气绝缘保护、照明设备、汽车制造、航空设备、地铁、火车、自动化控制等行业。
- 使用方法:将电线电缆插入管内，再配上软管接头对应的型号使用即可。

注：特殊规格需要请联系工厂

- Material: Nylon PA6
- Working temperature: -40℃ to 125℃, 140℃ can be reached but kept only for a short time
- Style: Close and split
- Colour: Black, other color available upon request.
- Property: Good flexibility, twist resistance and good bending performance, able to bear heavy loads; acid
- resistant, lubricant resistant and coolant resistant; luster on surface and abrasion resistant.
- Load bearing capacity: able to bear the heavy pressure from treading of feet without cracking or deformation. It can promptly recoil with no damages.
- Application: Machinery building, electrical insulating protection, illuminating equipment, automobile manufacturing, flight equipments, metro, trains and automatic control, etc.

Note: Special size and type, please contact us

软管规格(AD) Specification	英寸(inch)	编号 Item.No.	内径 x 外径(mm) Inner diameter x Outer diameter	弯曲半径(mm) Curved radius	包装 Std.Pkg (pcs)
AD10.0	1/4	FP-PA-10.0	6.5 x 10.0	16	100
AD13.0	5/16	FP-PA-13.0	10.0 x 13.0	20	100
AD15.8	3/8	FP-PA-15.8	12.0 x 15.8	30	100
AD18.5		FP-PA-18.5	14.3 x 18.5	40	100
AD21.2	1/2	FP-PA-21.2	17.0 x 21.2	45	100
AD25.0		FP-PA-25.0	20.0 x 25.0	45	50
AD28.5	3/4	FP-PA-28.5	23.0 x 28.5	50	50
AD31.5		FP-PA-31.5	26.0 x 31.5	55	50
AD34.5	1	FP-PA-34.5	29.0 x 34.5	60	50
AD42.5	1 1/4	FP-PA-42.5	36.0 x 42.5	70	25
AD54.5	2	FP-PA-54.5	48.0 x 54.5	90	25

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

尼龙软管
Plastic Flexible Pipes

规格灵活可定制
免费样品提供

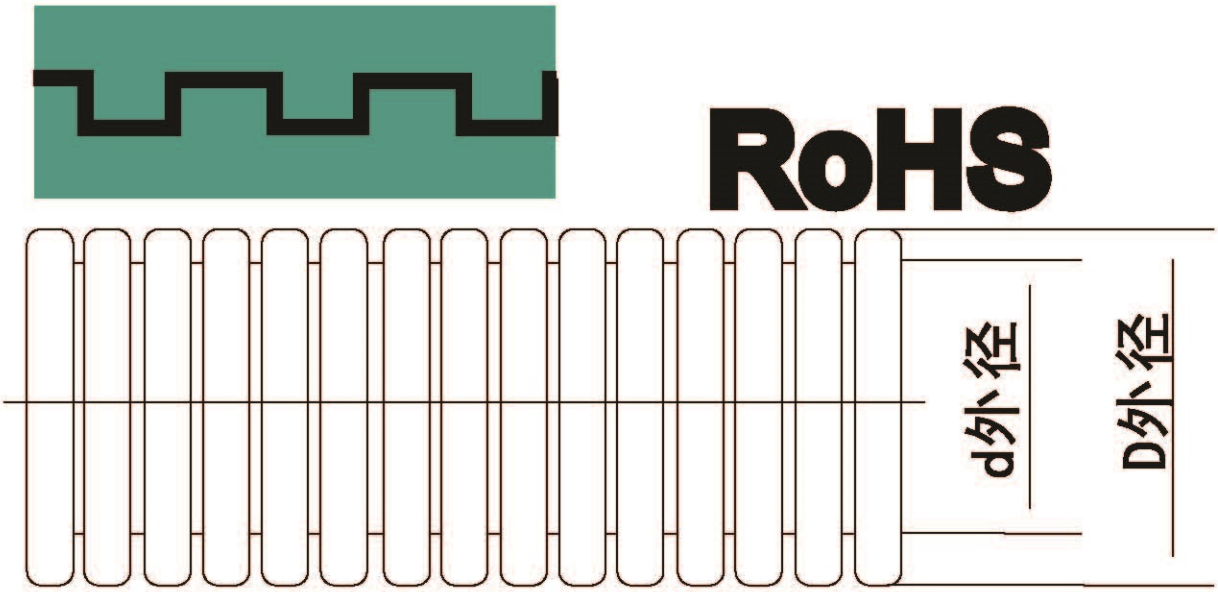

阻燃V0尼龙软管 Flame Retardant Nylon Flexible Conduit-V0

- 产品材质:PA6尼龙(Polyamide), 阻燃等级FV-0
- 工作温度:-40℃至125℃,短时可达140℃
- 产品结构:开口型和闭口型
- 产品特性:柔韧性好、抗扭曲、弯曲性能好，可以承受较重的负载;耐酸、润滑油、冷却液等;表面有光泽、耐摩擦
- 承载能力:可以承受脚踩的重压，不断裂、不变形，可以迅速恢复，并且本身无任何损伤。
- 颜色种类:黑色，其它颜色可定做(根据需要可开口)。
- 应用领域:机械制造、电气绝缘保护、照明设备、汽车制造、航空设备、地铁、火车、自动化控制等行业。
- 使用方法:将电线电缆插入管内，再配上软管接头对应的型号使用即可。

- Material: Nylon PA6-V0
- Working temperature: -40℃ to 125℃, 140℃ can be reached but kept only for a short time
- Style: Close and split
- Colour: Black, other color available upon request.
- Property: Good flexibility, twist resistance and good bending performance, able to bear heavy loads; acid resistant, lubricant resistant and coolant resistant; luster on surface and abrasion resistant.
- Load bearing capacity: able to bear the heavy pressure from treading of feet without cracking or deformation. It can promptly recoil with no damages.
- Application: Machinery building, electrical insulating protection, illuminating equipment, automobile manufacturing, flight equipments, metro, trains and automatic control, etc.

软管规格(AD) Specification	英寸(inch)	编号 Item.No.	内径 x 外径(mm) Inner diameter x Outer diameter	弯曲半径(mm) Curved radius	包装 Std.Pkg (pcs)
AD10.0	1/4	FFP-PA-10.0	6.5 x 10.0	16	100
AD13.0	5/16	FFP-PA-13.0	10.0 x 13.0	20	100
AD15.8	3/8	FFP-PA-15.8	12.0 x 15.8	30	100
AD18.5		FFP-PA-18.5	14.3 x 18.5	40	100
AD21.2	1/2	FFP-PA-21.2	17.0 x 21.2	45	100
AD25.0		FFP-PA-25.0	20.0 x 25.0	45	50
AD28.5	3/4	FFP-PA-28.5	23.0 x 28.5	50	50
AD31.5		FFP-PA-31.5	26.0 x 31.5	55	50
AD34.5	1	FFP-PA-34.5	29.0 x 34.5	60	50
AD42.5	1 1/4	FFP-PA-42.5	36.0 x 42.5	70	25
AD54.5	2	FFP-PA-54.5	48.0 x 54.5	90	25

尼龙软管
Plastic Flexible Pipes

规格灵活可定制
免费样品提供

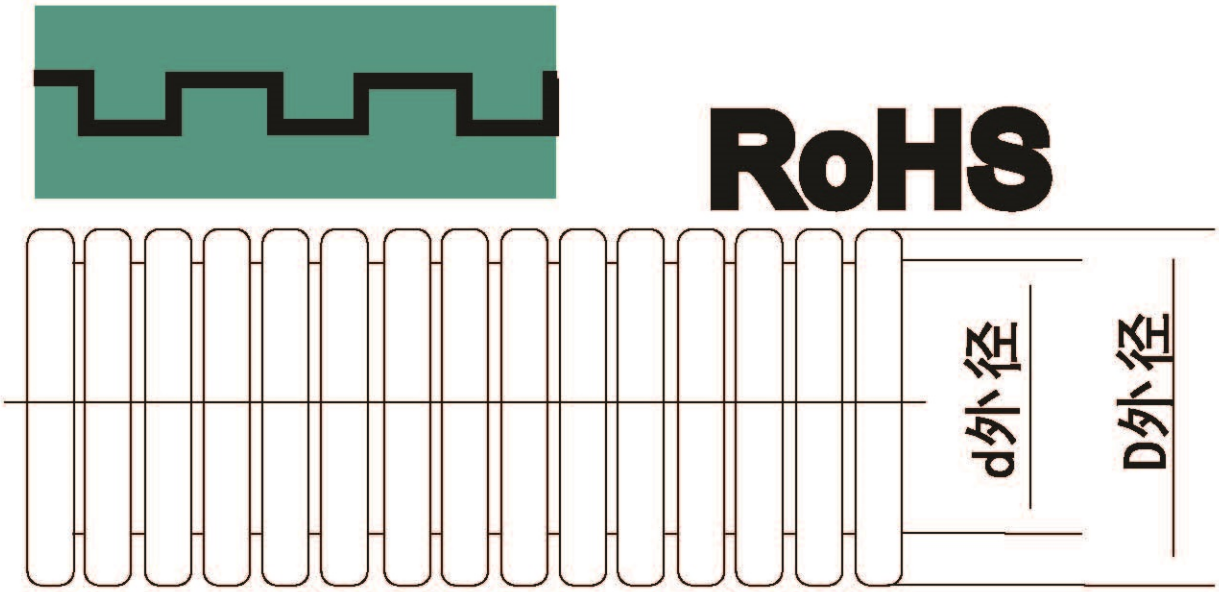

非阻燃聚丙烯软管Standard Polypropylene Flexible Conduit

- 产品材质:PP聚丙烯(Polypropylene)
- 工作温度:-30℃至100℃,短时可达110℃
- 产品结构:开口型和闭口型
- 产品特性:柔韧性好、抗扭曲、弯曲性能好，可以承受较重的负载;耐酸、润滑油、冷却液等;表面有光泽、耐摩擦
- 承载能力:可以承受脚踩的重压，不断裂、不变形，可以迅速恢复，并且本身无任何损伤。
- 颜色种类:黑色，其它颜色可定做(根据需要可开口)。
- 应用领域:机械制造、电气绝缘保护、照明设备、汽车制造、航空设备、地铁、火车、自动化控制等行业。
- 使用方法:将电线电缆插入管内，再配上软管接头对应的型号使用即可。

- Material: PP(Polypropylene)
- Working temperature: -30℃ to 100℃, 110℃ can be reached but kept only for a short time
- Style: Close and split
- Colour: Black, other color available upon request.
- Property: Good flexibility, twist resistance and good bending performance, able to bear heavy loads; acid resistant, lubricant resistant and coolant resistant; luster on surface and abrasion resistant.
- Load bearing capacity: able to bear the heavy pressure from treading of feet without cracking or deformation. It can promptly recoil with no damages.
- Application: Machinery building, electrical insulating protection, illuminating equipment, automobile manufacturing, flight equipments, metro, trains and automatic control, etc.

软管规格(AD) Specification	英寸(inch)	编号 Item.No.	内径 x 外径(mm) Inner diameter x Outer diameter	弯曲半径(mm) Curved radius	包装 Std.Pkg (pcs)
AD10.0	1/4	FP-PP-10.0	6.5 x 10.0	16	100
AD13.0	5/16	FP-PP-13.0	10.0 x 13.0	20	100
AD15.8	3/8	FP-PP-15.8	12.0 x 15.8	30	100
AD18.5		FP-PP-18.5	14.3 x 18.5	40	100
AD21.2	1/2	FP-PP-21.2	17.0 x 21.2	45	100
AD25.0		FP-PP-25.0	20.0 x 25.0	45	50
AD28.5	3/4	FP-PP-28.5	23.0 x 28.5	50	50
AD31.5		FP-PP-31.5	26.0 x 31.5	55	50
AD34.5	1	FP-PP-34.5	29.0 x 34.5	60	50
AD42.5	1 1/4	FP-PP-42.5	36.0 x 42.5	70	25
AD54.5	2	FP-PP-54.5	48.0 x 54.5	90	25

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

尼龙软管
Plastic Flexible Pipes

规格灵活可定制
免费样品提供

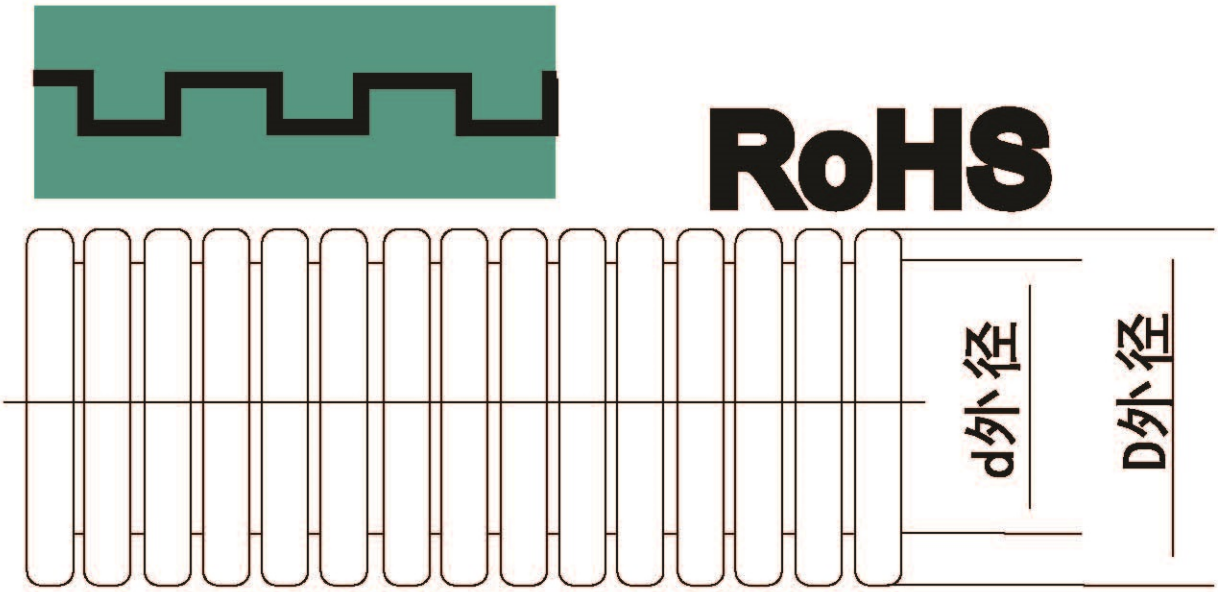

阻燃聚丙烯软管Flame Retardant Polypropylene Flexible Conduit

- 产品材质:PP聚丙烯(Polypropylene), 阻燃等级FV-0
- 工作温度:-30℃至100℃,短时可达110℃
- 产品结构:开口型和闭口型
- 产品特性:柔韧性好、抗扭曲、弯曲性能好，可以承受较重的负载;耐酸、润滑油、冷却液等;表面有光泽、耐摩擦
- 承载能力:可以承受脚踩的重压，不断裂、不变形，可以迅速恢复，并且本身无任何损伤。
- 颜色种类:黑色，其它颜色可定做(根据需要可开口)。
- 应用领域:机械制造、电气绝缘保护、照明设备、汽车制造、航空设备、地铁、火车、自动化控制等行业。
- 使用方法:将电线电缆插入管内，再配上软管接头对应的型号使用即可。

- Material: PP(Polypropylene)-V0
- Working temperature: -30℃ to 100℃, 110℃ can be reached but kept only for a short time
- Style: Close and split
- Colour: Black, other color available upon request.
- Property: Good flexibility, twist resistance and good bending performance, able to bear heavy loads; acid resistant, lubricant resistant and coolant resistant; luster on surface and abrasion resistant.
- Load bearing capacity: able to bear the heavy pressure from treading of feet without cracking or deformation. It can promptly recoil with no damages.
- Application: Machinery building, electrical insulating protection, illuminating equipment, automobile manufacturing, flight equipments, metro, trains and automatic control, etc.

软管规格(AD) Specification	英寸(inch)	编号 Item.No.	内径 x 外径(mm) Inner diameter x Outer diameter	弯曲半径(mm) Curved radius	包装 Std.Pkg (pcs)
AD10.0	1/4	FFP-PP-10.0	6.5 x 10.0	16	100
AD13.0	5/16	FFP-PP-13.0	10.0 x 13.0	20	100
AD15.8	3/8	FFP-PP-15.8	12.0 x 15.8	30	100
AD18.5		FFP-PP-18.5	14.3 x 18.5	40	100
AD21.2	1/2	FFP-PP-21.2	17.0 x 21.2	45	100
AD25.0		FFP-PP-25.0	20.0 x 25.0	45	50
AD28.5	3/4	FFP-PP-28.5	23.0 x 28.5	50	50
AD31.5		FFP-PP-31.5	26.0 x 31.5	55	50
AD34.5	1	FFP-PP-34.5	29.0 x 34.5	60	50
AD42.5	1 1/4	FFP-PP-42.5	36.0 x 42.5	70	25
AD54.5	2	FFP-PP-54.5	48.0 x 54.5	90	25

波纹管快速接头
Quick Connector for Flexible Pipes

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G（PF / BSP / PS)牙、NPT牙（可定制）。
- 产品材质：采用UL认可之尼龙PA66(防火等级UL94V-2)制成，(可定制)
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃;动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪之设计，夹紧浪管抗拉力强，超快速拔插装卸，提高安装效率
- 颜色种类：黑色、灰色，其它颜色可定做。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G (PF/BSP/PS), and NPT thread
- Materials: UL approved Nylon PA66 (Flammability UL 94V-2)
- Working temperature: -40℃ to 100℃
- Features: The claws of excellent design, to provide a fast & safe connection with the tubing and to get an excellent result of the pullout strength to be the best balanced performers for cable protection system.
- Color: Black(RAL9005)、grey(RAL7035),other color available upon request.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

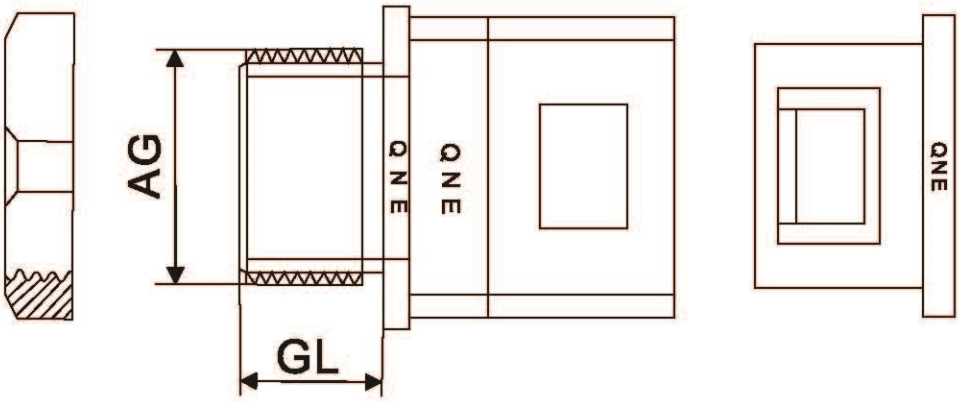

波纹管快速接头
Quick Connector for Flexible Pipes

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameter AG (mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD10.0	QTF-M10 -10.0	M10 x 1.5	10	8.5	50
	QTF-M12 -10.0	M12 x 1.5	12	8.5	50
AD13.0	QTF-M12 -13.0	M12 x 1.5	12	10	50
	QTF-M16 -13.0	M16 x 1.5	16	10	50
	QTF-M18 -13.0	M18 x 1.5	18	10	50
AD15.8	QTF-M16 -15.8	M16 x 1.5	16	10	50
	QTF-M18 -15.8	M18 x 1.5	18	12.5	50
	QTF-M20 -15.8	M20 x 1.5	20	12.5	50
AD18.5	QTF-M20 -18.5	M20 x 1.5	20	12.5	50
	QTF-M22 -18.5	M22 x 1.5	20	12.5	50
AD21.2	QTF-M20 -21.2	M20 x 1.5	20	13	50
	QTF-M24 -21.2	M24 x 1.5	24	13	50
	QTF-M25 -21.2	M25 x 1.5	25	13	50
AD25.0	QTF-M25 -25.0	M25 x 1.5	25	13	50
AD28.5	QTF-M25 -28.5	M25 x 1.5	25	13	20
	QTF-M27 -28.5	M27 x 1.5	27	13	20
	QTF-M30 -28.5	M30 x 1.5	30	13	20
	QTF-M32 -28.5	M32 x 1.5	32	13	20
AD34.5	QTF-M32 -34.5	M32 x 1.5	32	14	10
	QTF-M36 -34.5	M36 x 1.5	36	14	10
	QTF-M40 -34.5	M40 x 1.5	40	14	10
AD42.5	QTF-M40 -42.5	M40 x 1.5	40	15	8
	QTF-M48 -42.5	M48 x 1.5	48	15	8
AD54.5	QTF-M50 -54.5	M50 x 1.5	50	16	5
	QTF-M63 -54.5	M63 x 1.5	63	16	5
AD10.0	QTF-PG7 -10.0	PG7	12.4	8.5	50
AD13.0	QTF-PG9 -13.0	PG9	15.2	10	50
AD15.8	QTF-PG11 -15.8	PG11	18.4	12.5	50
AD15.8	QTF-PG13.5 -15.8	PG13.5	20.4	12.5	50
AD18.5	QTF-PG13.5-18.5	PG13.5	20.4	12.5	50
AD21.2	QTF-PG16 -21.2	PG16	22.5	13	50
AD25.0	QTF-PG21 -25	PG21	28.3	13	20
AD28.5	QTF-PG21 -28.5	PG21	28.3	13	20
AD34.5	QTF-PG29 -34.5	PG29	37	14	10
AD42.5	QTF-PG36 -42.5	PG36	47	15	8
AD54.5	QTF-PG42 -54.5	PG42	54	16	5
	QTF-PG48 -54.5	PG48	59.3	16	5
AD10.0	QTF-G1/4 -10.0	G(PF)1/4"	13.1	8.5	50
AD13.0	QTF-G3/8 -13.0	G(PF)3/8"	16.6	10	50
AD15.8	QTF-G3/8 -1.58	G(PF)3/8"	16.6	12.5	50
	QTF-G1/2 - 1.58	G(PF)1/2"	20.9	12.5	50
AD18.5	QTF-G1/2 -18.5	G(PF)1/2"	20.9	12.5	50
AD21.2	QTF-G1/2 -21.2	G(PF)1/2"	20.9	13	50
	QTF-G3/4 -21.2	G(PF)3/4"	26.4	13	50
AD25.0	QTF-G3/4 - 25	G(PF)3/4"	26.4	13	50
AD28.5	QTF-G3/4 -28.5	G(PF)3/4"	26.4	13	20
AD34.5	QTF-G1 -34.5	G(PF)1"	33.2	14	10
AD42.5	QTF-G1 1/4 -42.5	G(PF)1 1/4"	41.9	15	8
AD54.5	QTF-G1 1/2 -54.5	G(PF)1 1/2"	48	16	5
	QTF-G2 -54.5	G(PF)2"	60	16	5

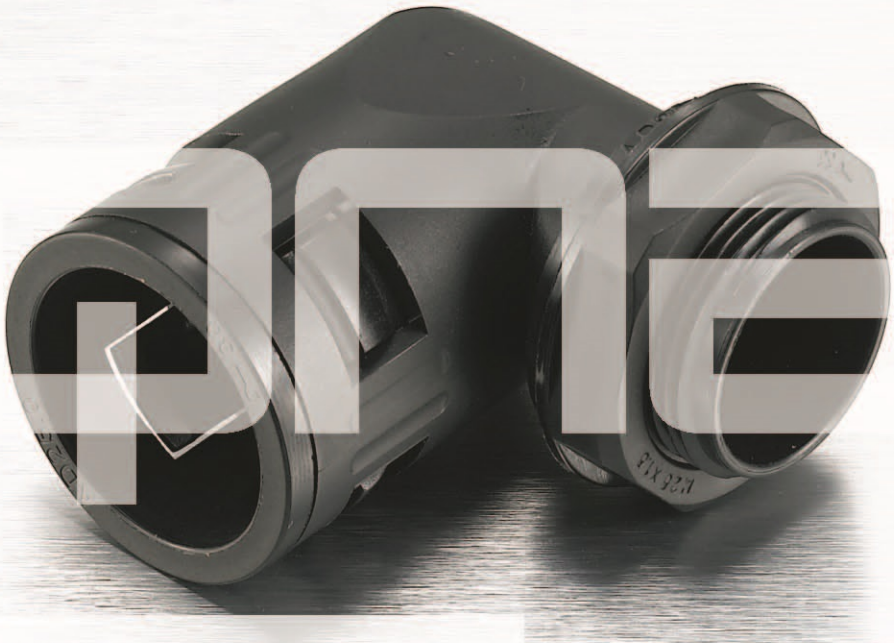

90度波纹管快速接头
90 Degree Quick Connector for Flexible Pipes

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙（可定制）。
- 产品材质：采用UL认可之尼龙PA66(防火等级UL94V-2)制成，(可定制)
- 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃;动态-20℃至80℃，或瞬间可耐热至100℃.
- 产品特性：特殊夹紧爪之设计，夹紧浪管抗拉力强，超快速拔插装卸，提高安装效率
- 颜色种类：黑色、灰色，其它颜色可定做。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G (PF/BSP/PS), and NPT thread
- Materials: UL approved Nylon PA66 (Flammability UL 94V-2)
- Working temperature: -40℃ to 100℃
- Features: The claws of excellent design, to provide a fast & safe connection with the tubing and to get an excellent result of the pullout strength to be the best balanced performers for cable protection system.
- Color: Black(RAL9005)、grey(RAL7035),other color available upon request.

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

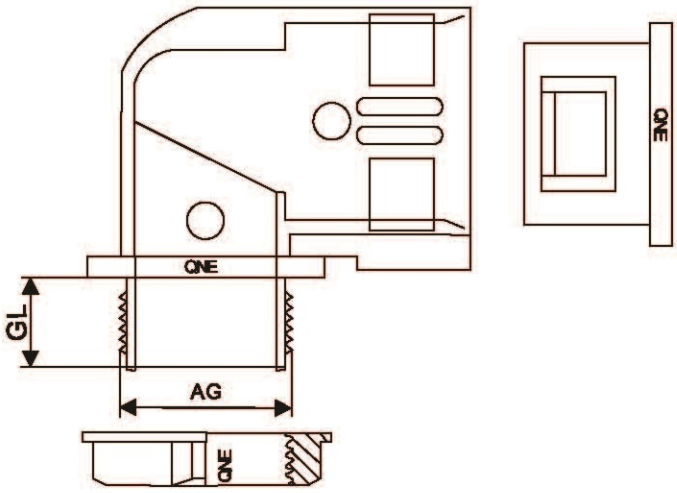

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

90度波纹管快速接头
90 Degree Quick Connector for Flexible Pipes

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameterAG(mm)	螺纹长度 Thread Length GL(mm)
AD10.0	RTF-M10-10.0	M10 x 1.5	10.0	10.0
	RTF-M12-10.0	M12 x 1.5	12.0	10.0
AD13.0	RTF-M16-13.0	M16 x 1.5	16.0	10.0
	RTF-M18-13.0	M18 x 1.5	18.0	10.0
	RTF-M20-13.0	M20 x 1.5	20.0	10.0
AD15.8	RTF-M16-15.8	M16 x 1.5	16.0	10.0
	RTF-M18-15.8	M18 x 1.5	18.0	10.0
	RTF-M20-15.8	M20 x 1.5	20.0	10.0
AD18.5	RTF-M20-18.5	M20 x 1.5	20.0	11.5
AD21.2	RTF-M20-21.2	M20 x 1.5	20.0	13.0
	RTF-M24-21.2	M24 x 1.5	24.0	13.0
	RTF-M25-21.2	M25 x 1.5	25.0	13.0
AD25.0	RTF-M25-25.0	M25 x 1.5	25.0	13.0
AD28.5	RTF-M25-28.5	M25 x 1.5	25.0	13.0
	RTF-M27-28.5	M27 x 1.5	27.0	13.0
	RTF-M30-28.5	M30 x 1.5	30.0	13.0
AD34.5	RTF-M32-34.5	M32 x 1.5	32.0	14.5
	RTF-M36-34.5	M36 x 1.5	36.0	14.5
	RTF-M40-34.5	M40 x 1.5	40.0	14.5
AD42.5	RTF-M40-42.5	M40 x 1.5	40.0	14.5
	RTF-M48-42.5	M48 x 1.5	48.0	14.5
AD54.5	RTF-M50-54.5	M50 x 1.5	50.0	16.0
	RTF-M63-54.5	M63 x 1.5	63.0	16.0
AD10.0	RTF-PG7-10.0	PG7	12.5	10.0
AD13.0	RTF-PG9-13.0	PG9	15.2	10.0
AD15.8	RTF-PG11-15.8	PG11	18.6	10.0
AD18.5	RTF-PG13.5-18.5	PG13.5	20.4	11.0
AD21.2	RTF-PG16-21.2	PG16	22.5	13.0
AD25.0	RTF-PG21-25	PG21	28.3	13.0
AD28.5	RTF-PG21-28.5	PG21	28.3	13.0
AD34.5	RTF-PG29-34.5	PG29	37.0	14.5
AD42.5	RTF-PG36-42.5	PG36	47.0	14.5
AD54.5	RTF-PG42-54.5	PG42	54.0	16.0
AD54.5	RTF-PG48-54.5	PG48	59.3	16.0
AD10.0	RTF-G1/4-10.0	G(PF)1/4"	13.157	10.0
AD13.0	RTF-G3/8-13.0	G(PF)3/8"	16.662	10.0
AD15.8	RTF-G1/2-15.8	G(PF)1/2"	20.955	10.0
AD18.5	RTF-G1/2-18.5	G(PF)1/2"	20.955	11.0
AD21.2	RTF-G1/2-21.2	G(PF)1/2"	20.955	13.0
AD25.0	RTF-G3/4-25	G(PF)3/4"	26.441	13.0
AD28.5	RTF-G3/4-28.5	G(PF)3/4"	26.441	13.0
AD34.5	RTF-G1-34.5	G(PF)1"	33.2	14.5
AD42.5	RTF-G1 1/4-42.5	G(PF)1 1/4"	41.9	14.5
AD54.5	RTF-G1 1/2-54.5	G(PF)1 1/2"	48	16.0
AD54.5	RTF-G2-54.5	G(PF)2"	60	16.0

防水浪管接头
Watertight Corrugated Tubing Fitting

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分采用UL认可之无卤素 (Halogen-Free) 尼龙PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料);
  B.D部分采用三元乙丙(EPDM)耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：-40℃至100℃
- 产品特性： 本款高性能防水尼龙浪管盒接头能完美地抗水压，是一款即使拉扯波纹管也能完全保持气密的产品。产品广泛地应用于移动式的自动化设备之防水、防油与气密的场合。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66(Flammability UL 94V-2)for A. C. F parts, Weather-resistant EPDM rubber for B. D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc).
- Protection degree: IP68
- Working temperature: -40℃ to 100℃
- Features: The Powerful Watertight Fittings build the best tightening power by a very high and active compression force to resist the ingress of high pressure water jet from any angle which can provide 100% dynamic waterproof and airtight performance over the widest range of corrugated tubings.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

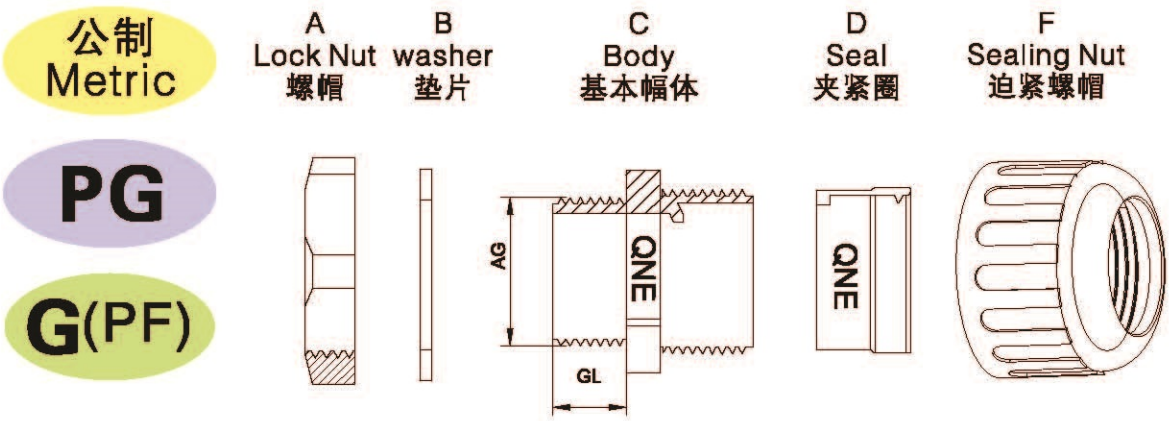

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

防水浪管接头
Watertight Corrugated Tubing Fitting

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameter AG(mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD10.0	WTF-M10-10.0	M12 x 1.5	12	9	50
	WTF-M12-10.0	M12 x 1.5	12	9	50
	WTF-M16-10.0-ST	M16 x 1.5	16	10	50
AD13.0	WTF-M16-13.0-ST	M16 x 1.5	16	10	50
	WTF-M16-13.0	M16 x 1.5	16	15	50
AD15.8	WTF-M16-15.8-ST	M16 x 1.5	16	10	50
	WTF-M16-15.8	M16 x 1.5	16	15	50
	WTF-M20-15.8-ST	M20 x 1.5	20	10	50
	WTF-M20-15.8	M20 x 1.5	20	15	50
	WTF-M22-15.8-ST	M22 x 1.5	22	10	50
	WTF-M22-15.8	M22 x 1.5	22	15	50
	WTF-M25-15.8-ST	M25 x 1.5	25	12	50
AD18.5	WTF-M16-18.5-ST	M16 x 1.5	16	10	50
	WTF-M16-18.5	M16 x 1.5	16	15	50
	WTF-M20-18.5-ST	M20 x 1.5	20	10	50
	WTF-M20-18.5	M20 x 1.5	20	15	50
	WTF-M22-18.5-ST	M22 x 1.5	22	10	50
	WTF-M22-18.5	M22 x 1.5	22	15	50
	WTF-M25-18.5-ST	M25 x 1.5	25	12	50
AD21.2	WTF-M20-21.2-ST	M20 x 1.5	20	10	50
	WTF-M20-21.2	M20 x 1.5	20	15	50
	WTF-M25-21.2-ST	M25 x 1.5	25	10	50
	WTF-M25-21.2	M25 x 1.5	25	15	50
AD25.0	WTF-M20-25-ST	M20 x 1.5	20	10	50
	WTF-M20-25	M20 x 1.5	20	15	50
	WTF-M25-25-ST	M25 x 1.5	25	10	50
	WTF-M25-25	M25 x 1.5	25	15	50
AD26.2	WTF-M20-26.2-ST	M20 x 1.5	20	10	50
	WTF-M20-26.2	M20 x 1.5	20	15	50
	WTF-M25-26.2-ST	M25 x 1.5	25	10	50
	WTF-M25-26.2	M25 x 1.5	25	15	50
AD28.5	WTF-M25-28.5-ST	M25 X 1.5	25	10	50
	WTF-M25-28.5	M25 X 1.5	25	15	50
AD34.5	WTF-M32-34.5-ST	M32 X 1.5	32	10	20
	WTF-M32-34.5	M32 X 1.5	32	15	20
AD42.5	WTF-M40-42.5	M40 X 1.5	40	15	10
	WTF-M50-42.5	M50 X 1.5	50	15	10
AD48.5	WTF-M50-48.5	M50 X 1.5	50	15	10
AD54.5	WTF-M50-54.5	M50 X 1.5	50	22	10
	WTF-M63-54.5	M63 X 1.5	63	25	10
AD10.0	WTF-PG7-10.0	PG7	12.5	9	50
	WTF-PG9-10.0	PG9	15.2	9	50
AD13.0	WTF-PG11-13.0	PG11	18.6	10	50
AD15.8	WTF-PG13.5-15.8	PG13.5	20.4	10	50
	WTF-PG16-15.8	PG16	22.5	10.8	50
AD18.5	WTF-PG13.5-18.5	PG13.5	20.4	10	50
	WTF-PG16-18.5	PG16	22.5	10.8	50

防水浪管接头
Watertight Corrugated Tubing Fitting

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 AG Outer diameter (mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD21.2	WTF-PG16-21.2	PG16	22.5	13	50
	WTF-PG21-21.2	PG21	28.3	13	50
AD25.0	WTF-PG16-25	PG16	22.5	13	50
	WTF-PG21-25	PG21	28.3	13	50
AD26.2	WTF-PG16-26.2	PG16	22.5	13	50
	WTF-PG21-26.2	PG21	28.3	13	50
AD28.5	WTF-PG21-28.5	PG21	28.3	13	50
AD34.5	WTF-PG29-34.5	PG29	37	13	20
AD42.5	WTF-PG36-42.5	PG36	47	13	10
AD48.5	WTF-PG42-48.5	PG42	54	16	10
AD54.5	WTF-PG48-54.5	PG48	59.3	16	10
AD10.0	WTF-PF1/4-10.0	G(PF)1/4"	13.1	9	50
AD13.0	WTF-PF3/8-13.0	G(PF)3/8"	16.6	15	50
AD15.8	WTF-PF1/2-15.8	G(PF)1/2"	20.9	15	50
AD18.5	WTF-PF1/2-18.5	G(PF)1/2"	20.9	15	50
AD21.2	WTF-PF1/2-21.2	G(PF)1/2"	20.9	15	50
	WTF-PF3/4-21.2	G(PF)3/4"	26.4	15	50
AD25.0	WTF-PF1/2-25	G(PF)1/2"	20.9	15	50
	WTF-PF3/4-25	G(PF)3/4"	26.4	15	50
AD26.2	WTF-PF1/2-26.2	G(PF)1/2"	20.9	15	50
	WTF-PF3/4-26.2	G(PF)3/4"	26.4	15	50
AD28.5	WTF-PF3/4-28.5	G(PF)3/4"	26.4	15	50
AD34.5	WTF-PF1-34.5	G(PF)1"	33.2	15	20
AD42.5	WTF-PF1 1/4-42.5	G(PF)1 1/4"	41.9	15	10
AD54.5	WTF-PF1 1/2-54.5	G(PF)1 1/2"	48	15	10
	WTF-PF2-54.5	G(PF)2"	60	15	10

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

90度防水浪管接头
90 Degree Watertight Corrugated Tubing Fitting

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：A.C.F部分采用UL认可之无卤素 (Halogen-Free) 尼龙PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料);B.D部分采用三元乙丙(EPDM)耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- 保护等级：IP68-10
- 工作温度：-40℃至100℃
- 产品特性： 本款高性能防水尼龙浪管盒接头能完美地抗水压，是一款即使拉扯波纹管也能完全保持气密的产品。产品广泛地应用于移动式的自动化设备之防水、防油与气密的场合。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66(Flammability UL 94V-2)for A. C. F parts, Weather-resistant EPDM rubber for B. D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali,etc).
- Protection degree: IP68
- Working temperature: -40℃ to 100℃
- Features: The Powerful Watertight Fittings build the best tightening power by a very high and active compression force to resist the ingress of high pressure water jet from any angle which can provide 100% dynamic waterproof and airtight performance over the widest range of corrugated tubings.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

公制
Metric

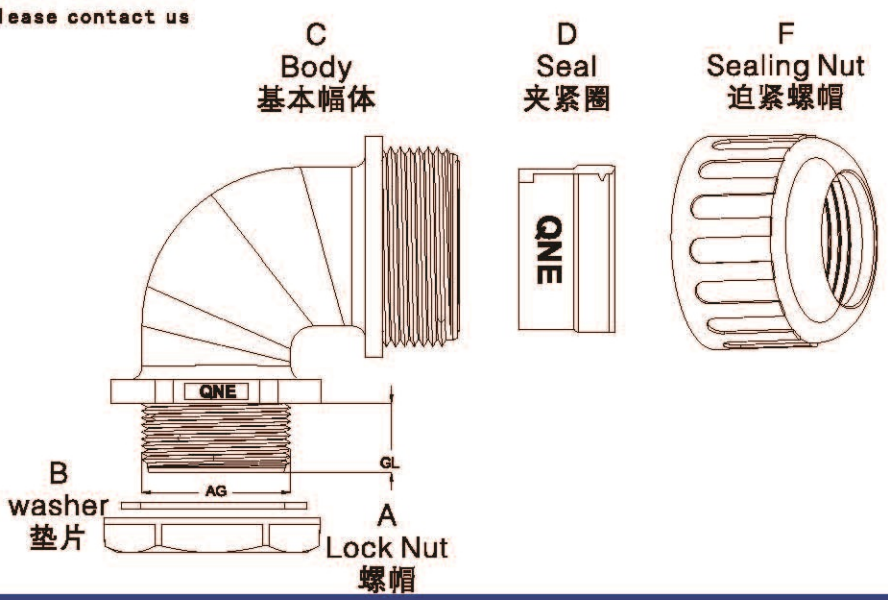

90度防水浪管接头
90 Degree Watertight Corrugated Tubing Fitting

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameter AG (mm)	螺纹长度 Thread Lengt GL (mm)	幅体最小通径 Body Min. L.D. (mm)	包装 Std.Pkg (pcs)
AD13.0	EWTF-M16-13.0-ST	M16 x 1.5	16.0	10.0	10.7	50
AD15.8	EWTF-M16-15.8-ST	M16 x 1.5	16.0	10.0	11.1	50
	EWTF-M16-15.8	M16 x 1.5	16.0	15.0	11.0	50
	EWTF-M20-15.8-ST	M20 x 1.5	20.0	10.0	14.7	50
	EWTF-M20-15.8	M20 x 1.5	20.0	15.0	14.7	50
AD18.5	EWTF-M16-18.5-ST	M16 x 1.5	16.0	10.0	11.0	50
	EWTF-M16-18.5	M16 x 1.5	16.0	15.0	11.0	50
	EWTF-M20-18.5-ST	M20 x 1.5	20.0	10.0	14.7	50
	EWTF-M20-18.5	M20 x 1.5	20.0	15.0	14.7	50
AD21.2	EWTF-M20-21.2-ST	M20 x 1.5	20.0	10.0	14.8	50
	EWTF-M20-21.2	M20 x 1.5	20.0	15.0	14.8	50
AD25.0	EWTF-M25-25.0-ST	M25 x 1.5	25.0	10.0	19.2	50
	EWTF-M25-25.0	M25 x 1.5	25.0	15.0	19.2	50
AD28.5	EWTF-M25-28.5-ST	M25 x 1.5	25.0	10.0	19.9	50
	EWTF-M25-28.5	M25 x 1.5	25.0	15.0	19.9	50
AD34.5	EWTF-M32-34.5	M32 x 1.5	32.0	15.0	26.2	20
AD42.5	EWTF-M40-42.5	M40 x 1.5	40.0	20.0	34.0	10

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

高抗拉波纹管接头
Superb Pullout Strength Conduit Fitting

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：采用UL认可之无卤素 (Halogen-Free) 尼龙PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料);
- 保护等级：IP65
- 工作温度：-40℃至100℃
- 产品特性：本款高性能抗拉型浪管接头，适合不同材质，不同硬度浪管
- 颜色种类：黑色、灰色，其他颜色可定做

注：特殊规格需要请联系工厂

公制 Metric

PG

G(PF)

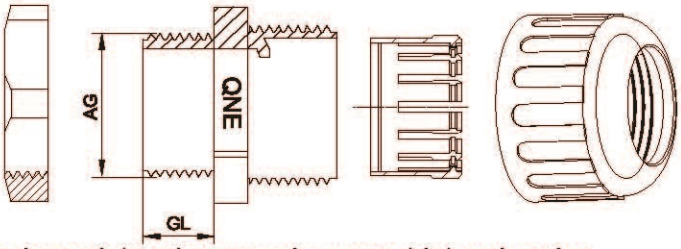

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:UL approved Nylon PA66 (Flammability UL 94V-2)
- Protection degree: IP65
- Working temperature: -40℃ to 100℃
- Features: The Powerful Watertight Fittings build the best tightening power by a very high and active compression force to resist the ingress of high pressure water jet from any angle which can provide 100% dynamic waterproof and airtight performance over the widest range of corrugated tubings.
- Colours:Black(RAL9005),gray(RAL7035),other color available upon request.

Note: Special size and type, please contact us

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 AG Outer diameter (mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD10.0	STF-M12-10.0	M12 x 1.5	12	9	50
	STF-M16-10.0-ST	M16 x 1.5	16	10	50
AD13.0	STF-M16-13.0-ST	M16 x 1.5	16	10	50
	STF-M16-13.0	M16 x 1.5	16	15	50
AD15.8	STF-M16-15.8-ST	M16 x 1.5	16	10	50
	STF-M16-15.8	M16 x 1.5	16	15	50
	STF-M20-15.8-ST	M20 x 1.5	20	10	50
	STF-M20-15.8	M20 x 1.5	20	15	50
	STF-M22-15.8-ST	M22 x 1.5	22	10	50
	STF-M22-15.8	M22 x 1.5	22	15	50
	STF-M25-15.8-ST	M25 x 1.5	25	12	50

高抗拉波纹管接头
Superb Pullout Strength Conduit Fitting

规格灵活可定制
免费样品提供

适配软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameter AG (mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD18.5	WTF-M16-18.5-ST	M16 x 1.5	16	10	50
	WTF-M16-18.5	M16 x 1.5	16	15	50
	WTF-M20-18.5-ST	M20 x 1.5	20	10	50
	WTF-M20-18.5	M20 x 1.5	20	15	50
	WTF-M22-18.5-ST	M22 x 1.5	22	10	50
	WTF-M22-18.5	M22 x 1.5	22	15	50
	WTF-M25-18.5-ST	M25 x 1.5	25	12	50
AD21.2	WTF-M20-21.2-ST	M20 x 1.5	20	10	50
	WTF-M20-21.2	M20 x 1.5	20	15	50
	WTF-M25-21.2-ST	M25 x 1.5	25	10	50
	WTF-M25-21.2	M25 x 1.5	25	15	50
AD25.0	WTF-M25-25.0-ST	M25 x 1.5	25	10	50
	WTF-M25-25.0	M25 x 1.5	25	15	50
AD28.5	WTF-M25-28.5-ST	M25 x 1.5	25	10	50
	WTF-M25-28.5	M25 x 1.5	25	15	50
AD34.5	WTF-M32-34.5-ST	M32 x 1.5	32	10	20
	WTF-M32-34.5	M32 x 1.5	32	15	20
AD42.5	WTF-M40-42.5	M40 X 1.5	40	15	10
	WTF-M50-42.5	M50 X 1.5	50	15	10
AD48.5	WTF-M50-48.5	M50 X 1.5	50	15	10
AD54.5	WTF-M50-54.5	M50 X 1.5	50	22	10
	WTF-M63-54.5	M63 X 1.5	63	25	10
AD10.0	WTF-PG7-10.0	PG7	12.5	9	50
	WTF-PG9-10.0	PG9	15.2	9	50
AD13.0	WTF-PG11-13.0	PG11	18.6	10	50
AD15.8	WTF-PG13.5-15.8	PG13.5	20.4	10	50
	WTF-PG16-15.8	PG16	22.5	10.8	50
AD18.5	WTF-PG13.5-18.5	PG13.5	20.4	10	50
	WTF-PG16-18.5	PG16	22.5	10.8	50
AD21.2	WTF-PG16-21.2	PG16	22.5	13	50
	WTF-PG21-21.2	PG21	28.3	13	50
AD28.5	WTF-PG21-28.5	PG21	28.3	13	50
AD34.5	WTF-PG29-34.5	PG29	37	13	20
AD42.5	WTF-PG36-42.5	PG36	47	13	10
AD54.5	WTF-PG48-54.5	PG48	59.3	16	10
AD10.0	WTF-PF1/4-10.0	G(PF)1/4″	13.1	9	50
AD13.0	WTF-PF3/8-13.0	G(PF)3/8″	16.6	15	50
AD15.8	WTF-PF1/2-15.8	G(PF)1/2″	20.9	15	50
AD18.5	WTF-PF1/2-18.5	G(PF)1/2″	20.9	15	50
AD21.2	WTF-PF1/2-21.2	G(PF)1/2″	20.9	15	50
	WTF-PF3/4-21.2	G(PF)3/4″	26.4	15	50
AD28.5	WTF-PF3/4-28.5	G(PF)3/4″	26.4	15	50
AD34.5	WTF-PF1-34.5	G(PF)1″	33.2	15	20
AD42.5	WTF-PF1 1/4-42.5	G(PF)1 1/4″	41.9	15	10
AD54.5	WTF-PF1 1/2-54.5	G(PF)1 1/2″	48	15	10
	WTF-PF2-54.5	G(PF)2″	60	15	10

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

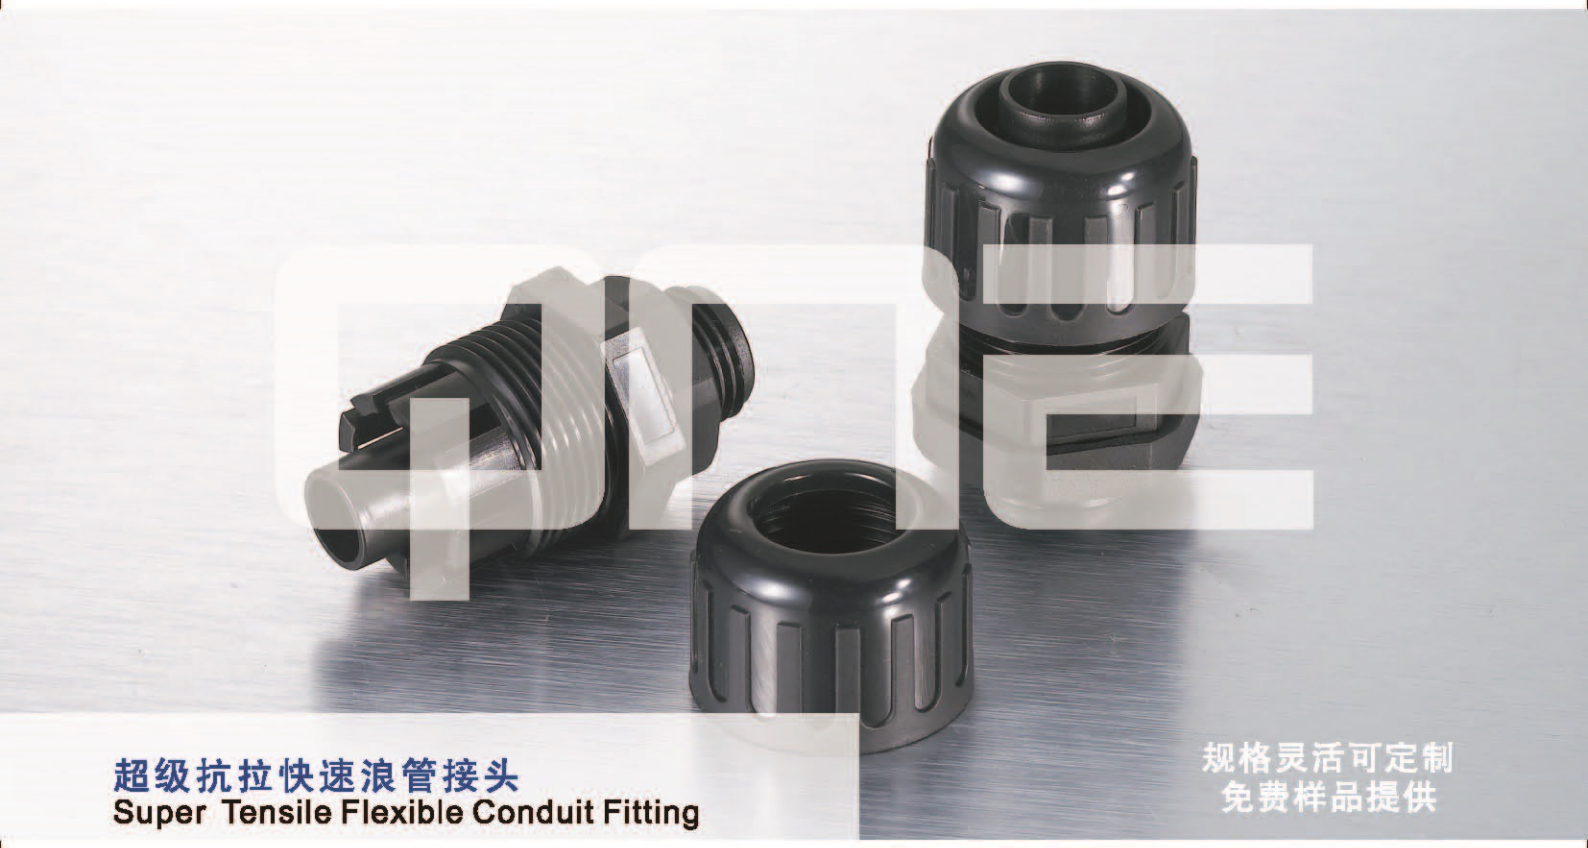

超级抗拉快速浪管接头
Super Tensile Flexible Conduit Fitting

规格灵活可定制
免费样品提供

- 材质：尼龙PA66
- 用法：1.先將本体套入基板，再以螺帽固定。
  2.将浪管插入本体中，再以迫紧头作正向旋转迫紧。
- 颜色种类：黑色及灰色（可定制色系）。
- 螺牙规格：公制牙（Metric）、G(PF/BSP/PS) 牙、PG 牙（可定做）。
- 性能：具有完美超级的抗拉力，适用所有浪管（PP/PE/PA）及其他软管，无视软管的材质及性能，解决开口式浪管衔接固定问题，具有快速安装，完美抗拉及防水性能。
- Material:Nylon PA66
- Install for Use:
  1.Put the body of corrugated tubing fittings into panel mounting hole, assembly can then be secured in the panel by the locknut.
  2.Insert the corrugated tubing into the tubing fittings, then tightens the domed sealing nut.
- Color:Black, light grey, other color available upon request
- Thread type:Metric, PG thread. Other threads available upon request.
- Application:Superb pullout strength, suitable for each material (PA/PE/PP) corrugated tubing etc, ignore the material of corrugated tubing and performance, can solve the issues of split plastic corrugated tubing to join and fixed, can quick-fit to assemble, superb pullout strength and waterproof performance.

公制
Metric

PG

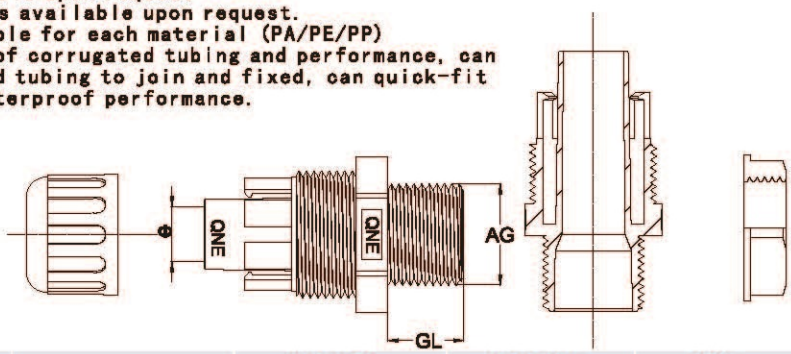

适配软管 Accommodated Pipes	适穿线缆 Φ(mm)	编号Item.No.	螺牙规格 Thread	螺纹外径 AG Outer diameter (mm)	螺纹长度 Thread Lengt GL (mm)	包装 Std.Pkg (pcs)
AD15.8	Φ9.5	QNE-M16-15.8	M16 X 1.5	16	15	50
	Φ9.5	QNE-M20-15.8	M20 X 1.5	20	15	50
	Φ9.5	QNE-PG16-15.8	PG16	22.5	10.8	50
AD18.5	Φ10.2	QNE-M16-18.5	M16 X 1.5	16	15	50
	Φ10.2	QNE-M20-18.5	M20 X 1.5	20	15	50
	Φ12	QNE-PG16-18.5	PG16	22.5	10.8	50

尼龙软管支架
Bracket for Nylon Flexible Conduit

规格灵活可定制
免费样品提供

- 产品材质：尼龙PA66（polyamide）
- 工作温度：-40℃~+110℃
- 产品颜色：黑色 （特殊颜色可以定做）
- 供应范围：淘汰老旧带盖与不带盖两种市场分类，采用美观衔接牢固整体新型设计

注：特殊规格需要请联系工厂

- Material: UL approved Halogen-Free Nylon PA66 (flammability UL 94V-2);
- Working temperature: -40℃ to 100℃
- Colours: Black(RAL9005), other color available upon request.

Note: Special size and type, please contact us

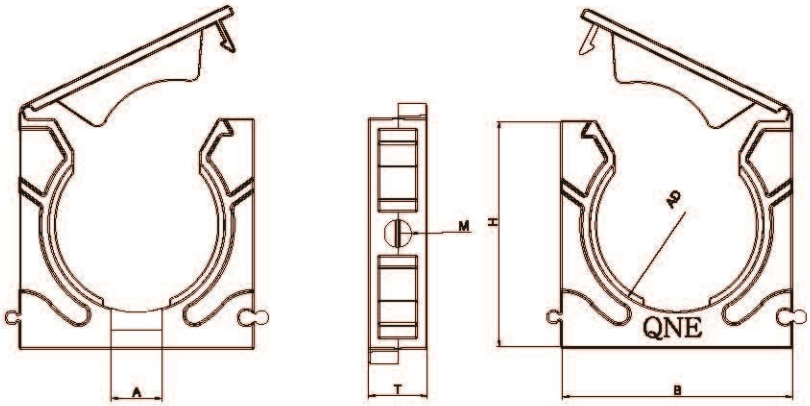

型号Size	适配软管规格AD Accommodated Pipes		H(mm)	B(mm)	T(mm)	M(mm)	A(mm)
QNE-ZJ-10.0	AD10.0	1/4	30	23	12.5	4	6.5
QNE-ZJ-13.0	AD13.0	5/16	30	23	12.5	4	6.5
QNE-ZJ-15.8	AD15.8	3/8	30	23	12.5	4	6.5
QNE-ZJ-18.5	AD18.5		35	30	15	5	6.5
QNE-ZJ-21.2	AD21.2	1/2	35	30	15	5	6.5
QNE-ZJ-25.0	AD25.0		35	30	15	5	6.5
QNE-ZJ-28.5	AD28.5	3/4	42	38	16	6	11.5
QNE-ZJ-34.5	AD34.5	1	51	43	16	6	11.5
QNE-ZJ-42.5	AD42.5	1 1/4	61	51	16	6	11.5
QNE-ZJ-54.5	AD54.5	2	74	64	20	6	11.5

产品数据不定期更新请联系工厂（Product Data Updated Aperiodically）

PVC包塑金属软管
PVC Coated Flexible Steel Conduit

规格灵活可定制
免费样品提供

- 产品材质：内部由热镀锌钢带绕制而成，外覆PVC
- 颜色种类：黑色、灰色
- 工作温度：-25℃~+90℃
- 保护等级： IP68
- 使用方式：先将电线穿入管内，再配合蛇管固定头使用即可。
- 用途：保护电线及绝缘、防水用，并可增进电线弯曲的美观。

注：特殊规格需要请联系工厂

- Material: Its core consists of hot dipped galvanized steel, external covered with a layer of PVC
- Colors: Black, gray
- Working Temperature: -25℃~+90℃
- Protection Level: IP68
- Using Method: Inserting the wire or cable into the conduit and the equipped with the metal flexible connector.
- Application: Protect the cable; Waterproof

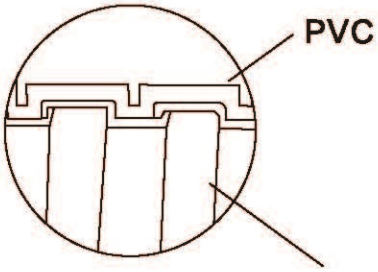

Note: Special size and type, please contact us

Metric System	G System	Inner Diameter (mm)		Outer Diameter (mm)		Package
		Min	Max	Mix	Max	
Φ10	5/16″	9.9	10.2	13	13.3	50
Φ12	3/8″	12.3	12.6	15.4	15.7	50
Φ13		13.3	13.6	15.4	15.7	50
Φ15		14.5	14.8	17.4	17.7	50
Φ16	1/2″	15.5	15.8	19.4	19.7	50
Φ20	3/4″	20.4	20.7	24.4	24.7	50
Φ25	1″	25.5	26	29.6	30.1	50
Φ32	1 1/4″	32.7	33.2	37.7	38.2	25
Φ38	1 1/2″	38.5	39	44.7	45.2	25
Φ51	2″	50.5	51	58.2	58.7	20
Φ64	2 1/2″	62.3	63	70.3	71	10
Φ75	3″	74.4	74.9	83.3	83.8	10
Φ100	4″	97.5	98.5	108.5	108.8	10

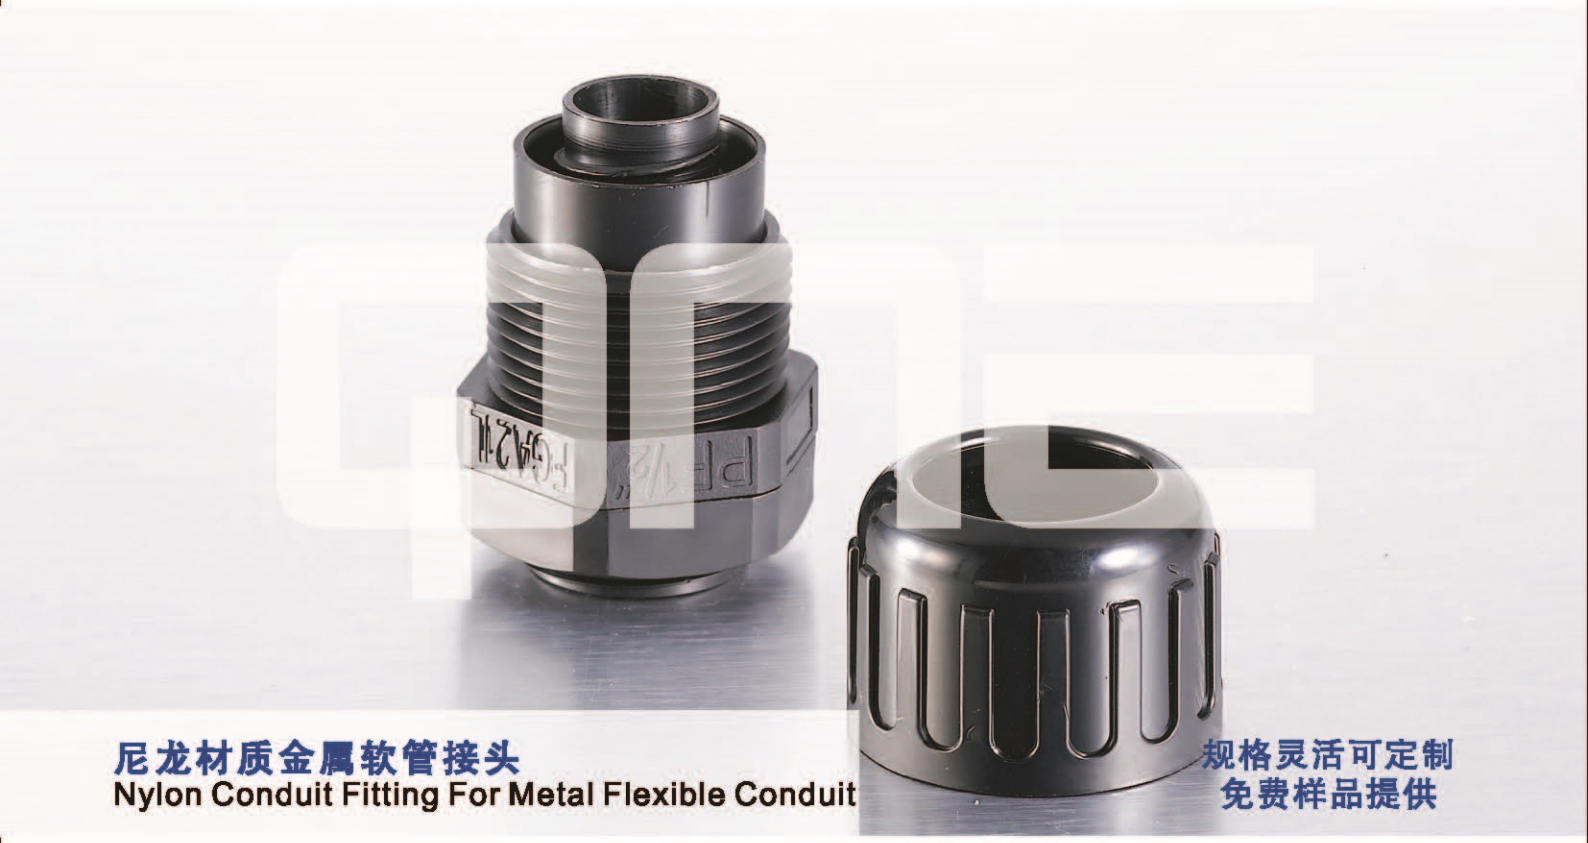

尼龙材质金属软管接头
Nylon Conduit Fitting For Metal Flexible Conduit

规格灵活可定制
免费样品提供

- 螺牙规格:公制牙（Metric）、G(PF / BSP / PS)牙及PG牙。
- 产品材质: UL 认可之尼龙PA66 制成（防火等级 UL 94V-2）。
- 颜色种类: 黑色及灰色。
- 工作温度: 静态-40℃至100℃,或瞬间可耐热至120
- 适用范围: 可结合自 5/16″ 到 2″ 之被覆金属蛇管规格使用。

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials: UL approved Nylon PA66 (Flammability UL 94V-2)
- Colours: Black(RAL9005),Gray(RAL7035)
- Working temperature: -40℃ to 100℃
- Application: Connect metal flexible conduit to provide strong pull-out strength and anti-vibration function; waterproof

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

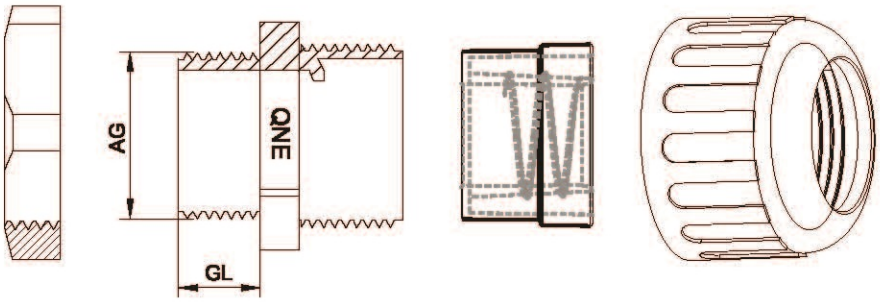

尼龙材质金属软管接头
Nylon Conduit Fitting For Metal Flexible Conduit

规格灵活可定制
免费样品提供

适配金属软管 Accommodated Pipes	编号Item. No.	螺牙规格 Thread	螺纹外径 Outer diameter AG(mm)	螺纹长度 Thread Length GL(mm)	包装 Std.Pkg (pcs)
5/16"管	M16-AD15.8-ST	M16 X 1.5	16	10	50
	M16-AD15.8	M16 X 1.5	16	15	50
3/8"管	M16-AD15.8-ST	M16 X 1.5	16	10	50
	M16-AD15.8	M16 X 1.5	16	15	50
1/2"管	M20-AD21.2-ST	M20 X 1.5	20	10	50
	M20-AD21.2	M20 X 1.5	20	15	50
3/4"管	M25-AD26.2-ST	M25 X 1.5	25	10	50
	M25-AD26.2	M25 X 1.5	25	15	50
1"管	M32-AD34.5-ST	M32 X 1.5	32	10	20
	M32-34.5	M32 X 1.5	32	15	20
1 1/4"管	M40-AD42.5	M40 X 1.5	40	15	10
1 1/2"管	M50-AD48	M50 X 1.5	50	15	10
2"管	M63-AD54.5	M63 X 1.5	63	25	10
5/16"管	PG16-15.8	PG16	22.5	10.8	50
3/8"管	PG16-15.8	PG16	22.5	10.8	50
1/2"管	PG16-21.2	PG16	22.5	13	50
3/4"管	PG21-28.5	PG21	28.3	13	50
1"管	PG29-34.5	PG29	37	13	20
5/16"管	PF1/2-15.8	G(PF)1/2"	20.9	15	50
3/8"管	PF1/2-18.5	G(PF)1/2"	20.9	15	50
1/2"管	PF1/2-21.2	G(PF)1/2"	20.9	15	50
3/4"管	PF3/4-28.5	G(PF)3/4"	26.4	15	50
1"管	PF1-34.5	G(PF)1"	33.2	15	20
1 1/4"管	PF1 1/4-42.5	G(PF)1 1/4"	41.9	15	10
1 1/2"管	PF1 1/2-48	G(PF)1 1/2"	48	15	10
2"管	PF2-54.5	G(PF)2"	60	15	10

简式金属软管接头
Normal Metal Flexible Conduit Fitting

规格灵活可定制
免费样品提供

Size型号	Outer Diameter (A) mm 螺纹外径	Inner Diameter (B) mm 最小通径	Thread Length (C) mm	Total Length (D) mm 结合长度	Spanner Size 扳手径	Conduit Size	
						Inch英寸	Mm毫米
M16×1.5	16	10.8	10	24	19	3/8	12
M20×1.5	20	14.8	10	24.5	24	1/2	16
M25×1.5	25	18.8	12	28	30	3/4	20
M32×1.5	32	25.8	13	29	36	1	25
M40×1.5	40	33.8	15	31.5	46	1-1/4	32
M50×1.5	50	41.8	15	33	55	1-1/2	38
PG11	18.6	10.8	10	30.3	19	3/8	12
PG16	22.5	14.8	10	24.5	24	1/2	16
PG21	28.3	18.8	12	28	30	3/4	20
PG29	37	25.8	13	29	36	1	25
PG36	47	33.8	15	31.5	46	1-1/4	32
PG42	54	41.8	15	33	55	1-1/2	38
NPT3/8″	16.6	10.8	10	30.3	19	3/8	12
NPT1/2″	20.9	14.8	10	24.5	24	1/2	16
NPT3/4″	26.4	18.8	12	28	30	3/4	20
NPT1″	33.2	25.8	13	29	36	1	25
NPT1 1/4″	41.9	33.8	15	31.5	46	1-1/4	32
NPT1 1/2″	48	41.8	15	33	55	1-1/2	38
G(PF)3/8″	16.6	10.8	10	30.3	19	3/8	12
G(PF)1/2″	20.9	14.8	10	24.5	24	1/2	16
G(PF)3/4″	26.4	18.8	12	28	30	3/4	20
G(PF)1″	33.2	25.8	13	29	36	1	25
G(PF)1 1/4″	41.9	33.8	15	31.5	46	1-1/4	32
G(PF)1 1/2″	48	41.8	15	33	55	1-1/2	38

简式金属软管接头
Normal Metal Flexible Conduit Fitting

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF / BSP / PS)牙、NPT牙。
- 产品材质：黄铜镀镍
- 保护等级：IP54
- 工作温度：-40℃至100℃
- 应用：连接金属软管，起到防水保护线缆的作用

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated
- Protection degree: IP54
- Working temperature: -40℃ to 100℃
- Application: Connect metal flexible conduit fitting to protect cables and waterproof
  Accept special size as customized

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

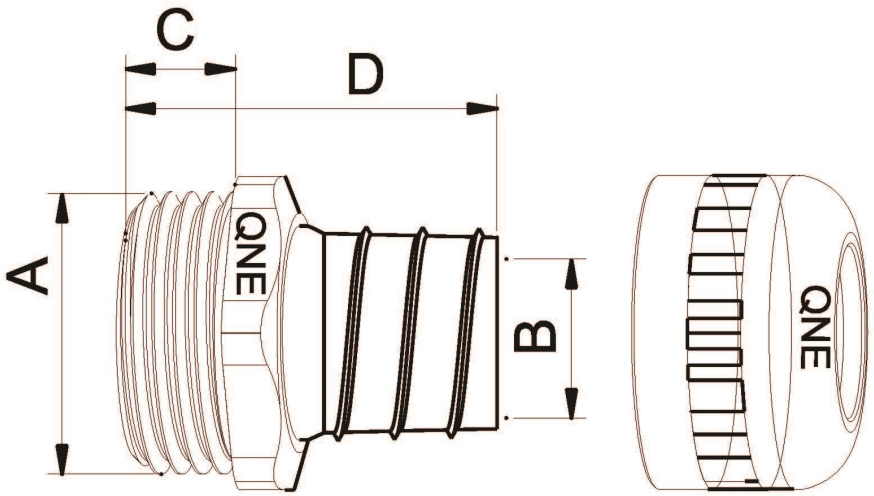

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

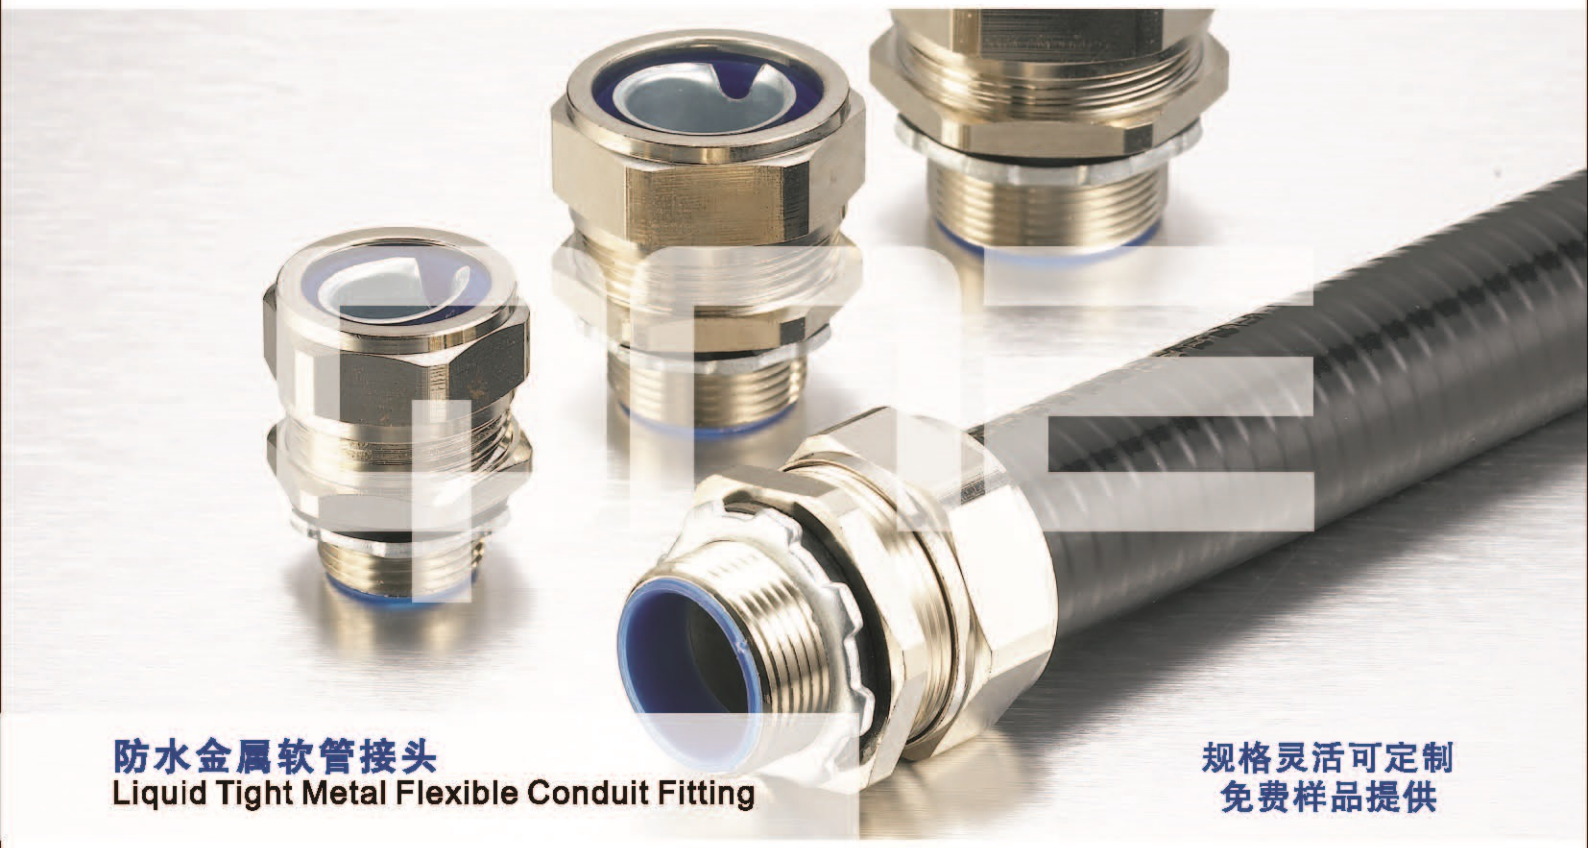

防水金属软管接头
Liquid Tight Metal Flexible Conduit Fitting

规格灵活可定制
免费样品提供

- 螺牙规格：公制牙(Metric)、PG牙、G (PF /BSP / PS)牙、NPT牙。
- 产品材质：C,F部分为黄铜镀镍；A,D部分为铁，E部分为TPE；B部分三元乙丙橡胶
- 保护等级：IP66
- 工作温度：-40℃至100℃
- 应用：连接金属软管，起到防水保护线缆的作用

注：特殊规格需要请联系工厂

- Thread: Metric, PG, G(PF), and NPT thread
- Materials:Brass with nickel plated for C,F parts; metal for A,D parts, TPE plastic for E parts; EPDM rubber for B part.
- Protection degree: IP66
- Working temperature: -40℃ to 100℃
- Application: Connect metal flexible conduit fitting to protect cables and waterproof

Note: Special size and type, please contact us

公制
Metric

PG

G(PF)

NPT

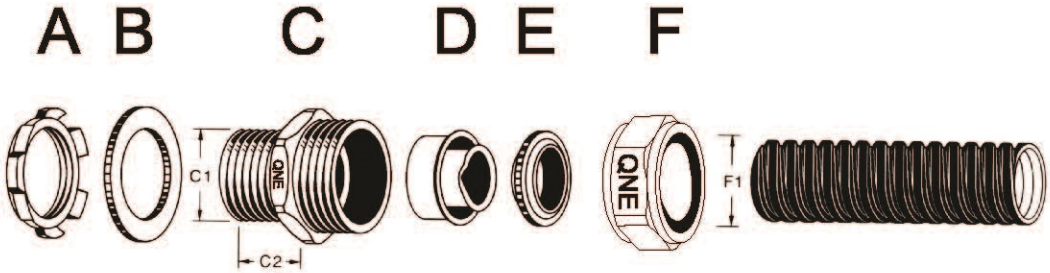

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

防水金属软管接头
Liquid Tight Metal Flexible Conduit Fitting

规格灵活可定制
免费样品提供

Size型号	Outer Diameter(C1)mm 螺纹外径	Inner Diameter mm 最小通径	Thread Length(G2)mm	Total Length mm 结合长度	Spanner Size 扳手径	Conduit Size	
						Inch英寸	Mm毫米
M16×1.5	16	13.8	10	31	25.7	3/8	12
M20×1.5	20	14.8	12	38.1	28.6	1/2	16
M25×1.5	25	18.8	13.5	42.9	34.9	3/4	20
M32×1.5	32	25.8	17.5	46	42.4	1	25
M40×1.5	40	33.4	18	48.5	53	1-1/4	32
M50×1.5	50	39.3	23	58.5	59	1-1/2	38
M63×1.5	63	49.2	28	66.8	74	2	51
PG11	18.6	13.8	10	31	25.7	3/8	12
PG16	22.5	14.8	12	38.1	28.6	1/2	16
PG21	28.3	18.8	13.5	42.9	34.9	3/4	20
PG29	37	25.8	17.5	46	42.4	1	25
PG36	47	33.4	18	48.5	53	1-1/4	32
PG42	54	39.3	23	58.5	59	1-1/2	38
PG48	59.3	49.2	28	66.8	74	2	51
NPT3/8″	16.6	13.8	10	31	25.7	3/8	12
NPT1/2″	20.9	14.8	12	38.1	28.6	1/2	16
NPT3/4″	26.4	18.8	13.5	42.9	34.9	3/4	20
NPT1″	33.2	25.8	17.5	46	42.4	1	25
NPT1 1/4″	41.9	33.4	18	48.5	53	1-1/4	32
NPT1 1/2″	48	39.3	23	58.5	59	1-1/2	38
NPT2″	60	49.2	28	66.8	74	2	51
G(PF)3/8″	16.6	13.8	10	31	25.7	3/8	12
G(PF)1/2″	20.9	14.8	12	38.1	28.6	1/2	16
G(PF)3/4″	26.4	18.8	13.5	42.9	34.9	3/4	20
G(PF)1″	33.2	25.8	17.5	46	42.4	1	25
G(PF)1 1/4″	41.9	33.4	18	48.5	53	1-1/4	32
G(PF)1 1/2″	48	39.3	23	58.5	59	1-1/2	38
G(PF)2″	60	49.2	28	66.8	74	2	51

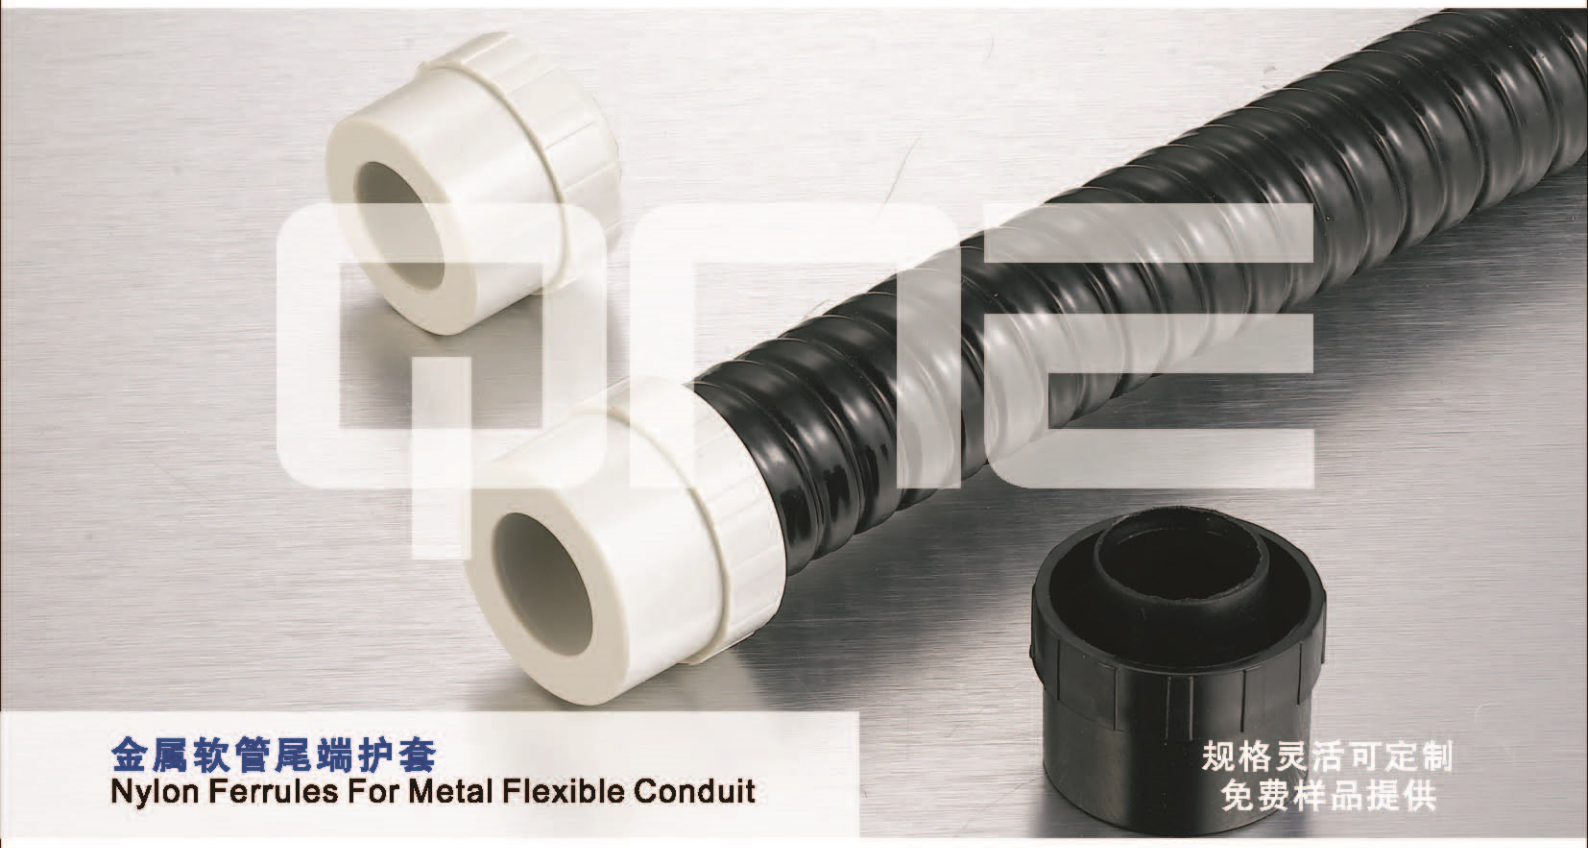

金属软管尾端护套
Nylon Ferrules For Metal Flexible Conduit

规格灵活可定制
免费样品提供

- 产品材质：采用 UL 认可之尼龙 PA66
- 产品颜色：黑色,灰色
- 应用：固定金属蛇管、保护蛇管尾端电缆出线不受磨损及避免作业员受伤。

注：特殊规格需要请联系工厂

- Material: UL approved Halogen-Free Nylon PA66 flammability UL 94V-2);
- Colours: Black(RAL9005), Gray(RAL7035),other color available upon request.
- Application: The nylon Ferrules are designed to protect cables from contacting the sharp edged conduit.

Note: Special size and type, please contact us

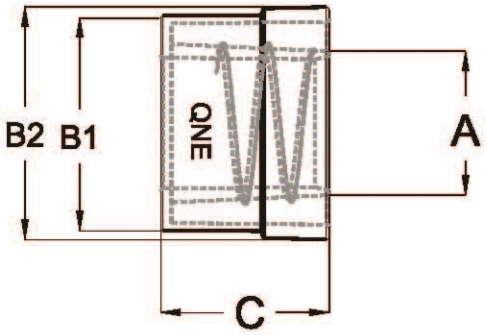

编号Item. No.	适用软管规格 For Conduit Size	尺寸Dimensions			
		A	B1	B2	C
NF5/16	5/16"	9.2	20	20.5	20
NF3/8	3/8"	10.8	20	20.5	21
NF1/2	1/2"	14.2	25	26	24
NF3/4	3/4"	18	30.5	31.5	26
NF1	1"	23.5	36	38	31
NF1 1/4	1 1/4"	32.5	45	40	33
NF1 1/2	1 1/2"	37	52	53	36
NF2	2"	49	64.5	65	35

产品数据不定期更新请联系工厂 (Product Data Updated Aperiodically)

技术螺纹规格说明
Technical Information

Matric ISO Thread Specifications



Size	pitch mm	Outside(ΦD1) mm	Inside(ΦD2) mm	Thru-hole mm
M12×1.5	1.5	12	10.13	12.2
M16×1.5	1.5	16	14.13	16.2
M20×1.5	1.5	20	18.13	20.2
M25×1.5	1.5	25	23.13	25.2
M32×1.5	1.5	32	30.13	32.2
M40×1.5	1.5	40	38.13	40.2
M50×1.5	1.5	50	48.13	50.2
M63×1.5	1.5	63	61.13	63.2

PG Thread Specifications



Size	pitch mm	Outside(ΦD1) mm	Inside(ΦD2) mm	Thru-hole mm
PG 7	1.270	12.5	11.28	12.7
PG 9	1.410	15.2	13.86	15.4
PG 11	1.410	18.6	17.26	18.8
PG 13.5	1.410	20.4	19.06	20.7
PG 16	1.410	22.5	21.16	22.8
PG 21	1.588	28.3	26.78	28.6
PG 29	1.588	37.0	35.48	37.4
PG 36	1.588	47.0	45.48	47.5
PG 42	1.588	54.0	52.48	54.5
PG 48	1.588	59.3	57.78	59.8

NPT Thread Specifications



Size	pitch mm	Outside(Φ) mm	of piches n	Thru-hole mm
1/4"NPT	1.411	13.716	18	
3/8"NPT	1.411	17.145	18	
1/2"NPT	1.814	21.336	14	
3/4"NPT	1.814	26.67	14	
1"NPT	2.208	33.4	11 1/2	
1 1/4"NPT	2.208	42.164	11 1/2	
1 1/2"NPT	2.208	48.26	11 1/2	
2"NPT	2.208	60.325	11 1/2	
2 1/2"NPT	3.175	73.025	8	
3"NPT	3.175	88.9	8	
3 1/2"NPT	3.175	101.6	8	

British G Thread Specifications



Size	pitch mm	Outside(ΦD1) mm	Inside(ΦD2) mm	Thru-hole mm
G1/4"	1.337	13.157	11.145	13.4
G3/8"	1.337	16.662	14.950	17.0
G1/2"	1.814	20.955	18.631	21.3
G5/8"	1.814	26.441	24.117	26.8
G1"	2.309	33.249	30.291	33.7
G1 1/4"	2.309	41.910	38.952	42.4
G1 1/2"	2.309	47.803	44.845	48.3
G2"	2.309	59.614	56.656	60.2
G2 1/2"	3.309	75.184	72.226	75.7
G3"	3.309	87.884	84.926	88.5
G3 1/3"	3.309	100.330	97.372	101.0
G4"	3.309	113.030	110.072	114.0